

# RF to 0-10V/PWM dimming module || 20mA output

ARTICLE NUMBER: 214-179

View this  
product in  
our  
webshop



27.08.2026 - Disclaimer: information subject to change.



RF receiver with 0–10V, 0–5V or 0–15V dimming outputs and 230V relay (max. 5 A). Operates on 100–240V AC and includes PUSH DIM support for local control.

## Key product features

- **Type of control:** RF
- **Number of colour channels:** 1
- **Output voltage (V):** 0 – 15
- **Input voltage (V):** 100 – 240
- **Max. output current (A):** 0.02

## Technical specifications:


|                               |                                               |
|-------------------------------|-----------------------------------------------|
| Product Name                  | RF to 0-10V/PWM dimming module    20mA output |
| Ean                           | 8714984941175                                 |
| Outer box qty                 | 64st                                          |
| Model                         | Dynamic                                       |
| Housing                       | Plastic housing                               |
| Programmable                  | No                                            |
| Max. output current           | 20A                                           |
| Output voltage                | 0 - 15V                                       |
| Suitable for outdoor use      | No                                            |
| Degree of protection (IP)     | IP20                                          |
| Length                        | 170mm                                         |
| Width                         | 59mm                                          |
| Height                        | 29mm                                          |
| Number of zones               | 1                                             |
| Number of colour channels     | 1, Single Colour                              |
| Suitable for surface mounting | Yes                                           |

27.08.2026 - Disclaimer: information subject to change.



|                                |                 |
|--------------------------------|-----------------|
| Suitable for built-in mounting | No              |
| Input voltage                  | 100 - 240V      |
| Control method                 | RF              |
| DIN-rail mounting              | No              |
| Brand                          | Tronix Lighting |
| Compatible with Casambi        | No              |
| Warranty                       | 5 years         |

27.08.2026 - Disclaimer: information subject to change.

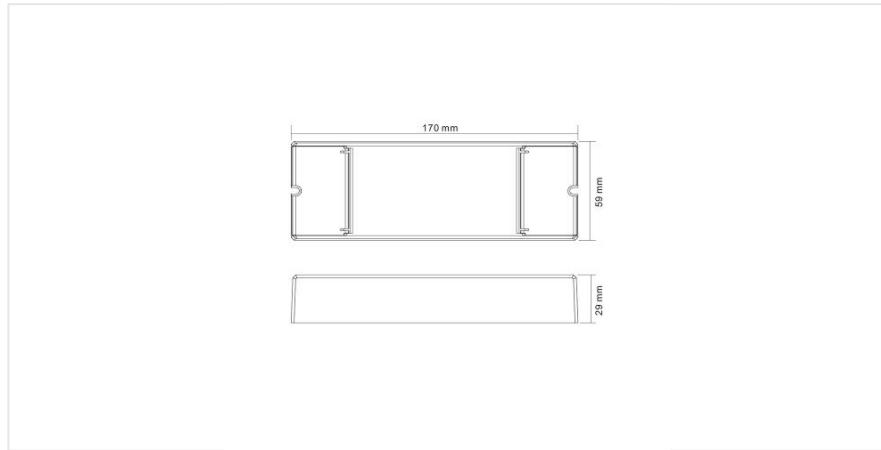

27.08.2026 - Disclaimer: information subject to change.



CARE



SHARE



CONNECT