TRONIX guided by light

Sensor connect | controller | SPI | double sensor

ARTICLE NUMBER: 213-551

View this product in our webshop



15.11.2026 - Disclaimer: information subject to change.

CARE SHARE CONNECT

tronixlighting.com

Controller for digital SPI LED strips with dual sensor input and integrated daylight sensor. Suitable for dynamic lighting effects and automatic lighting control within the Easy Connect system.

Key product features

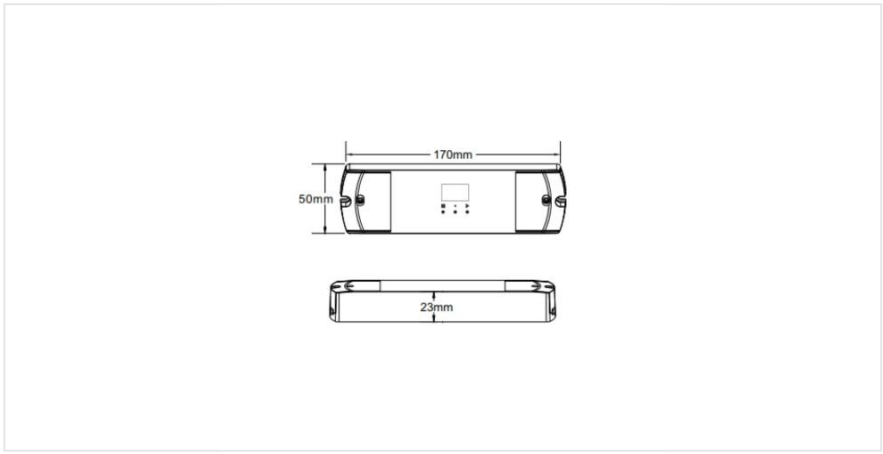
- **Type of control:** SPI
- **Number of colour channels:** 3
- **Output voltage (V):** 5 – 24
- **Input voltage (V):** 5 – 24
- **Max. output current (A):** 15
- **Type of control:** Voltage controlled

Technical specifications:

Product Name	Sensor connect | controller | SPI | double sensor
Ean	8714984954137
Outer box qty	1st
Model	Dynamic
Housing	Plastic housing
Programmable	Yes
Max. output current	15A
Output voltage	5 - 24V
Suitable for outdoor use	No
Degree of protection (IP)	IP20
Length	170mm
Width	50mm
Height	23mm
Number of zones	1
Number of colour channels	3, RGB

15.11.2026 - Disclaimer: information subject to change.

Suitable for surface mounting	Yes
Suitable for built-in mounting	Yes
Input voltage	5 - 24V
Control method	SPI
DIN-rail mounting	No
Brand	Tronix Lighting
Compatible with Casambi	No
Control type	Constant voltage
Warranty	5 years


170mm
50mm
23mm