TRONIX guided by light

Sensor connect | sensor | motion laser | white | recessed

ARTICLE NUMBER: 213-538

View this product in our webshop



15.11.2026 - Disclaimer: information subject to change.

Laser sensor for the Easy Connect system, designed for precise motion detection with adjustable distance and delay time.


Key product features

- **Mounting method:** Recessed
- **Response value sensitivity adjustable:** No
- **Response value luminosity adjustable:** No
- **Max. duty cycle (min):** 1
- **With movement sensor:** Yes
- **With light sensor:** No

Technical specifications:

Product Name	Sensor connect | sensor | motion laser | white | recessed
Ean	8714984954083
Outer box qty	1st
Colour	White
Type	Movement sensor
Material	Plastic
Material quality	Thermoplastic
Sensor connect	Yes
Mounting method	Flush-mounted
Mounting height	2.5m
Suitable for degree of protection (IP)	IP20
Suitable for wireless transmission	No
Constant light control	No
Networkable	No
Max. reach sideways	2.5m
Max. reach frontally	2.5m

Detection angle horizontal	10 - 10??
Max. duty cycle	1min
With presence detector	No
With movement sensor	Yes
With light sensor	No
Response value sensitivity adjustable	No
Response value luminosity adjustable	No
Teach-function for response value luminosity	No
Dim function with dimmer basic element	No
Switch-off delay self-learning	No
Operation mode switch	No
Staircase light controller	No
Halogen free	Yes
RAL-number (similar)	9016
Surface finishing	Matt
Warranty	5 years
Dimming D4i	No

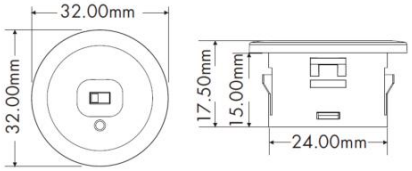

15.11.2026 - Disclaimer: information subject to change.