TRONIX guided by light

Spot | 24V | 20W | 30° | IP66 | RGBW | DMX512

ARTICLE NUMBER: 190-130

View this product in our webshop



15.11.2026 - Disclaimer: information subject to change.

This RGBW LED spotlight has a high resistance to weather such as rain and UV rays. The base is 150° adjustable, allowing the spotlight to illuminate an object or facade from the correct position. In addition, the spot has a venting valve for proper heat and condensation dissipation.

Features

- RGBW: Red, green, blue, warm white (3000K)
- DMX512 controllable
- Polycarbonate lens, aluminium powder coated, stainless steel screws
- Beam angle 30°
- Programmed on DMX channel 1 (other channels possible)

Our LED RGB fixtures collection

The collection of LED RGB fixtures offers plenty of possibilities in terms of powerful, colorful lighting for facades and properties. These wall washers feature powerful LED chips in a sturdy frame, which offers high resistance to UV rays and weather. These fixtures also work on the basis of DMX512, so that every project can be taken care of down to the last detail.

Technical specifications:

Product Name	Spot | 24V | 20W | 30° | IP66 | RGBW | DMX512
Ean	8714984949027
Outer box qty	6st
Lamp type	LED not exchangeable
Lamp holder	None
Housing colour	Black
Housing material	Aluminium
Material cover	Glass transparent
Length	190mm
Width	125mm

15.11.2026 - Disclaimer: information subject to change.


Height/depth	182mm
Built-in length	- - -mm
Built-in width	- - -mm
Built-in height	- - -mm
Built-in diameter	0 - 0mm
Suitable for built-in mounting	No
Suitable for surface mounting	Yes
Suitable for pedestal/floor mounting	Yes
Suitable for wall mounting	Yes
Suitable for ceiling mounting	Yes
Suitable for light-track mounting	No
Suitable for clamp-mounting	No
With movement sensor	No
With light sensor	No
Colour of light	Multi-coloured
Colour consistency (McAdam ellipse)	SDCM3
Colour of light adjustable	Continuously variable
Reflector colour	Silver
Colour temperature	RGBW
Colour rendering index CRI	80-89
Luminous flux adjustable	Continuously variable
Light outlet	Direct
Beam angle	11-20° - Narrow beam
Beam angle adjustable	No
Voltage type	DC
Nominal voltage	24 - 24V
Nominal current	- - -mA


15.11.2026 - Disclaimer: information subject to change.

Number of poles	5
Light distributor	Focal lens
Light distribution	Symmetric
Connectable conductor cross section	0.5 - 1mm²
Type of control gear	LED operating device voltage-controlled
Exchangeable control gear	No
With control gear	No
Degree of protection (IP), front side	IP66
Surface protection	Powder coating
Impact strength	IK08
Max. system power	20W
Rated luminous flux according to IEC 62722-2- 1	- - -lm
Luminaire efficacy	- - -lm/W
Power factor	0.9
Suitable for lamp power	0 - 0W
Surface brushed	No
Type of wiring	Loop-through wiring included
Emergency power supply system	None
Emergency function monitoring system	None
Adjustability	Rotatable
Reflector	None
Warranty	5 years
Ambient temperature	-20 - 50°C
UGR level (Unified Glare Rating)	= 19

15.11.2026 - Disclaimer: information subject to change.



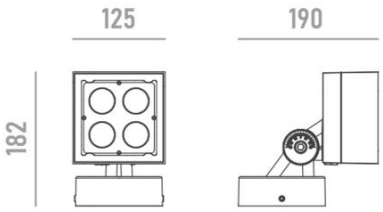

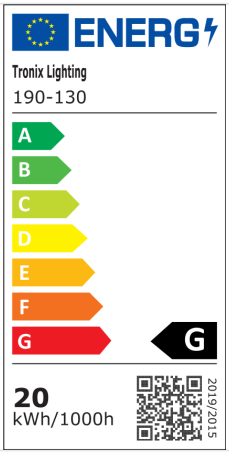

15.11.2026 - Disclaimer: information subject to change.