TRONIX guided by light

# Spot | black | cut out Ø68-73mm | 6W | 3000K | dim

ARTICLE NUMBER: 136-103

View this product in our webshop



15.11.2026 - Disclaimer: information subject to change.

This downlight is an efficient replacement for GU10 spotlights. The deep housing and high-quality reflector minimize glare and allow for subtle placement in the ceiling. The internal driver allows quick, easy installation.

**Key product features:**

- **Max. system power (W)**: 6
- **Colour temperature (K)**: 3000
- **Housing colour**: Black
- **Beam angle:** 21-40° - Medium beam
- **Outer diameter (mm):** 81
- **Built-in diameter (mm)**: 68 – 73
- **Dimmable:** Yes

**Technical specifications:**

| | |
|---|---|
| Product Name | Spot \| black \| cut out Ø68-73mm \| 6W \| 3000K \| dim |
| Ean | 8714984932616 |
| Outer box qty | 60st |
| Lamp type | LED not exchangeable |
| Lamp holder | None |
| Housing colour | Black |
| Housing material | Plastic |
| Material cover | Plastic, transparent |
| Connection type | Stripped wire |
| Height/depth | 87.7mm |
| Outer diameter | 81mm |
| Built-in length | - - -mm |
| Built-in width | - - -mm |
| Built-in height | 87.7 - -mm |
| Built-in diameter | 68 - 73mm |

15.11.2026 - Disclaimer: information subject to change.

| | |
|---|---|
| Suitable for built-in mounting | Yes |
| Suitable for surface mounting | No |
| Suitable for pedestal/floor mounting | No |
| Suitable for wall mounting | No |
| Suitable for ceiling mounting | Yes |
| Suitable for light-track mounting | No |
| Suitable for clamp-mounting | Yes |
| With movement sensor | No |
| With presence detector | No |
| With light sensor | No |
| Colour of light | White |
| Colour consistency (McAdam ellipse) | SDCM3 |
| Colour of light adjustable | No |
| Reflector colour | Black |
| Colour temperature | 3000K |
| Colour rendering index CRI | 80-89 |
| Luminous flux adjustable | Continuously variable |
| Light outlet | Direct |
| Beam angle | 21-40° - Medium beam |
| Beam angle adjustable | No |
| Voltage type | AC |
| Nominal voltage | 220 - 240V |
| Nominal current | 28 - 28mA |
| Number of poles | 2 |
| Light distributor | Reflector |
| Light distribution | Symmetric |
| Connectable conductor cross section | 0.75 - 2.5mm² |

15.11.2026 - Disclaimer: information subject to change.


| | |
|---|---|
| Type of control gear | LED operating device current-controlled |
| Exchangeable control gear | No |
| With control gear | Yes |
| Degree of protection (IP), front side | IP44 |
| Degree of protection (IP), rear side | IP20 |
| Surface protection | Untreated |
| Impact strength | IK02 |
| Rated lifetime L70/B50 at 25 °C | 30000h |
| Max. system power | 6W |
| Rated luminous flux according to IEC 62722-2- 1 | 420 - 420lm |
| Luminaire efficacy | 70 - 70lm/W |
| Power factor | 0.95 |
| Suitable for lamp power | 0 - 0W |
| Dimming method | Trailing edge dimming |
| Surface brushed | No |
| Type of wiring | Ending |
| Emergency power supply system | None |
| Emergency function monitoring system | None |
| Adjustability | not adjustable |
| Reflector | High-gloss |
| Warranty | 3 years |
| Ambient temperature | -20 - 40°C |
| UGR level (Unified Glare Rating) | = 16 |


15.11.2026 - Disclaimer: information subject to change.







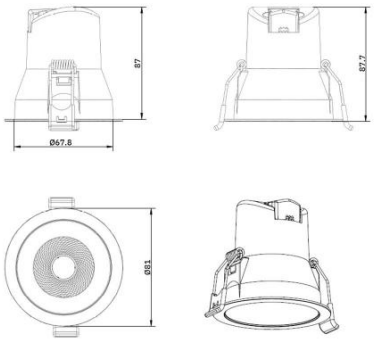

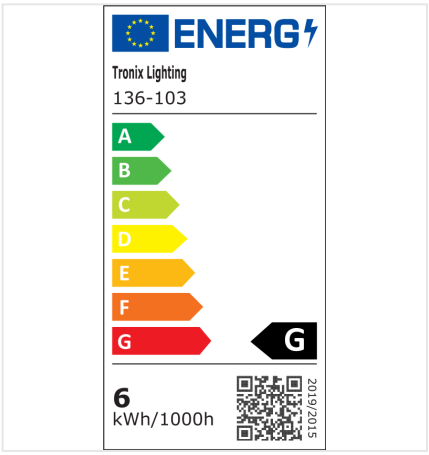
15.11.2026 - Disclaimer: information subject to change.