# Street light 38W || 4000K | Cree LED | Philips driver

ARTICLE NUMBER: 220-050

View this product in our webshop



15.11.2026 - Disclaimer: information subject to change.

Streetlight with Cree XP-G3 LEDs and Philips driver with maximum energy efficiency and reliability. With IP66 rating and surge protection, this lantern is ideal for sustainable lighting of parking lots and business areas.

**Key product features:**

- **Degree of protection (IP):** IP66
- **Suitable for spigot size (mm):** 60
- **Impact strength:** IK09
- **Color temperature (K):** 4000
- **Max. system power (W):** 38
- **Rated luminous flux accoring to IEC 62722-2-1 (lm):** 4535

**Technical specifications:**

| | |
|---|---|
| Product Name | Street light 38W \|\| 4000K \| Cree LED \| Philips driver |
| Ean | 8714984930285 |
| Outer box qty | 2st |
| Dimmable | No |
| Type | Streetlight |
| Lamp type | LED not exchangeable |
| Lamp holder | None |
| Housing colour | Anthracite |
| Housing material | Aluminium |
| Material cover | Plastic, transparent |
| Connection type | Push-in clamp |
| Mounting method | Post top/side entry |
| Length | 450mm |
| Width | 230mm |
| Height/depth | 100mm |
| Colour of light | White |

15.11.2026 - Disclaimer: information subject to change.

| | |
|---|---|
| Colour consistency (McAdam ellipse) | SDCM6 |
| Colour temperature | 4000 - 4000K |
| Colour rendering index CRI | 70-79 |
| Voltage type | AC |
| Nominal voltage | 232 - 232V |
| Nominal current | 167 - 167mA |
| Suitable for lamp power | 0 - 0W |
| Suitable for spigot size | 60 - 60mm |
| Number of poles | 3 |
| Light source included | Yes, fixed LED |
| Light distributor | Other |
| With connection cable | No |
| Connectable conductor cross section | 0.75 - 2.5mm?? |
| Type of control gear | LED operating device current-controlled |
| Exchangeable control gear | No |
| With control gear | Yes |
| Degree of protection (IP) | IP66 |
| Surface protection | Powder coating |
| Impact strength | IK09 |
| Rated lifetime L70/B50 at 25 ??C | 50000h |
| Max. system power | 38W |
| Rated luminous flux according to IEC 62722-2- 1 | 4940 - 4940lm |
| Luminaire efficacy | 140lm/W |
| Power factor | 0.96 |
| Type of wiring | Ending |
| Warranty | 3 years |

15.11.2026 - Disclaimer: information subject to change.

| | |
|---|---|
| Ambient temperature | -20 - 45??C |












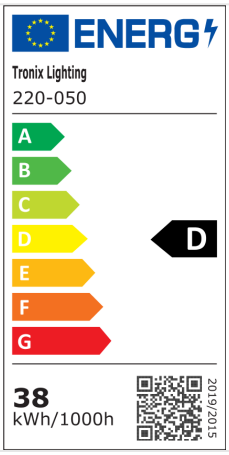


15.11.2026 - Disclaimer: information subject to change.