

# Street light 73W || 4000K | Cree LED | Philips driver

ARTICLE NUMBER: 220-051

View this  
product in  
our  
webshop



24.08.2026 - Disclaimer: information subject to change.



Streetlight with Cree XP-G3 LEDs and Philips driver with maximum energy efficiency and reliability. With IP66 rating and surge protection, this lantern is ideal for sustainable lighting of parking lots and business areas.

## Key product features:

- **Degree of protection (IP):** IP66
- **Suitable for spigot size (mm):** 60
- **Impact strength:** IK09
- **Colour temperature (K):** 4000
- **Max. system power (W):** 73
- **Rated luminous flux according to IEC 62722-2-1 (lm):** 8924

## Technical specifications:

|                  |                                                       |
|------------------|-------------------------------------------------------|
| Product Name     | Street light 73W    4000K   Cree LED   Philips driver |
| Ean              | 8714984932937                                         |
| Outer box qty    | 2st                                                   |
| Dimmable         | No                                                    |
| Type             | Streetlight                                           |
| Lamp type        | LED not exchangeable                                  |
| Lamp holder      | None                                                  |
| Housing colour   | Anthracite                                            |
| Housing material | Aluminium                                             |
| Material cover   | Glass transparent                                     |
| Connection type  | Push-in clamp                                         |
| Mounting method  | Post top/side entry                                   |
| Length           | 450mm                                                 |
| Width            | 230mm                                                 |
| Height/depth     | 100mm                                                 |
| Colour of light  | White                                                 |

24.08.2026 - Disclaimer: information subject to change.

|                                                 |                                         |
|-------------------------------------------------|-----------------------------------------|
| Colour consistency (McAdam ellipse)             | SDCM6                                   |
| Colour temperature                              | 4000 - 4000K                            |
| Colour rendering index CRI                      | 70-79                                   |
| Voltage type                                    | AC                                      |
| Nominal voltage                                 | 233 - 233V                              |
| Nominal current                                 | 323 - 323mA                             |
| Suitable for lamp power                         | 0 - 0W                                  |
| Suitable for spigot size                        | 60 - 60mm                               |
| Number of poles                                 | 3                                       |
| Light source included                           | Yes, fixed LED                          |
| Light distributor                               | Other                                   |
| With connection cable                           | No                                      |
| Connectable conductor cross section             | 0.75 - 2.5mm??                          |
| Type of control gear                            | LED operating device current-controlled |
| Exchangeable control gear                       | No                                      |
| With control gear                               | Yes                                     |
| Degree of protection (IP)                       | IP66                                    |
| Surface protection                              | Powder coating                          |
| Impact strength                                 | IK09                                    |
| Rated lifetime L70/B50 at 25 ??C                | 50000h                                  |
| Max. system power                               | 73W                                     |
| Rated luminous flux according to IEC 62722-2- 1 | 9490 - 9490lm                           |
| Luminaire efficacy                              | 129lm/W                                 |
| Power factor                                    | 0.98                                    |
| Type of wiring                                  | Ending                                  |
| Warranty                                        | 3 years                                 |

24.08.2026 - Disclaimer: information subject to change.



Ambient temperature

-20 - 45??C

24.08.2026 - Disclaimer: information subject to change.




CARE



SHARE



CONNECT

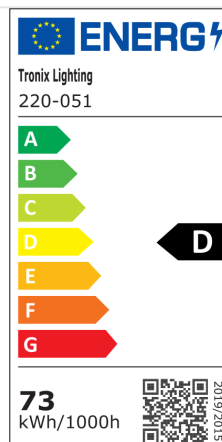

24.08.2026 - Disclaimer: information subject to change.