

T48/20 | pendant | Ø26mm | black | 5W |
2700K | 36° | DALI

ARTICLE NUMBER: 168-176

View this
product in
our
webshop



14.09.2026 - Disclaimer: information subject to change.



CARE



SHARE



CONNECT



This 48V pendant spot with DALI-2 control offers precise dimming down to 0.1% and high colour rendering. This suspended version is ideal for professional 48V track systems where the light source needs to be positioned closer to the surface being illuminated, such as above counters, tables, displays and workstations.

Key product features

- **Nominal voltage (V):** 48 - 48
- **Max. system power (W):** 5
- **Colour temperature (K):** 2700 - 2700
- **Housing colour:** Black
- **Outer diameter (mm):** 26
- **Dimming DALI-2:** Yes

Technical specifications:

Product Name	T48/20 pendant Ø26mm black 5W 2700K 36° DALI
Ean	8714984956476
Outer box qty	20st
Lamp type	LED not exchangeable
Housing colour	Black
Housing material	Aluminium
Material cover	Without cover
Length	200mm
Outer diameter	26mm
Built-in length	- - -mm
Built-in width	- - -mm

14.09.2026 - Disclaimer: information subject to change.

Built-in height	- - -mm
Built-in diameter	- - -mm
Suitable for built-in mounting	Yes
Suitable for surface mounting	Yes
Suitable for pedestal/floor mounting	No
Colour	Black
Suitable for wall mounting	Yes
Suitable for ceiling mounting	No
Suitable for light-track mounting	Yes
Suitable for clamp-mounting	No
With movement sensor	No
With presence detector	No
With light sensor	No
Colour of light	White
Colour consistency (McAdam ellipse)	SDCM3
Colour of light adjustable	No
Colour temperature	2700K
Colour rendering index CRI	90-100
Luminous flux adjustable	Continuously variable
Light outlet	Direct
Beam angle	21-40° - Medium beam
Beam angle adjustable	No
Voltage type	DC
Nominal voltage	48 - 48V
Nominal current	125 - 125mA
Number of poles	4
Light source included	Yes, fixed LED

14.09.2026 - Disclaimer: information subject to change.

Light distributor	Focal lens
Light distribution	Symmetric
Connectable conductor cross section	- - -mm ²
Type of control gear	LED operating device voltage-controlled
Exchangeable control gear	Yes
With control gear	No
Degree of protection (IP), front side	IP20
Degree of protection (IP), rear side	IP20
Surface protection	Powder coating
Impact strength	IK00
Rated lifetime L70/B50 at 25 °C	50000h
Max. system power	5W
Rated luminous flux according to IEC 62722-2- 1	420 - 420lm
Luminaire efficacy	70 - 70lm/W
Power factor	1
Suitable for lamp power	- - -W
Dimming method	DALI
Surface brushed	No
Type of wiring	Ending
Emergency power supply system	None
Emergency function monitoring system	None
Adjustability	not adjustable
Unified Glare Ratio (UGR)	17
Reflector	None
Warranty	5 years
Ambient temperature	-20 - 45°C

14.09.2026 - Disclaimer: information subject to change.



Input voltage tracklights

48V

Control type

Constant voltage

14.09.2026 - Disclaimer: information subject to change.





CARE



SHARE



CONNECT

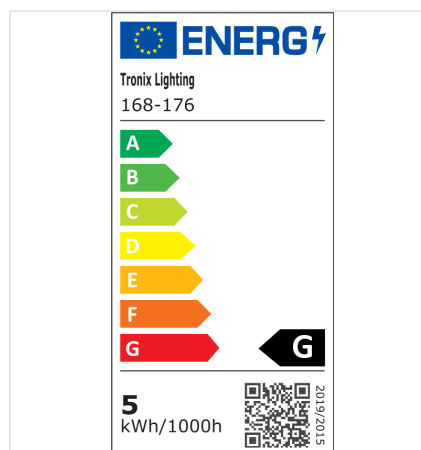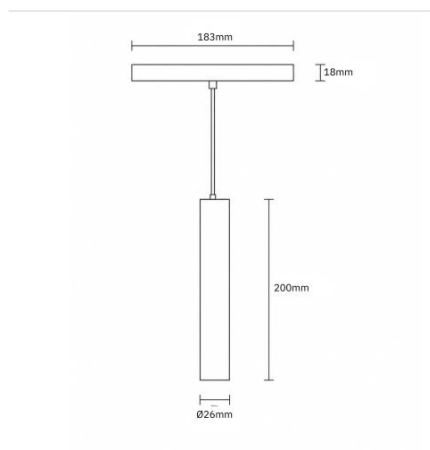

14.09.2026 - Disclaimer: information subject to change.