

T48/20 | pendant | Ø26mm | black | 5W |  
3000K | 36° | DALI

ARTICLE NUMBER: 168-177

View this  
product in  
our  
webshop



14.09.2026 - Disclaimer: information subject to change.



CARE



SHARE



CONNECT



This 48V pendant spot with DALI-2 control offers precise dimming down to 0.1% and high colour rendering. This suspended version is ideal for professional 48V track systems where the light source needs to be positioned closer to the surface being illuminated, such as above counters, tables, displays and workstations.

## Key product features

- **Nominal voltage (V):** 48 - 48
- **Max. system power (W):** 5
- **Colour temperature (K):** 3000 - 3000
- **Housing colour:** Black
- **Outer diameter (mm):** 26
- **Dimming DALI-2:** Yes

## Technical specifications:

|                  |                                                            |
|------------------|------------------------------------------------------------|
| Product Name     | T48/20   pendant   Ø26mm   black   5W   3000K   36°   DALI |
| Ean              | 8714984956483                                              |
| Outer box qty    | 20st                                                       |
| Lamp type        | LED not exchangeable                                       |
| Housing colour   | Black                                                      |
| Housing material | Aluminium                                                  |
| Material cover   | Without cover                                              |
| Length           | 200mm                                                      |
| Outer diameter   | 26mm                                                       |
| Built-in length  | - - -mm                                                    |
| Built-in width   | - - -mm                                                    |

14.09.2026 - Disclaimer: information subject to change.

|                                      |                       |
|--------------------------------------|-----------------------|
| Built-in height                      | - - -mm               |
| Built-in diameter                    | - - -mm               |
| Suitable for built-in mounting       | Yes                   |
| Suitable for surface mounting        | Yes                   |
| Suitable for pedestal/floor mounting | No                    |
| Colour                               | Black                 |
| Suitable for wall mounting           | Yes                   |
| Suitable for ceiling mounting        | No                    |
| Suitable for light-track mounting    | Yes                   |
| Suitable for clamp-mounting          | No                    |
| With movement sensor                 | No                    |
| With presence detector               | No                    |
| With light sensor                    | No                    |
| Colour of light                      | White                 |
| Colour consistency (McAdam ellipse)  | SDCM3                 |
| Colour of light adjustable           | No                    |
| Colour temperature                   | 3000K                 |
| Colour rendering index CRI           | 90-100                |
| Luminous flux adjustable             | Continuously variable |
| Light outlet                         | Direct                |
| Beam angle                           | 21-40° - Medium beam  |
| Beam angle adjustable                | No                    |
| Voltage type                         | DC                    |
| Nominal voltage                      | 48 - 48V              |
| Nominal current                      | 125 - 125mA           |
| Number of poles                      | 4                     |
| Light source included                | Yes, fixed LED        |

14.09.2026 - Disclaimer: information subject to change.

|                                                 |                                         |
|-------------------------------------------------|-----------------------------------------|
| Light distributor                               | Focal lens                              |
| Light distribution                              | Symmetric                               |
| Connectable conductor cross section             | - - -mm <sup>2</sup>                    |
| Type of control gear                            | LED operating device voltage-controlled |
| Exchangeable control gear                       | Yes                                     |
| With control gear                               | No                                      |
| Degree of protection (IP), front side           | IP20                                    |
| Degree of protection (IP), rear side            | IP20                                    |
| Surface protection                              | Powder coating                          |
| Impact strength                                 | IK00                                    |
| Rated lifetime L70/B50 at 25 °C                 | 50000h                                  |
| Max. system power                               | 5W                                      |
| Rated luminous flux according to IEC 62722-2- 1 | 420 - 420lm                             |
| Luminaire efficacy                              | 70 - 70lm/W                             |
| Power factor                                    | 1                                       |
| Suitable for lamp power                         | - - -W                                  |
| Dimming method                                  | DALI                                    |
| Surface brushed                                 | No                                      |
| Type of wiring                                  | Ending                                  |
| Emergency power supply system                   | None                                    |
| Emergency function monitoring system            | None                                    |
| Adjustability                                   | not adjustable                          |
| Unified Glare Ratio (UGR)                       | 17                                      |
| Reflector                                       | None                                    |
| Warranty                                        | 5 years                                 |
| Ambient temperature                             | -20 - 45°C                              |

14.09.2026 - Disclaimer: information subject to change.



Input voltage tracklights

48V

Control type

Constant voltage

14.09.2026 - Disclaimer: information subject to change.





CARE



SHARE



CONNECT

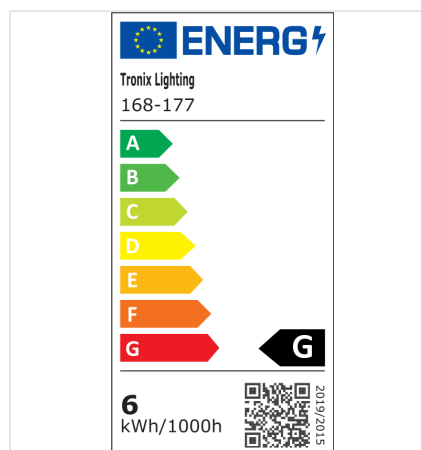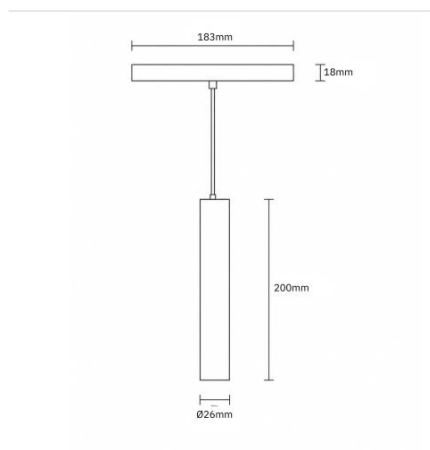

14.09.2026 - Disclaimer: information subject to change.