

Track spot | 3-phase | black | linear | 16W |
3000K | dim

ARTICLE NUMBER: 169-310

View this
product in
our
webshop



11.08.2026 - Disclaimer: information subject to change.



This sturdy track spot operates with a warm white light color (3000K) and features a very wide beam angle of >80° for ideal light distribution.

Rails & accessories - 3 phase track

Tronix Lighting offers a wide and diverse range in terms of 3 phase tracks and matching accessories. Each product is available in matching colors for a beautiful, customized result.

Features

- Colortemperature: 3000K
- Very wide beam angle of >80°

Technical specifications:

Product Name	Track spot 3-phase black linear 16W 3000K dim
Ean	8714984932883
Outer box qty	12st
Lamp type	LED not exchangeable
Lamp holder	None
Housing colour	Black
Housing material	Plastic
Material cover	Other
Length	650mm
Width	32.5mm
Height/depth	52mm
Built-in length	- - -mm
Built-in width	- - -mm
Built-in height	- - -mm
Built-in diameter	0 - 0mm
Suitable for built-in mounting	No
Suitable for surface mounting	Yes



11.08.2026 - Disclaimer: information subject to change.

Suitable for pedestal/floor mounting	No
Colour	Black
Suitable for wall mounting	No
Suitable for ceiling mounting	Yes
Suitable for light-track mounting	Yes
Suitable for clamp-mounting	No
With movement sensor	No
With light sensor	No
Colour of light	White
Colour consistency (McAdam ellipse)	SDCM3
Colour of light adjustable	No
Reflector colour	Silver
Colour temperature	3000K
Colour rendering index CRI	90-100
Luminous flux adjustable	No
Light outlet	Direct/indirect
Beam angle	41-80° - Wide beam
Beam angle adjustable	No
Voltage type	AC
Nominal voltage	220 - 240V
Nominal current	68 - 68mA
Number of poles	3
Light source included	Yes, fixed LED
Light distributor	Reflector
Light distribution	Symmetric
Connectable conductor cross section	0 - 0mm ²
Type of control gear	LED operating device current-controlled

11.08.2026 - Disclaimer: information subject to change.

Exchangeable control gear	No
With control gear	Yes
Degree of protection (IP), rear side	IP20
Surface protection	Untreated
Impact strength	IK02
Rated lifetime L70/B50 at 25 °C	50000h
Max. system power	16W
Rated luminous flux according to IEC 62722-2- 1	1440 - 1444lm
Luminaire efficacy	90 - 90lm/W
Power factor	0.93
Suitable for lamp power	0 - 0W
Surface brushed	No
Type of wiring	Ending
Emergency power supply system	None
Emergency function monitoring system	None
Adjustability	not adjustable
Unified Glare Ratio (UGR)	18.3
Reflector	High-gloss
Warranty	5 years
Ambient temperature	-20 - 45°C
Input voltage tracklights	230V

11.08.2026 - Disclaimer: information subject to change.

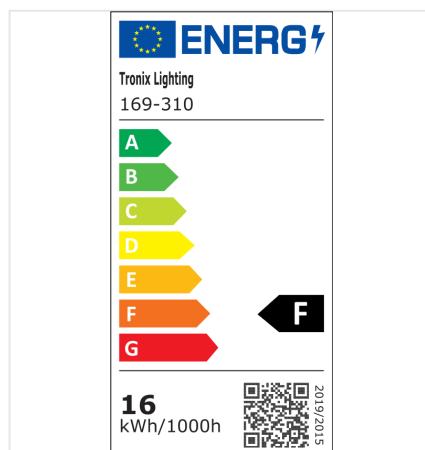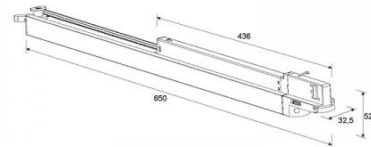

11.08.2026 - Disclaimer: information subject to change.