

Track spot | 3-phase | white | linear | 3-CCT | dim

ARTICLE NUMBER: 169-308

View this
product in
our
webshop



11.08.2026 - Disclaimer: information subject to change.



CARE



SHARE



CONNECT

This linear track spot is equipped with an opal cover, making it suitable for rooms where less light glare is desired. In addition, this track spot is easy to set in the color temperatures 3000K, 4000K or 5700K, making it widely applicable. Think of retail or office buildings.

Rails & accessories - 3 phase track

Tronix Lighting offers a wide and diverse range in terms of 3 phase tracks and matching accessories. Each product is available in matching colors for a beautiful, customized result.

Features

- Pre-settable by CCT switch in the color temperatures 3000K, 4000K and 5700K
- Dimmable
- Long lifespan of 50.000 hours

Technical specifications:

Product Name	Track spot 3-phase white linear 3-CCT dim
Ean	8714984946101
Outer box qty	12st
Lamp type	LED not exchangeable
Lamp holder	None
Housing colour	White
Housing material	Plastic
Material cover	Plastic matt/satinized
Length	650mm
Width	32.5mm
Height/depth	52mm
Built-in length	- - -mm
Built-in width	- - -mm



11.08.2026 - Disclaimer: information subject to change.

Built-in height	- - -mm
Built-in diameter	0 - 0mm
Suitable for built-in mounting	No
Suitable for surface mounting	Yes
Suitable for pedestal/floor mounting	No
Colour	White
Suitable for wall mounting	No
Suitable for ceiling mounting	Yes
Suitable for light-track mounting	Yes
Suitable for clamp-mounting	No
With movement sensor	No
With light sensor	No
Colour of light	White
Colour consistency (McAdam ellipse)	SDCM6
Colour of light adjustable	No
Reflector colour	White
Colour temperature	3000 - 4000 - 5700K
Colour rendering index CRI	80-89
Luminous flux adjustable	No
Light outlet	Direct/indirect
Beam angle	> 80° - Extreme wide beam
Beam angle adjustable	No
Voltage type	AC
Nominal voltage	220 - 240V
Nominal current	68 - 68mA
Number of poles	3
Light source included	Yes, fixed LED

11.08.2026 - Disclaimer: information subject to change.

Light distributor	Diffuser lens/optic/panel
Light distribution	Symmetric
Connectable conductor cross section	0 - 0mm ²
Type of control gear	LED operating device current-controlled
Exchangeable control gear	No
With control gear	Yes
Degree of protection (IP), rear side	IP20
Surface protection	Other
Impact strength	IK02
Rated lifetime L70/B50 at 25 °C	50000h
Max. system power	16W
Rated luminous flux according to IEC 62722-2- 1	1280 - 1280lm
Luminaire efficacy	80 - 80lm/W
Power factor	0.92
Suitable for lamp power	0 - 0W
Surface brushed	No
Type of wiring	Ending
Emergency power supply system	None
Emergency function monitoring system	None
Adjustability	not adjustable
Unified Glare Ratio (UGR)	22.5
Reflector	None
Warranty	5 years
Ambient temperature	-20 - 45°C
Input voltage tracklights	230V

11.08.2026 - Disclaimer: information subject to change.

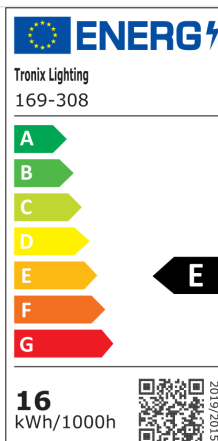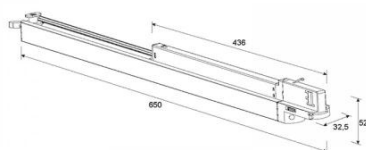

11.08.2026 - Disclaimer: information subject to change.