

Track spot || 3-phase | white | linear | 690mm
| 20W | 3000K

ARTICLE NUMBER: 169-306

View this
product in
our
webshop



18.09.2026 - Disclaimer: information subject to change.



This elongated linear track spot features an opal cover, making this lamp extremely well suited for areas where less light glare is desired. Also, this track spot features a warm white light color, ideal for locations such as the office or a retail store.

Rails & accessories - 3 phase track

Tronix Lighting offers a wide and diverse range in terms of 3 phase tracks and matching accessories. Each product is available in matching colors for a beautiful, customized result.

Features

- Less harsh light thanks to the opal cover
- Color temperature: 3000K
- Long lifespan of 50.000 hours

Technical specifications:

Product Name	Track spot 3-phase white linear 690mm 20W 3000K
Ean	8714984927209
Outer box qty	12st
Lamp type	LED not exchangeable
Lamp holder	None
Housing colour	White
Housing material	Plastic
Material cover	Plastic matt/satinized
Length	690mm
Width	31mm
Height/depth	48mm
Built-in length	- - -mm
Built-in width	- - -mm
Built-in height	- - -mm


18.09.2026 - Disclaimer: information subject to change.

Built-in diameter	0 - 0mm
Suitable for built-in mounting	No
Suitable for surface mounting	Yes
Suitable for pedestal/floor mounting	No
Colour	White
Suitable for wall mounting	No
Suitable for ceiling mounting	Yes
Suitable for light-track mounting	Yes
Suitable for clamp-mounting	No
With movement sensor	No
With light sensor	No
Colour of light	White
Colour consistency (McAdam ellipse)	SDCM3
Colour of light adjustable	No
Reflector colour	White
Colour temperature	3000K
Colour rendering index CRI	90-100
Luminous flux adjustable	No
Light outlet	Direct/indirect
Beam angle	> 80?? - Extreme wide beam
Beam angle adjustable	No
Voltage type	AC
Nominal voltage	220 - 240V
Nominal current	- - -mA
Number of poles	3
Light source included	Yes, fixed LED
Light distributor	Diffuser lens/optic/panel

18.09.2026 - Disclaimer: information subject to change.

Light distribution	Symmetric
Connectable conductor cross section	0 - 0mm??
Type of control gear	LED operating device current-controlled
Exchangeable control gear	No
With control gear	Yes
Degree of protection (IP), rear side	IP20
Surface protection	Other
Impact strength	IK02
Max. system power	20W
Rated luminous flux according to IEC 62722-2- 1	1374 - 1374lm
Luminaire efficacy	69.3 - 69.3lm/W
Power factor	0.9
Suitable for lamp power	0 - 0W
Surface brushed	No
Type of wiring	Ending
Emergency power supply system	None
Emergency function monitoring system	None
Adjustability	not adjustable
Reflector	None
Warranty	5 years
Ambient temperature	-20 - 45??C
Input voltage tracklights	230V

18.09.2026 - Disclaimer: information subject to change.

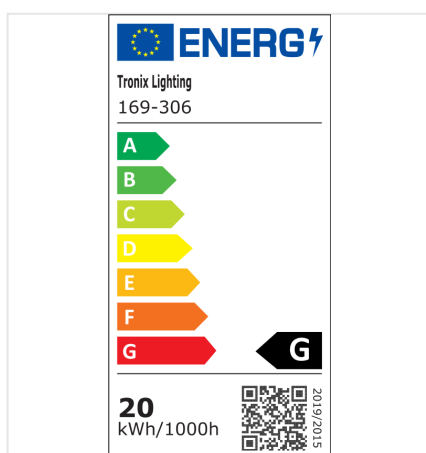

18.09.2026 - Disclaimer: information subject to change.