# Tri-proof lightbar | 1260mm | 40W | 3-CCT | sensor

ARTICLE NUMBER: 950-181

View this product in our webshop



15.11.2026 - Disclaimer: information subject to change.

These Tri-proof light bars are a perfect alternative to traditional fluorescent lamps, thanks in part to its durable and widely applicable design. This light bar is equipped with a high-quality SMD LED chip, ensuring you good and even illumination over a beam angle of 120°. Each product is equipped with waterproof glands, making these light bars come into their own even in damp locations.

**Features**

- High lumen efficiency with 120Lm/W
- High degree of protection, IP65 and IK08
- Power adjustable by a DIP switch in the wattages 25W, 30W, 35W and 40W
- Light color adjustable by a CCT switch into the color temperatures 3000K, 4000K and 5700K
- Includes microwave sensor with a 140-degree beam angle and a range of 4 to 6 meters
- Can couple up to 1500 watts, thanks in part to internal conduit wiring
- Easy installation as surface mounted
- Flicker-free, internal driver

**Technical specifications:**

| | |
|---|---|
| Product Name | Tri-proof lightbar \| 1260mm \| 40W \| 3-CCT \| sensor |
| Ean | 8714984949560 |
| Outer box qty | 12st |
| Dimmable | No |
| Connection type | Push-in clamp |
| Lamp type | LED exchangeable |
| Housing colour | Grey |
| Material | Plastic |
| Length | 120cm |

| | |
|---|---|
| Length | 1260mm |
| Width | 89mm |
| Height/depth | 70mm |
| Movement sensor/presence detector technology | High frequency |
| With movement sensor | Yes |
| With presence detector | Yes |
| With light sensor | Yes |
| Colour of light | White |
| Colour temperature | 3000 - 4000 - 5700K |
| Colour rendering index CRI | 80-89 |
| Colour of light adjustable | Positions |
| Luminous flux adjustable | Positions |
| Beam angle adjustable | No |
| Voltage type | AC |
| Nominal voltage | 220 - 240V |
| Nominal current | 166 - 166mA |
| Number of poles | 4 |
| Light distributor | Diffuser lens/optic/panel |
| Connectable conductor cross section | 1 - 2.5mm?? |
| Type of control gear | LED operating device current-controlled |
| Exchangeable control gear | No |
| With control gear | Yes |
| Degree of protection (IP) | IP65 |
| Impact strength | IK08 |
| Rated lifetime L70/B50 at 25 ??C | 102000h |
| Max. system power | 40W |

15.11.2026 - Disclaimer: information subject to change.


| | |
|---|---|
| Rated luminous flux according to IEC 62722-2- 1 | 3250 - 5200lm |
| Luminaire efficacy | 130lm/W |
| Power factor | 0.97 |
| Type of wiring | Loop-through wiring included |
| Suitable for emergency lighting | No |
| Emergency power supply system | None |
| Emergency function monitoring system | None |
| Warranty | 5 years |







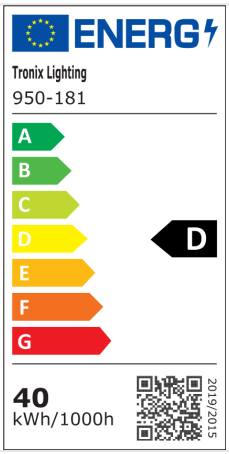


15.11.2026 - Disclaimer: information subject to change.