

# Tri-proof lightbar | 1260mm | 40W | 3CCT | emerg.+sensor dim

ARTICLE NUMBER: 950-187

View this  
product in  
our  
webshop



25.08.2026 - Disclaimer: information subject to change.

These Tri-proof light bars are a perfect alternative to traditional fluorescent lamps, thanks in part to its durable and widely applicable design. This light bar is equipped with a high-quality SMD LED chip, ensuring you good and even illumination over a beam angle of 120°. Each product is equipped with waterproof glands, making these light bars come into their own even in damp locations. Equipped with adjustable microwave motion sensor that can dim the fixture when no motion is detected.

### Features

- High lumen efficiency with 120Lm/W
- High degree of protection, IP65 and IK08
- Power adjustable by a DIP switch in the wattages 25W, 30W, 35W and 40W
- Light color adjustable by a CCT switch into the color temperatures 3000K, 4000K and 5700K
- Includes dimmable microwave motion sensor with dimming levels up to 10% or 30%, a range of up to 5 meters and a hold time of up to 30 minutes
- Includes emergency functionality to automatically switch to the internal battery when power is not available
- Can couple up to 1500 watts, thanks in part to internal conduit wiring
- Easy installation as surface mounted
- Flicker-free, internal driver

### Technical specifications:

|               |                                                              |
|---------------|--------------------------------------------------------------|
| Product Name  | Tri-proof lightbar   1260mm   40W   3CCT   emerg.+sensor dim |
| Ean           | 8714984950832                                                |
| Outer box qty | 12st                                                         |
| Dimmable      | Yes                                                          |

25.08.2026 - Disclaimer: information subject to change.


|                                              |                                         |
|----------------------------------------------|-----------------------------------------|
| Connection type                              | Push-in clamp                           |
| Lamp type                                    | LED exchangeable                        |
| Housing colour                               | Grey                                    |
| Material                                     | Plastic                                 |
| Length                                       | 120cm                                   |
| Length                                       | 1260mm                                  |
| Width                                        | 89mm                                    |
| Height/depth                                 | 70mm                                    |
| Movement sensor/presence detector technology | High frequency                          |
| With movement sensor                         | Yes                                     |
| With presence detector                       | Yes                                     |
| With light sensor                            | Yes                                     |
| Colour of light                              | White                                   |
| Colour temperature                           | 3000 - 4000 - 5700K                     |
| Colour rendering index CRI                   | 80-89                                   |
| Colour of light adjustable                   | Positions                               |
| Luminous flux adjustable                     | Positions                               |
| Beam angle adjustable                        | No                                      |
| Voltage type                                 | AC                                      |
| Nominal voltage                              | 220 - 240V                              |
| Nominal current                              | 166 - 166mA                             |
| Number of poles                              | 4                                       |
| Light distributor                            | Diffuser lens/optic/panel               |
| Connectable conductor cross section          | 1 - 2.5mm??                             |
| Type of control gear                         | LED operating device current-controlled |
| Exchangeable control gear                    | No                                      |

25.08.2026 - Disclaimer: information subject to change.



|                                                |                                 |
|------------------------------------------------|---------------------------------|
| With control gear                              | Yes                             |
| Degree of protection (IP)                      | IP65                            |
| Impact strength                                | IK08                            |
| Rated lifetime L70/B50 at 25 °C                | 102000h                         |
| Max. system power                              | 40W                             |
| Rated luminous flux according to IEC 62722-2-1 | 3250 - 5200lm                   |
| Luminaire efficacy                             | 130lm/W                         |
| Power factor                                   | 0.97                            |
| Type of wiring                                 | Loop-through wiring included    |
| Suitable for emergency lighting                | Yes                             |
| Emergency power supply system                  | Peripheral (individual battery) |
| Emergency function monitoring system           | Automatic self test             |
| Luminous flux in emergency mode                | 300lm                           |
| Power consumption in emergency mode            | 2W                              |
| Warranty                                       | 5 years                         |

25.08.2026 - Disclaimer: information subject to change.

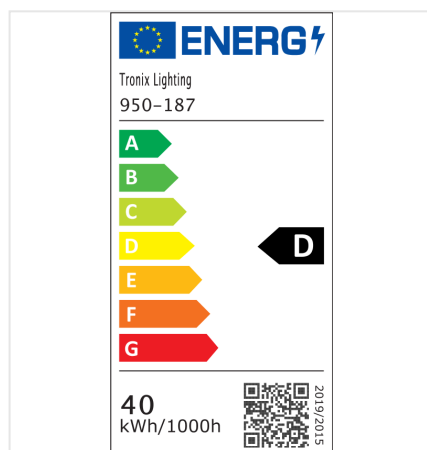

25.08.2026 - Disclaimer: information subject to change.