

Tri-proof lightbar | 1560mm | 60W | 3- CCT | DALI

ARTICLE NUMBER: 950-198

View this
product in
our
webshop



25.08.2026 - Disclaimer: information subject to change.



This 1560 mm tri-proof luminaire with DALI dimming and integrated through wiring delivers Max. system powerful and reliable lighting in demanding environments where durability, light quality and efficient installation come together.

Key product features

- **Length (mm):** 1560
- **Degree of protection (IP):** IP65
- **Dimming DALI:** Yes
- **Type of wiring:** Incl. through wiring
- **Rated luminous flux according to IEC 62722-2-1 (lm):** 7800



Technical specifications:

Product Name	Tri-proof lightbar 1560mm 60W 3-CCT DALI
Ean	8714984954595
Outer box qty	9st
Dimmable	Yes
Connection type	Push-in clamp
Lamp type	LED exchangeable
Housing colour	Grey
Material	Plastic
Length	150cm
Length	1560mm
Width	89mm
Height/depth	70mm
With movement sensor	No
With presence detector	No
With light sensor	No
Colour of light	White

25.08.2026 - Disclaimer: information subject to change.

Colour temperature	3000 - 4000 - 5700K
Colour rendering index CRI	80-89
Colour of light adjustable	Positions
Luminous flux adjustable	Continuously variable
Beam angle adjustable	No
Voltage type	AC
Nominal voltage	220 - 240V
Nominal current	261 - 261mA
Number of poles	4
Light distributor	Diffuser lens/optic/panel
Connectable conductor cross section	1 - 2.5mm??
Type of control gear	LED operating device current-controlled
Exchangeable control gear	No
With control gear	Yes
Degree of protection (IP)	IP65
Impact strength	IK08
Rated lifetime L70/B50 at 25 ??C	102000h
Max. system power	60W
Rated luminous flux according to IEC 62722-2- 1	4550 - 7800lm
Luminaire efficacy	130lm/W
Power factor	0.96
Type of wiring	Loop-through wiring included
Suitable for emergency lighting	No
Emergency power supply system	None
Emergency function monitoring system	None
Warranty	5 years

25.08.2026 - Disclaimer: information subject to change.

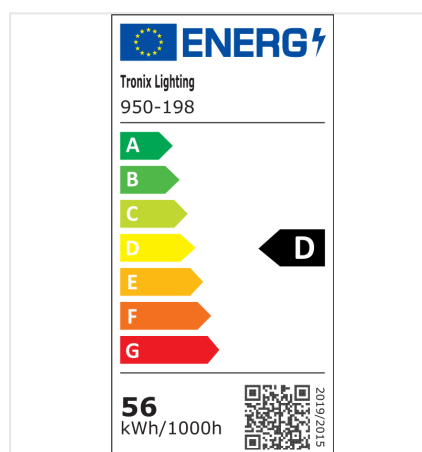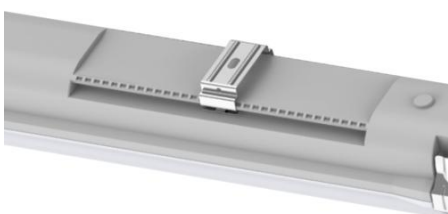

25.08.2026 - Disclaimer: information subject to change.