

Tri-proof lightbar | 1560mm | 60W | 3-CCT | DALI + emergency

ARTICLE NUMBER: 950-199

View this
product in
our
webshop



25.08.2026 - Disclaimer: information subject to change.

This 1560 mm tri-proof luminaire with DALI dimming, integrated emergency lighting and through wiring delivers reliable general and emergency lighting in demanding environments where continuity and easy installation are essential.

Key product features

- **Length (mm):** 1560
- **Degree of protection (IP):** IP65
- **Dimming DALI:** Yes
- **Type of wiring:** Incl. through wiring
- **Rated luminous flux according to IEC 62722-2-1 (lm):** 7800
- **Emergency power supply system:** Decentralised (individual battery)
- **Emergency function monitoring system:** Automatic self-diagnosis

Technical specifications:

Product Name	Tri-proof lightbar 1560mm 60W 3-CCT DALI + emergency
Ean	8714984954601
Outer box qty	9st
Dimmable	Yes
Connection type	Push-in clamp
Lamp type	LED exchangeable
Housing colour	Grey
Material	Plastic
Length	150cm
Length	1560mm
Width	89mm
Height/depth	70mm
With movement sensor	No

25.08.2026 - Disclaimer: information subject to change.

With presence detector	No
With light sensor	No
Colour of light	White
Colour temperature	3000 - 4000 - 5700K
Colour rendering index CRI	80-89
Colour of light adjustable	Positions
Luminous flux adjustable	Continuously variable
Beam angle adjustable	No
Voltage type	AC
Nominal voltage	220 - 240V
Nominal current	261 - 261mA
Number of poles	4
Light distributor	Diffuser lens/optic/panel
Connectable conductor cross section	1 - 2.5mm??
Type of control gear	LED operating device current-controlled
Exchangeable control gear	No
With control gear	Yes
Degree of protection (IP)	IP65
Impact strength	IK08
Rated lifetime L70/B50 at 25 ??C	102000h
Max. system power	60W
Rated luminous flux according to IEC 62722-2- 1	4550 - 7800lm
Luminaire efficacy	130lm/W
Power factor	0.96
Type of wiring	Loop-through wiring included
Suitable for emergency lighting	Yes

25.08.2026 - Disclaimer: information subject to change.



Emergency power supply system	Peripheral (individual battery)
-------------------------------	---------------------------------



Emergency function monitoring system	Automatic self test
--------------------------------------	---------------------

Luminous flux in emergency mode	300lm
---------------------------------	-------

Power consumption in emergency mode	2W
-------------------------------------	----

Warranty	5 years
----------	---------

25.08.2026 - Disclaimer: information subject to change.

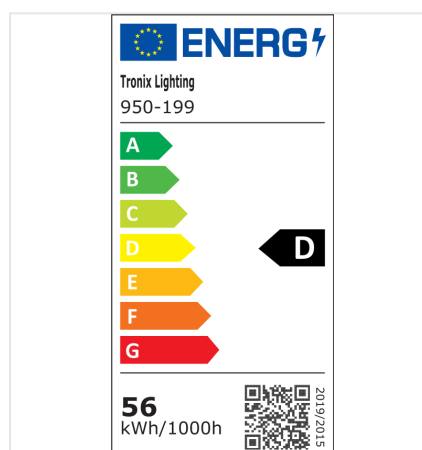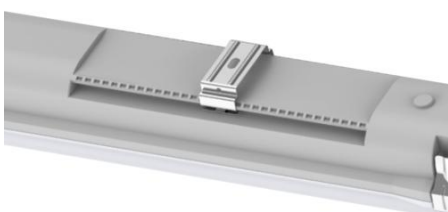

25.08.2026 - Disclaimer: information subject to change.