

Tri-proof lightbar | 1560mm | 60W | 3- CCT | sensor

ARTICLE NUMBER: 950-184

View this
product in
our
webshop



25.08.2026 - Disclaimer: information subject to change.



CARE



SHARE



CONNECT

These Tri-proof light bars are a perfect alternative to traditional fluorescent lamps, thanks in part to its durable and widely applicable design. This light bar is equipped with a high-quality SMD LED chip, ensuring you good and even illumination over a beam angle of 120°. Each product is equipped with waterproof glands, making these light bars come into their own even in damp locations.

Features

- High lumen efficiency with 120Lm/W
- High degree of protection, IP65 and IK08
- Power adjustable by a DIP switch in the wattages 35W, 45W, 55W and 60W
- Light color adjustable by a CCT switch into the color temperatures 3000K, 4000K and 5700K
- Includes microwave sensor with a 140-degree beam angle and a range of 4 to 6 meters
- Can couple up to 1500 watts, thanks in part to internal conduit wiring
- Easy installation as surface mounted
- Flicker-free, internal driver

Technical specifications:

Product Name	Tri-proof lightbar 1560mm 60W 3-CCT sensor
Ean	8714984949591
Outer box qty	9st
Dimmable	No
Connection type	Push-in clamp
Lamp type	LED exchangeable
Housing colour	Grey
Material	Plastic
Length	150cm

25.08.2026 - Disclaimer: information subject to change.

Length	1560mm
Width	89mm
Height/depth	70mm
Movement sensor/presence detector technology	High frequency
With movement sensor	Yes
With presence detector	Yes
With light sensor	Yes
Colour of light	White
Colour temperature	3000 - 4000 - 5700K
Colour rendering index CRI	80-89
Colour of light adjustable	Positions
Luminous flux adjustable	Positions
Beam angle adjustable	No
Voltage type	AC
Nominal voltage	220 - 240V
Nominal current	259 - 259mA
Number of poles	4
Light distributor	Diffuser lens/optic/panel
Connectable conductor cross section	1 - 2.5mm??
Type of control gear	LED operating device current-controlled
Exchangeable control gear	No
With control gear	Yes
Degree of protection (IP)	IP65
Impact strength	IK08
Rated lifetime L70/B50 at 25 ??C	102000h
Max. system power	60W

25.08.2026 - Disclaimer: information subject to change.



Rated luminous flux according to IEC
62722-2- 1 4550 - 7800lm

Luminaire efficacy	130lm/W
--------------------	---------

Power factor	0.96
--------------	------

Type of wiring	Loop-through wiring included
----------------	------------------------------



Suitable for emergency lighting	No
---------------------------------	----

Emergency power supply system	None
-------------------------------	------

Emergency function monitoring system	None
---	------

Warranty	5 years
----------	---------

25.08.2026 - Disclaimer: information subject to change.

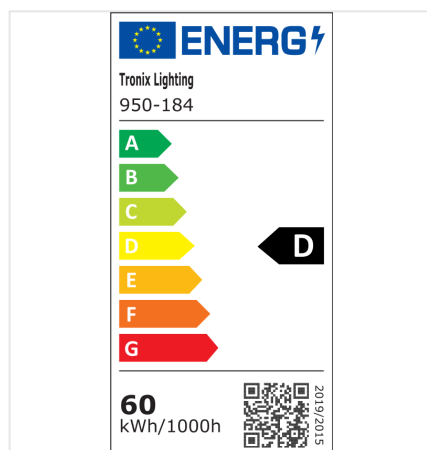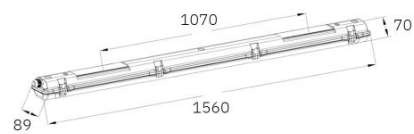

25.08.2026 - Disclaimer: information subject to change.