

Tri-proof lightbar | 1560mm | 60W | 3CCT | emerg.+sensor dim

ARTICLE NUMBER: 950-189

View this
product in
our
webshop



25.08.2026 - Disclaimer: information subject to change.

These Tri-proof light bars are a perfect alternative to traditional fluorescent lamps, thanks in part to its durable and widely applicable design. This light bar is equipped with a high-quality SMD LED chip, ensuring you good and even illumination over a beam angle of 120°. Each product is equipped with waterproof glands, making these light bars come into their own even in damp locations. Equipped with adjustable microwave motion sensor that can dim the fixture when no motion is detected.

Features

- High lumen efficiency with 120Lm/W
- High degree of protection, IP65 and IK08
- Power adjustable by a DIP switch in the wattages 35W, 45W, 55W and 60W
- Light color adjustable by a CCT switch into the color temperatures 3000K, 4000K and 5700K
- Includes dimmable microwave motion sensor with dimming levels up to 10% or 30%, a range of up to 5 meters and a hold time of up to 30 minutes
- Includes emergency functionality to automatically switch to the internal battery when power is not available
- Can couple up to 1500 watts, thanks in part to internal conduit wiring
- Easy installation as surface mounted
- Flicker-free, internal driver

Technical specifications:

Product Name	Tri-proof lightbar 1560mm 60W 3CCT emerg.+sensor dim
Ean	8714984950856
Outer box qty	9st
Dimmable	Yes

25.08.2026 - Disclaimer: information subject to change.



Connection type	Push-in clamp
Lamp type	LED exchangeable
Housing colour	Grey
Material	Plastic
Length	150cm
Length	1560mm
Width	89mm
Height/depth	70mm
Movement sensor/presence detector technology	High frequency
With movement sensor	Yes
With presence detector	Yes
With light sensor	Yes
Colour of light	White
Colour temperature	3000 - 4000 - 5700K
Colour rendering index CRI	80-89
Colour of light adjustable	Positions
Luminous flux adjustable	Positions
Beam angle adjustable	No
Voltage type	AC
Nominal voltage	220 - 240V
Nominal current	259 - 259mA
Number of poles	4
Light distributor	Diffuser lens/optic/panel
Connectable conductor cross section	1 - 2.5mm??
Type of control gear	LED operating device current-controlled
Exchangeable control gear	No

25.08.2026 - Disclaimer: information subject to change.



With control gear	Yes
Degree of protection (IP)	IP65
Impact strength	IK08
Rated lifetime L70/B50 at 25 °C	102000h
Max. system power	60W
Rated luminous flux according to IEC 62722-2-1	4550 - 7800lm
Luminaire efficacy	130lm/W
Power factor	0.96
Type of wiring	Loop-through wiring included
Suitable for emergency lighting	Yes
Emergency power supply system	Peripheral (individual battery)
Emergency function monitoring system	Automatic self test
Luminous flux in emergency mode	300lm
Power consumption in emergency mode	2W
Warranty	5 years

25.08.2026 - Disclaimer: information subject to change.

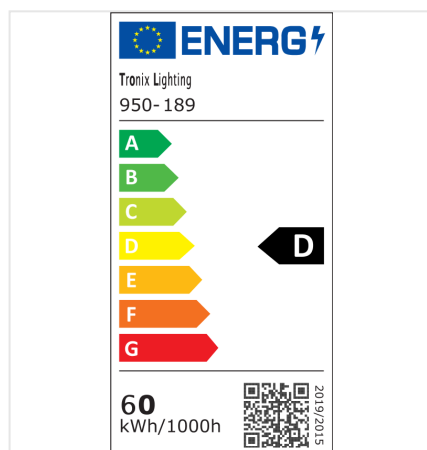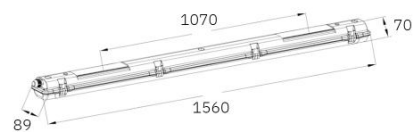

25.08.2026 - Disclaimer: information subject to change.