

Tri-proof lightbar | 1560mm | IP65 | 35/45/55/60W | 3-CCT

ARTICLE NUMBER: 950-088

View this
product in
our
webshop



25.08.2026 - Disclaimer: information subject to change.



This robust tri-proof light bar replaces fluorescent tubes and delivers durable lighting with adjustable Max. system power, customizable light color, high lumen output, through-wiring capability, and an opal diffuser for uniform light distribution.

Key product features:

- **Degree of protection (IP):** IP65
- **Colour temperature (K):** 3000 – 5700
- **Type of wiring:** Loop-through wiring included
- **Max. system power (W):** 60
- **Colour of light adjustable:** Positions
- **Luminous flux adjustable:** Positions
- **Impact strength:** IK08

Technical specifications:

Product Name	Tri-proof lightbar 1560mm IP65 35/45/55/60W 3-CCT
Ean	8714984949140
Outer box qty	6st
Dimmable	No
Connection type	Push-in clamp
Lamp type	LED exchangeable
Housing colour	Grey
Material	Plastic
Length	150cm
Length	1560mm
Width	89mm
Height/depth	70mm
With movement sensor	No
With presence detector	No
With light sensor	No

25.08.2026 - Disclaimer: information subject to change.

Colour of light	White
Colour temperature	3000 - 4000 - 5700K
Colour rendering index CRI	80-89
Colour of light adjustable	Positions
Luminous flux adjustable	Positions
Beam angle adjustable	No
Voltage type	AC
Nominal voltage	231 - 231V
Nominal current	259 - 259mA
Number of poles	4
Light distributor	Diffuser lens/optic/panel
Connectable conductor cross section	1 - 2.5mm??
Type of control gear	LED operating device current-controlled
Exchangeable control gear	No
With control gear	Yes
Degree of protection (IP)	IP65
Impact strength	IK08
Rated lifetime L70/B50 at 25 ??C	102000h
Max. system power	60W
Rated luminous flux according to IEC 62722-2- 1	4550 - 7800lm
Luminaire efficacy	130lm/W
Power factor	0.96
Type of wiring	Loop-through wiring included
Suitable for emergency lighting	No
Emergency power supply system	None
Emergency function monitoring system	None

25.08.2026 - Disclaimer: information subject to change.



Warranty

5 years

25.08.2026 - Disclaimer: information subject to change.






CARE



SHARE



CONNECT

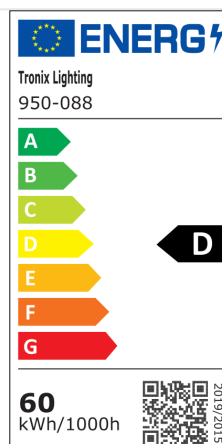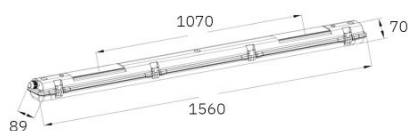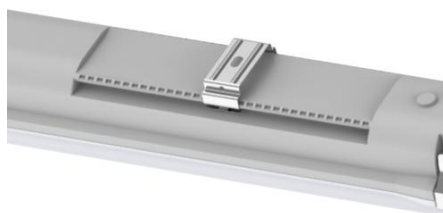

25.08.2026 - Disclaimer: information subject to change.