TRONIX guided by light

UFO | 120/160/200W | 170 Lm/W | 3-CCT | 70/85/115° | Dali

ARTICLE NUMBER: 950-131

View this product in our webshop



15.11.2026 - Disclaimer: information subject to change.

This DALI-2 dimmable UFO highbay offers adjustable colour temperature, power and beam angle. This makes the luminaire suitable for a wide range of professional applications.

Key product features

- **Degree of protection (IP):** IP65
- **Colour temperature (K):** 3000–4000-5000K
- **DALI dimmable:** Yes
- **Max. system power (W):** 200
- **Adjustable light colour:** Settings
- **Adjustable beam angle:** Settings
- **Adjustable luminous flux:** Settings

Technical specifications:


Product Name	UFO | 120/160/200W | 170 Lm/W | 3-CCT | 70/85/115° | Dali
Ean	8714984956872
Outer box qty	1st
Dimmable	Yes
Dimming 0-10 V	No
Lamp type	LED not exchangeable
Housing colour	Black
Housing material	Aluminium
Connection type	Other
Height/depth	161mm
Outer diameter	300mm
With movement sensor	No


With presence detector	No
With light sensor	No
Colour of light	White
Colour consistency (McAdam ellipse)	SDCM6
Colour temperature	3000 - 4000 - 5000K
Colour rendering index CRI	80-89
Colour of light adjustable	Positions
Luminous flux adjustable	Positions
Beam angle	> 80° - Extreme wide beam
Beam angle adjustable	Positions
Voltage type	AC
Nominal current	850 - 850mA
Nominal voltage	220 - 240V
Number of poles	3
Light distributor	Focal lens
Light distribution	Symmetric
Connectable conductor cross section	0.75 - 2.5mm²
Type of control gear	LED operating device current-controlled
Exchangeable control gear	No
With control gear	Yes
Degree of protection (IP)	IP65
Impact strength	IK08
Rated lifetime L70/B50 at 25 °C	276000h
Max. system power	200W
Rated luminous flux according to IEC 62722-2- 1	20280 - 33800lm
Luminaire efficacy	169 - 169lm/W

15.11.2026 - Disclaimer: information subject to change.

Power factor	0.98
Type of wiring	Ending
Suitable for ceiling mounting	Yes
Suitable for suspended mounting	Yes
Reflector	None
Warranty	5 years
Ambient temperature	-30 - 50°C



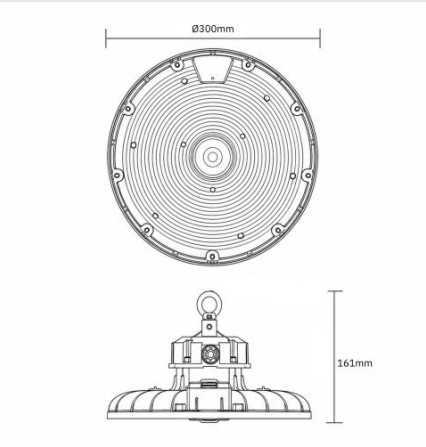

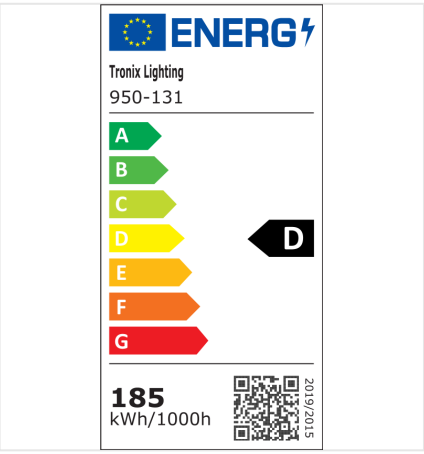

15.11.2026 - Disclaimer: information subject to change.