

UFO high bay || 100 watt | 190 Lm/W | 4000K | 90°

ARTICLE NUMBER: 950-105

View this
product in
our
webshop



14.09.2026 - Disclaimer: information subject to change.



CARE



SHARE



CONNECT

This UFO high bay features an extremely high luminous flux efficiency versus a consumption of 100 watts. Each high bay is equipped with a 90° lens, but can be adjusted using various accessories. As a result, you always have a customized high bay at your disposal, regardless of the intended location.

Features

- Each UFO high bay consists of a base and a 90° lens
- Fresh color temperature with 4000K
- Optionally available: 120 ° reflector (950-113 and 950-114) or 120° lens (950-112)
- Very high luminous efficiency: 190 Lm / W
- High luminous flux (19.000 lumens) ideal for warehouses or other high spaces

Technical specifications:

Product Name	UFO high bay 100 watt 190 Lm/W 4000K 90°
Ean	8714984935365
Outer box qty	1st
Dimmable	No
Dimming 0-10 V	No
Lamp type	LED not exchangeable
Housing colour	Black
Housing material	Aluminium
Connection type	Other
Height/depth	186mm
Outer diameter	360mm
With movement sensor	No
With presence detector	No
With light sensor	No

14.09.2026 - Disclaimer: information subject to change.



Colour of light	White
Colour consistency (McAdam ellipse)	SDCM6
Colour temperature	4000K
Colour rendering index CRI	70-79
Colour of light adjustable	No
Luminous flux adjustable	No
Beam angle	> 80° - Extreme wide beam
Beam angle adjustable	No
Voltage type	AC
Nominal current	417 - 1000mA
Nominal voltage	100 - 240V
Number of poles	3
Light distributor	Focal lens
Light distribution	Symmetric
Connectable conductor cross section	0.75 - 2.5mm ²
Type of control gear	LED operating device current-controlled
Exchangeable control gear	No
With control gear	Yes
Degree of protection (IP)	IP65
Impact strength	IK08
Max. system power	100W
Rated luminous flux according to IEC 62722-2- 1	17000 - 17000lm
Luminaire efficacy	170 - 170lm/W
Power factor	0.93
Type of wiring	Ending
Suitable for ceiling mounting	Yes

14.09.2026 - Disclaimer: information subject to change.



Suitable for suspended mounting	Yes
Reflector	None
Warranty	5 years
Ambient temperature	-30 - 50°C

14.09.2026 - Disclaimer: information subject to change.

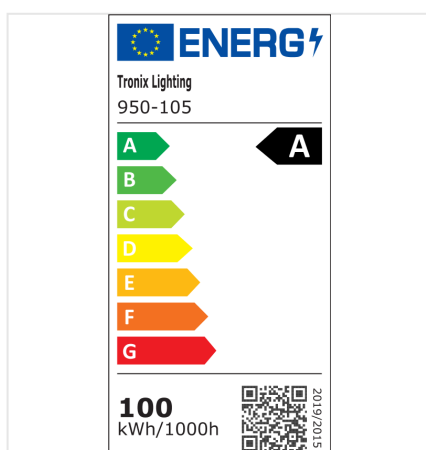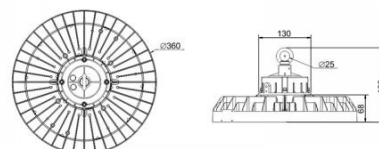

14.09.2026 - Disclaimer: information subject to change.