UFO high bay | 100/120/150W | 150 Lm/W | 3-CCT | 75/95/105°

ARTICLE NUMBER: 950-123

View this product in our webshop



15.11.2026 - Disclaimer: information subject to change.

UFO high bay with selectable colour temperature, wattage, and beam angle. Efficient, durable, and versatile. Ideal for logistics, industrial, and commercial environments.

Key product features

- **Degree of protection (IP):** IP65
- **Colour temperature (K):** 3000 – 4000 – 5000
- **Dimmable 0–10V:** Yes
- **Max. system power (W):** 150
- **Colour of light adjustable:** step-based
- **Beam angle adjustable:** step-based
- **Luminous flux adjustable:** step-based

Technical specifications:


Product Name	UFO high bay | 100/120/150W | 150 Lm/W | 3-CCT | 75/95/105°
Ean	8714984951822
Outer box qty	1st
Dimmable	Yes
Dimming 0-10 V	Yes
Lamp type	LED not exchangeable
Housing colour	Black
Housing material	Aluminium
Connection type	Other
Length	280mm
Width	280mm
Height/depth	175mm
Outer diameter	280mm
With movement sensor	No
With presence detector	No

15.11.2026 - Disclaimer: information subject to change.


With light sensor	No
Colour of light	White
Colour consistency (McAdam ellipse)	SDCM3
Colour temperature	3000 - 4000 - 5000K
Colour rendering index CRI	80-89
Colour of light adjustable	Positions
Luminous flux adjustable	Positions
Beam angle	41-80° - Wide beam
Beam angle adjustable	Positions
Voltage type	AC
Nominal current	625 - 625mA
Nominal voltage	231 - 231V
Number of poles	3
Light distributor	Focal lens
Light distribution	Symmetric
Connectable conductor cross section	0.75 - 2.5mm²
Type of control gear	LED operating device current-controlled
Exchangeable control gear	No
With control gear	Yes
Degree of protection (IP)	IP65
Impact strength	IK08
Rated lifetime L70/B50 at 25 °C	50000h
Max. system power	150W
Rated luminous flux according to IEC 62722-2- 1	14500 - 21750lm
Luminaire efficacy	145 - 145lm/W
Power factor	0.97


15.11.2026 - Disclaimer: information subject to change.


Type of wiring	Ending
Suitable for ceiling mounting	Yes
Suitable for suspended mounting	Yes
Reflector	None
Warranty	5 years
Ambient temperature	-35 - 50°C





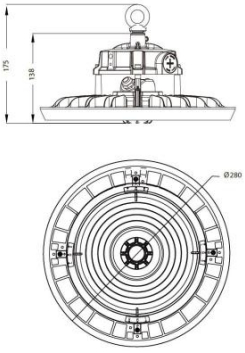

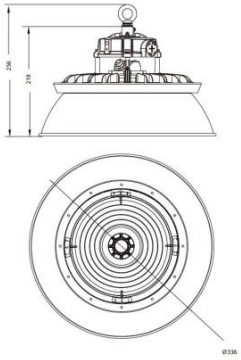

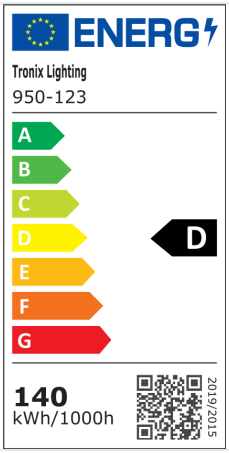

15.11.2026 - Disclaimer: information subject to change.