

UFO high bay | 100/120/150W | 150 Lm/W |
3-CCT | 75/95/105°

ARTICLE NUMBER: 950-123

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.



CARE



SHARE



CONNECT



UFO high bay with selectable colour temperature, wattage, and beam angle. Efficient, durable, and versatile. Ideal for logistics, industrial, and commercial environments.

Key product features

- **Degree of protection (IP):** IP65
- **Colour temperature (K):** 3000 – 4000 – 5000
- **Dimmable 0–10V:** Yes
- **Max. system power (W):** 150
- **Colour of light adjustable:** step-based
- **Beam angle adjustable:** step-based
- **Luminous flux adjustable:** step-based

Technical specifications:

Product Name	UFO high bay 100/120/150W 150 Lm/W 3-CCT 75/95/105°
Ean	8714984951822
Outer box qty	1st
Dimmable	Yes
Dimming 0-10 V	Yes
Lamp type	LED not exchangeable
Housing colour	Black
Housing material	Aluminium
Connection type	Other
Length	280mm
Width	280mm
Height/depth	175mm
Outer diameter	280mm
With movement sensor	No
With presence detector	No

24.08.2026 - Disclaimer: information subject to change.







With light sensor	No
Colour of light	White
Colour consistency (McAdam ellipse)	SDCM3
Colour temperature	3000 - 4000 - 5000K
Colour rendering index CRI	80-89
Colour of light adjustable	Positions
Luminous flux adjustable	Positions
Beam angle	41-80° - Wide beam
Beam angle adjustable	Positions
Voltage type	AC
Nominal current	625 - 625mA
Nominal voltage	231 - 231V
Number of poles	3
Light distributor	Focal lens
Light distribution	Symmetric
Connectable conductor cross section	0.75 - 2.5mm ²
Type of control gear	LED operating device current-controlled
Exchangeable control gear	No
With control gear	Yes
Degree of protection (IP)	IP65
Impact strength	IK08
Rated lifetime L70/B50 at 25 °C	50000h
Max. system power	150W
Rated luminous flux according to IEC 62722-2- 1	14500 - 21750lm
Luminaire efficacy	145 - 145lm/W
Power factor	0.97

24.08.2026 - Disclaimer: information subject to change.



Type of wiring	Ending
Suitable for ceiling mounting	Yes
Suitable for suspended mounting	Yes
Reflector	None
Warranty	5 years
Ambient temperature	-35 - 50°C

24.08.2026 - Disclaimer: information subject to change.

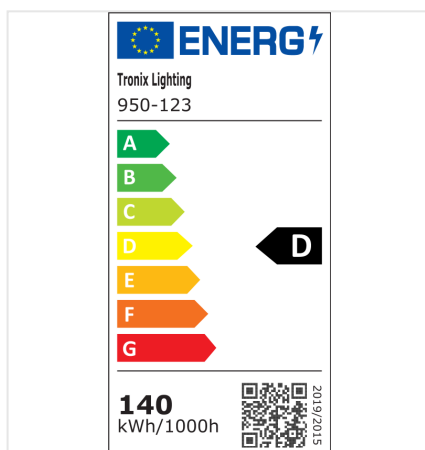

24.08.2026 - Disclaimer: information subject to change.