

UFO high bay ||150 watt | 140 Lm/W | 5000K |
power/beam adj.

ARTICLE NUMBER: 950-120

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.



This versatile UFO high bay is characterized by the fact that you can adjust it to your needs. This fixture offers the possibility to switch between four different wattages (80W, 100W, 120W or 150W) and a variable beam angle (60°, 80° or 100°). Ideal for businesses, stores and more.

Features

- >140 Lm/W High light efficiency
- DIP switch for setting: 80W, 100W, 120W, 150W
- Adjustable beam angle by simply rotating the lens: 60°, 80°, 100°
- 50.000 hours, 5 year warranty

Technical specifications:

Product Name	UFO high bay 150 watt 140 Lm/W 5000K power/beam adj.
Ean	8714984936942
Outer box qty	1st
Dimmable	No
Dimming 0-10 V	No
Lamp type	LED not exchangeable
Housing colour	Black
Housing material	Aluminium
Connection type	Other
Height/depth	167mm
Outer diameter	320mm
With movement sensor	No
With presence detector	No
With light sensor	No
Colour of light	White
Colour consistency (McAdam ellipse)	SDCM6
Colour temperature	5000K

24.08.2026 - Disclaimer: information subject to change.

Colour rendering index CRI	70-79
Colour of light adjustable	Positions
Luminous flux adjustable	Positions
Beam angle	> 80° - Extreme wide beam
Beam angle adjustable	Positions
Voltage type	AC
Nominal current	625 - 682mA
Nominal voltage	220 - 240V
Number of poles	3
Light distributor	Focal lens
Light distribution	Symmetric
Connectable conductor cross section	0.75 - 2.5mm ²
Type of control gear	LED operating device current-controlled
Exchangeable control gear	No
With control gear	Yes
Degree of protection (IP)	IP42
Impact strength	IK07
Rated lifetime L70/B50 at 25 °C	50000h
Max. system power	150W
Rated luminous flux according to IEC 62722-2- 1	11200 - 21000lm
Luminaire efficacy	140 - 140lm/W
Power factor	0.92
Type of wiring	Ending
Suitable for ceiling mounting	Yes
Suitable for suspended mounting	Yes
Reflector	None

24.08.2026 - Disclaimer: information subject to change.



Warranty

5 years

Ambient temperature

-30 - 50°C

24.08.2026 - Disclaimer: information subject to change.






CARE



SHARE



CONNECT

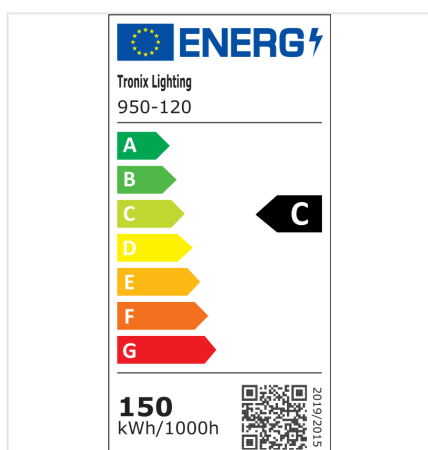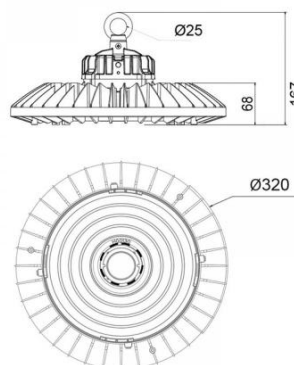

24.08.2026 - Disclaimer: information subject to change.