Vestibule bulkhead || rectangular 6,4 watt | 4000K | IP65

ARTICLE NUMBER: 136-024

View this product in our webshop



14.11.2026 - Disclaimer: information subject to change.

This ceiling fixture is suitable for installation in various spaces such as offices, residential spaces, schools, hotels and other public spaces.

Features

- High quality internal driver with optimum heat regulation
- Can be directly connected by using the terminal block on the fixture
- Pleasant, effective color temperature of 4000K
- Long service life of 30.000 hours
- IP65 for installation in moist areas

Technical specifications:

Product Name	Vestibule bulkhead || rectangular 6,4 watt | 4000K | IP65
Ean	8714984914780
Outer box qty	12st
Lamp type	LED not exchangeable
Housing material	Plastic
Housing colour	White
Material cover	Plastic, opal
Suitable for emergency lighting	No
Nominal current	27 - 29mA
Voltage type	AC
Type of control gear	LED operating device current-controlled
With control gear	Yes
Constant light output (CLO)	No
Type of grid	Matt
Nominal voltage	220 - 240V
Length	345mm
Width	107mm
Height/depth	75mm

14.11.2026 - Disclaimer: information subject to change.


Colour of light	White
Colour rendering index CRI	70-79
Exchangeable control gear	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming phase cut-off (trailing edge)	No
With movement sensor	No
With presence detector	No
Impact strength	IK08
With light sensor	No
Suitable for surface mounting	Yes
Suitable for built-in mounting	No
Light distribution	Symmetric
Beam angle	> 80° - Extreme wide beam
Light outlet	Direct
Dimming RF	No
Dimming Zigbee	No
Light distributor	Other
Surface protection housing	Lacquered
Colour consistency (McAdam ellipse)	SDCM6
Rated lifetime L70/B50 at 25 °C	30000h
Colour of light adjustable	No
Luminous flux adjustable	No
Max. system power	6.4W
Beam angle adjustable	No
Power factor	0.39

14.11.2026 - Disclaimer: information subject to change.

Type of wiring	Ending
Number of poles	3
Compatible with Casambi	No
Luminaire efficacy	50 - 50lm/W
Dimmable	No
Rated luminous flux according to IEC 62722-2- 1	320 - 320lm
Emergency power supply system	None
Suitable for ceiling mounting	Yes
Connectable conductor cross section	0.75 - 0.75mm²
Suitable for wall mounting	Yes
Suitable for suspended mounting	No
Suitable for workplace according to EN 12464-1	No
Degree of protection (IP), front side	IP65
With mounting material	Yes
Colour temperature	4000K
With connection cord and plug	No
Warranty	2 years
Ambient temperature	-20 - 40°C

14.11.2026 - Disclaimer: information subject to change.



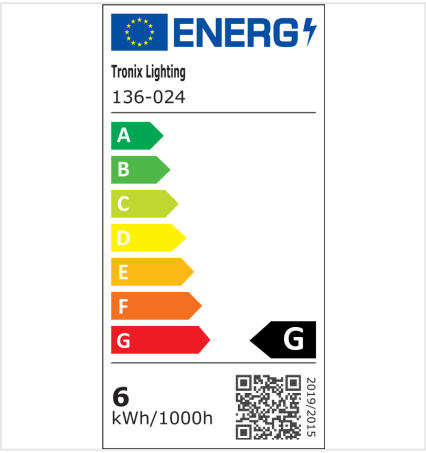

14.11.2026 - Disclaimer: information subject to change.