

Vestibule bulkhead || rectangular 6,4 watt | 4000K | IP65

ARTICLE NUMBER: 136-024

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.



This ceiling fixture is suitable for installation in various spaces such as offices, residential spaces, schools, hotels and other public spaces.

Features

- High quality internal driver with optimum heat regulation
- Can be directly connected by using the terminal block on the fixture
- Pleasant, effective color temperature of 4000K
- Long service life of 30.000 hours
- IP65 for installation in moist areas

Technical specifications:

Product Name	Vestibule bulkhead rectangular 6,4 watt 4000K IP65
Ean	8714984914780
Outer box qty	12st
Lamp type	LED not exchangeable
Housing material	Plastic
Housing colour	White
Material cover	Plastic, opal
Suitable for emergency lighting	No
Nominal current	27 - 29mA
Voltage type	AC
Type of control gear	LED operating device current-controlled
With control gear	Yes
Constant light output (CLO)	No
Type of grid	Matt
Nominal voltage	220 - 240V
Length	345mm
Width	107mm
Height/depth	75mm


24.08.2026 - Disclaimer: information subject to change.

Colour of light	White
Colour rendering index CRI	70-79
Exchangeable control gear	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming phase cut-off (trailing edge)	No
With movement sensor	No
With presence detector	No
Impact strength	IK08
With light sensor	No
Suitable for surface mounting	Yes
Suitable for built-in mounting	No
Light distribution	Symmetric
Beam angle	> 80° - Extreme wide beam
Light outlet	Direct
Dimming RF	No
Dimming Zigbee	No
Light distributor	Other
Surface protection housing	Lacquered
Colour consistency (McAdam ellipse)	SDCM6
Rated lifetime L70/B50 at 25 °C	30000h
Colour of light adjustable	No
Luminous flux adjustable	No
Max. system power	6.4W
Beam angle adjustable	No
Power factor	0.39

24.08.2026 - Disclaimer: information subject to change.

Type of wiring	Ending
Number of poles	3
Compatible with Casambi	No
Luminaire efficacy	50 - 50lm/W
Dimmable	No
Rated luminous flux according to IEC 62722-2- 1	320 - 320lm
Emergency power supply system	None
Suitable for ceiling mounting	Yes
Connectable conductor cross section	0.75 - 0.75mm ²
Suitable for wall mounting	Yes
Suitable for suspended mounting	No
Suitable for workplace according to EN 12464-1	No
Unified Glare Ratio (UGR)	25
Degree of protection (IP), front side	IP65
With mounting material	Yes
Colour temperature	4000K
With connection cord and plug	No
Warranty	2 years
Ambient temperature	-20 - 40°C

24.08.2026 - Disclaimer: information subject to change.

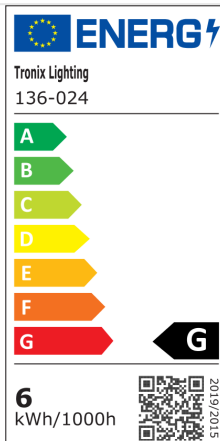

24.08.2026 - Disclaimer: information subject to change.