

Wall lamp | 136x115x100mm | black |  
6W | 3000K | dim

ARTICLE NUMBER: 149-146

View this  
product in  
our  
webshop



24.08.2026 - Disclaimer: information subject to change.



This dimmable wall light features a sleek, functional design. The adjustable flaps on both sides can be set up to 120°. The robust aluminum housing with powder coating ensures durability and resistance to various weather conditions.

## Key product features:

- **Colour temperature (K):** 3000
- **Housing material:** Aluminium
- **Housing colour:** Black
- **Max. system power (W):** 6
- **Beam angle adjustable:** Continuously variable
- **Dimmable:** Yes
- **Degree of protection (IP):** IP65

## Technical specifications:

|                                 |                                                      |
|---------------------------------|------------------------------------------------------|
| Product Name                    | Wall lamp   136x115x100mm   black   6W   3000K   dim |
| Ean                             | 8714984936805                                        |
| Outer box qty                   | 20st                                                 |
| Lamp type                       | LED not exchangeable                                 |
| Housing material                | Aluminium                                            |
| Housing colour                  | Black                                                |
| Material cover                  | Other                                                |
| Suitable for emergency lighting | No                                                   |
| Nominal current                 | 26 - 26mA                                            |
| Voltage type                    | AC                                                   |
| Type of control gear            | LED operating device current-controlled              |
| With control gear               | Yes                                                  |
| Constant light output (CLO)     | No                                                   |
| Type of grid                    | None                                                 |
| Nominal voltage                 | 220 - 240V                                           |



24.08.2026 - Disclaimer: information subject to change.

|                                       |                       |
|---------------------------------------|-----------------------|
| Length                                | 136mm                 |
| Width                                 | 115mm                 |
| Height/depth                          | 100mm                 |
| Colour of light                       | White                 |
| Colour rendering index CRI            | 80-89                 |
| Exchangeable control gear             | No                    |
| Dimming 0-10 V                        | No                    |
| Dimming 1-10 V                        | No                    |
| Dimming DALI                          | No                    |
| Dimming phase cut-off (trailing edge) | Yes                   |
| With movement sensor                  | No                    |
| With presence detector                | No                    |
| Impact strength                       | IK06                  |
| With light sensor                     | No                    |
| Suitable for surface mounting         | Yes                   |
| Suitable for built-in mounting        | No                    |
| Light distribution                    | Symmetric/asymmetric  |
| Beam angle                            | Variable beam angle   |
| Light outlet                          | Direct/indirect       |
| Dimming RF                            | No                    |
| Dimming Zigbee                        | No                    |
| Light distributor                     | Other                 |
| Surface protection housing            | Powder coating        |
| Colour consistency (McAdam ellipse)   | SDCM3                 |
| Rated lifetime L70/B50 at 25 °C       | 50000h                |
| Colour of light adjustable            | No                    |
| Luminous flux adjustable              | Continuously variable |

24.08.2026 - Disclaimer: information subject to change.

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Max. system power                               | 6W                    |
| Beam angle adjustable                           | Continuously variable |
| Power factor                                    | 0.91                  |
| Type of wiring                                  | Ending                |
| Number of poles                                 | 3                     |
| Compatible with Casambi                         | No                    |
| Luminaire efficacy                              | 40 - 40lm/W           |
| Dimmable                                        | Yes                   |
| Rated luminous flux according to IEC 62722-2- 1 | 240 - 240lm           |
| Emergency power supply system                   | None                  |
| Suitable for ceiling mounting                   | No                    |
| Connectable conductor cross section             | 0.75 - 0.75mm??       |
| Suitable for wall mounting                      | Yes                   |
| Suitable for suspended mounting                 | No                    |
| Suitable for workplace according to EN 12464-1  | No                    |
| Unified Glare Ratio (UGR)                       | 10.4                  |
| Degree of protection (IP), front side           | IP65                  |
| With mounting material                          | Yes                   |
| Colour temperature                              | 3000K                 |
| With connection cord and plug                   | No                    |
| Warranty                                        | 5 years               |
| Ambient temperature                             | -20 - 45??C           |

24.08.2026 - Disclaimer: information subject to change.

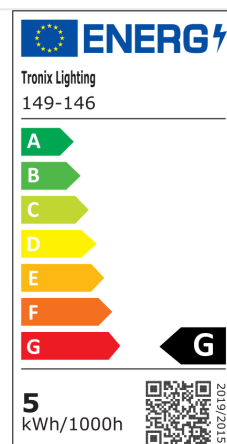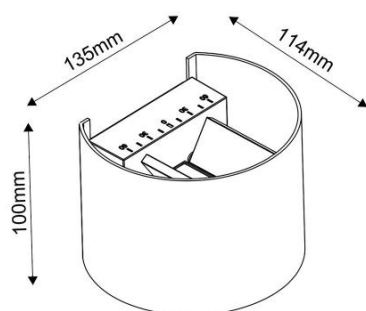

24.08.2026 - Disclaimer: information subject to change.