TRONIX guided by light

# Wall lamp || 200x101x100 | black | 20W | 2700K | dim

ARTICLE NUMBER: 149-244

View this product in our webshop



06.11.2026 - Disclaimer: information subject to change.

This dimmable wall light features a sleek, functional design. The adjustable flaps on both sides can be set up to 120°. The robust aluminum housing with powder coating ensures durability and resistance to various weather conditions.

**Key product features:**

- **Colour temperature (K):** 2700
- **Housing material:** Aluminium
- **Housing colour:** Black
- **Max. system power (W):** 20
- **Beam angle adjustable:** Continuously variable
- **Dimmable:** Yes
- **Degree of protection (IP):** IP65

**Technical specifications:**

| | |
|---|---|
| Product Name | Wall lamp \|\| 200x101x100 \| black \| 20W \| 2700K \| dim |
| Ean | 8714984939264 |
| Outer box qty | 10st |
| Lamp type | LED not exchangeable |
| Housing material | Aluminium |
| Housing colour | Black |
| Material cover | Other |
| Suitable for emergency lighting | No |
| Nominal current | 95 - 95mA |
| Voltage type | AC |
| Type of control gear | LED operating device current-controlled |
| With control gear | Yes |
| Constant light output (CLO) | No |
| Type of grid | None |
| Nominal voltage | 220 - 240V |

06.11.2026 - Disclaimer: information subject to change.

| | |
|---|---|
| Length | 101mm |
| Width | 200mm |
| Height/depth | 100mm |
| Colour of light | White |
| Colour rendering index CRI | 90-100 |
| Exchangeable control gear | No |
| Dimming 0-10 V | No |
| Dimming 1-10 V | No |
| Dimming DALI | No |
| Dimming phase cut-off (trailing edge) | Yes |
| With movement sensor | No |
| With presence detector | No |
| Impact strength | IK06 |
| With light sensor | No |
| Suitable for surface mounting | Yes |
| Suitable for built-in mounting | No |
| Light distribution | Symmetric/asymmetric |
| Beam angle | Variable beam angle |
| Light outlet | Direct/indirect |
| Dimming RF | No |
| Dimming Zigbee | No |
| Light distributor | Other |
| Surface protection housing | Powder coating |
| Colour consistency (McAdam ellipse) | SDCM3 |
| Rated lifetime L70/B50 at 25 ??C | 50000h |
| Colour of light adjustable | No |
| Luminous flux adjustable | Continuously variable |

06.11.2026 - Disclaimer: information subject to change.

| | |
|---|---|
| Max. system power | 20W |
| Beam angle adjustable | Continuously variable |
| Power factor | 0.97 |
| Type of wiring | Ending |
| Number of poles | 3 |
| Compatible with Casambi | No |
| Luminaire efficacy | 60 - 60lm/W |
| Dimmable | Yes |
| Rated luminous flux according to IEC 62722-2- 1 | 1200 - 1200lm |
| Emergency power supply system | None |
| Suitable for ceiling mounting | No |
| Connectable conductor cross section | 0.75 - 0.75mm?? |
| Suitable for wall mounting | Yes |
| Suitable for suspended mounting | No |
| Suitable for workplace according to EN 12464-1 | No |
| Degree of protection (IP), front side | IP65 |
| With mounting material | Yes |
| Colour temperature | 2700K |
| With connection cord and plug | No |
| Warranty | 5 years |
| Ambient temperature | -20 - 45??C |


06.11.2026 - Disclaimer: information subject to change.










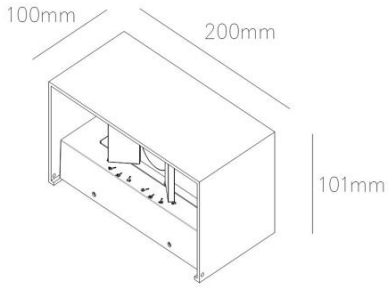

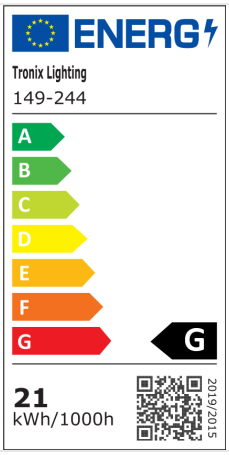
06.11.2026 - Disclaimer: information subject to change.