Wall lamp | black | 5,7W | 2700K | IP65 | dim

ARTICLE NUMBER: 149-170

View this product in our webshop



06.11.2026 - Disclaimer: information subject to change.

This 143 mm high wall light has a Pyramid-like shape and is suitable for both indoor and outdoor use. The beam (38°) shines downward and is ideal for illuminating a wall, wall or garden fence.

Features

- IP65
- 143 mm high
- 640 Lm
- Incl. internal driver, trailing edge dimmable

Technical specifications:

Product Name	Wall lamp | black | 5,7W | 2700K | IP65 | dim
Ean	8714984941113
Outer box qty	20st
Lamp type	LED not exchangeable
Housing material	Aluminium
Housing colour	Black
Material cover	Other
Suitable for emergency lighting	No
Nominal current	29 - 29mA
Voltage type	AC
Type of control gear	LED operating device current-controlled
With control gear	Yes
Constant light output (CLO)	No
Type of grid	None
Nominal voltage	220 - 240V
Length	90mm
Width	90mm
Height/depth	143mm

Colour of light	White
Colour rendering index CRI	80-89
Exchangeable control gear	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming phase cut-off (trailing edge)	Yes
With movement sensor	No
With presence detector	No
Impact strength	IK06
With light sensor	No
Suitable for surface mounting	Yes
Suitable for built-in mounting	No
Light distribution	Symmetric/asymmetric
Beam angle	21-40° - Medium beam
Light outlet	Direct
Dimming RF	No
Dimming Zigbee	No
Light distributor	Other
Surface protection housing	Powder coating
Colour consistency (McAdam ellipse)	SDCM3
Rated lifetime L70/B50 at 25 °C	50000h
Colour of light adjustable	No
Luminous flux adjustable	Continuously variable
Max. system power	5.8W
Beam angle adjustable	No
Power factor	0.95

06.11.2026 - Disclaimer: information subject to change.


Type of wiring	Ending
Number of poles	3
Compatible with Casambi	No
Luminaire efficacy	75 - 75lm/W
Dimmable	Yes
Rated luminous flux according to IEC 62722-2- 1	428 - 428lm
Emergency power supply system	None
Suitable for ceiling mounting	No
Connectable conductor cross section	0.75 - 0.75mm²
Suitable for wall mounting	Yes
Suitable for suspended mounting	No
Suitable for workplace according to EN 12464-1	No
Degree of protection (IP), front side	IP65
With mounting material	Yes
Colour temperature	2700K
With connection cord and plug	No
Warranty	5 years
Ambient temperature	-20 - 50°C










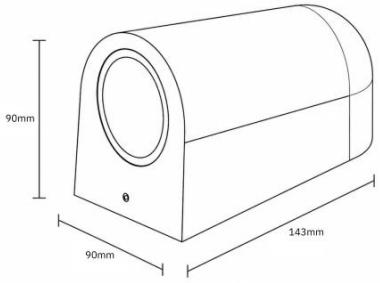

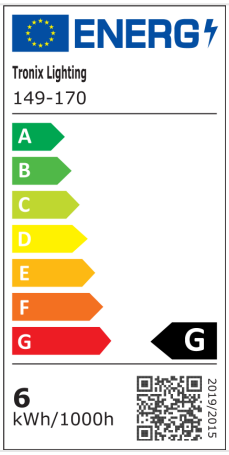

06.11.2026 - Disclaimer: information subject to change.