

Wall lamp || cube 10x10x10cm | RAL7016 |
6W | 2300K | dim

ARTICLE NUMBER: 149-134

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.



This dimmable wall light features a sleek, functional design. The adjustable flaps on both sides can be set up to 120°. The robust aluminum housing with powder coating ensures durability and resistance to various weather conditions.

Key product features:

- **Colour temperature (K):** 2300
- **Housing material:** Aluminium
- **Housing colour:** Anthracite
- **Max. system power (W):** 6
- **Beam angle adjustable:** Continuously variable
- **Dimmable:** Yes
- **Degree of protection (IP):** IP65

Technical specifications:

Product Name	Wall lamp cube 10x10x10cm RAL7016 6W 2300K dim
Ean	8714984938014
Outer box qty	20st
Lamp type	LED not exchangeable
Housing material	Aluminium
Housing colour	Anthracite
Material cover	Other
Suitable for emergency lighting	No
Nominal current	26 - 26mA
Voltage type	AC
Type of control gear	LED operating device current-controlled
With control gear	Yes
Constant light output (CLO)	No
Type of grid	None
Nominal voltage	220 - 240V




24.08.2026 - Disclaimer: information subject to change.

Length	100mm
Width	100mm
Height/depth	101mm
Colour of light	White
Colour rendering index CRI	80-89
Exchangeable control gear	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming phase cut-off (trailing edge)	Yes
With movement sensor	No
With presence detector	No
Impact strength	IK06
With light sensor	No
Suitable for surface mounting	Yes
Suitable for built-in mounting	No
Light distribution	Symmetric/asymmetric
Beam angle	Variable beam angle
Light outlet	Direct/indirect
Dimming RF	No
Dimming Zigbee	No
Light distributor	Other
Surface protection housing	Powder coating
Colour consistency (McAdam ellipse)	SDCM3
Rated lifetime L70/B50 at 25 °C	50000h
Colour of light adjustable	No
Luminous flux adjustable	Continuously variable

24.08.2026 - Disclaimer: information subject to change.

Max. system power	6W
Beam angle adjustable	Continuously variable
Power factor	0.91
Type of wiring	Ending
Number of poles	3
Compatible with Casambi	No
Luminaire efficacy	40 - 40lm/W
Dimmable	Yes
Rated luminous flux according to IEC 62722-2- 1	240 - 240lm
Emergency power supply system	None
Suitable for ceiling mounting	No
Connectable conductor cross section	0.75 - 0.75mm??
Suitable for wall mounting	Yes
Suitable for suspended mounting	No
Suitable for workplace according to EN 12464-1	No
Unified Glare Ratio (UGR)	11.5
Degree of protection (IP), front side	IP65
With mounting material	Yes
Colour temperature	2300K
With connection cord and plug	No
Warranty	5 years
Ambient temperature	-20 - 45??C

24.08.2026 - Disclaimer: information subject to change.

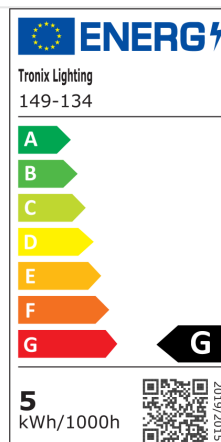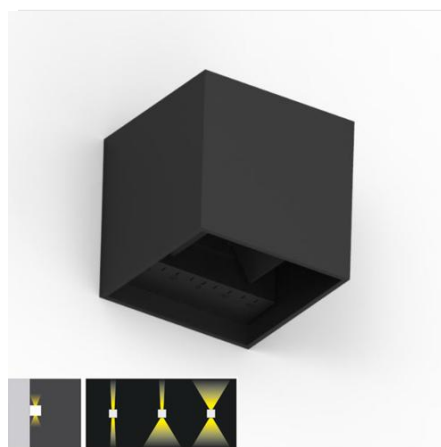

24.08.2026 - Disclaimer: information subject to change.