Wall lamp | cube 10x10x10cm | RAL7016 | 6W | 2700K | dim

ARTICLE NUMBER: 149-133

View this product in our webshop



15.11.2026 - Disclaimer: information subject to change.

This dimmable wall light features a sleek, functional design. The adjustable flaps on both sides can be set up to 120°. The robust aluminum housing with powder coating ensures durability and resistance to various weather conditions.

Key product features:

- **Colour temperature (K):** 2700
- **Housing material:** Aluminium
- **Housing colour:** Anthracite
- **Max. system power (W):** 6
- **Beam angle adjustable:** Continuously variable
- **Dimmable:** Yes
- **Degree of protection (IP):** IP65

Technical specifications:

Product Name	Wall lamp | cube 10x10x10cm | RAL7016 | 6W | 2700K | dim
Ean	8714984938007
Outer box qty	20st
Lamp type	LED not exchangeable
Housing material	Aluminium
Housing colour	Anthracite
Material cover	Other
Suitable for emergency lighting	No
Nominal current	29 - 29mA
Voltage type	AC
Type of control gear	LED operating device current-controlled
With control gear	Yes
Constant light output (CLO)	No
Type of grid	None
Nominal voltage	220 - 240V

15.11.2026 - Disclaimer: information subject to change.

Length	100mm
Width	100mm
Height/depth	101mm
Colour of light	White
Colour rendering index CRI	80-89
Exchangeable control gear	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming phase cut-off (trailing edge)	Yes
With movement sensor	No
With presence detector	No
Impact strength	IK06
With light sensor	No
Suitable for surface mounting	Yes
Suitable for built-in mounting	No
Light distribution	Symmetric/asymmetric
Beam angle	Variable beam angle
Light outlet	Direct/indirect
Dimming RF	No
Dimming Zigbee	No
Light distributor	Other
Surface protection housing	Powder coating
Colour consistency (McAdam ellipse)	SDCM3
Rated lifetime L70/B50 at 25 ??C	50000h
Colour of light adjustable	No
Luminous flux adjustable	Continuously variable

15.11.2026 - Disclaimer: information subject to change.

Max. system power	6W
Beam angle adjustable	Continuously variable
Power factor	0.95
Type of wiring	Ending
Number of poles	3
Compatible with Casambi	No
Luminaire efficacy	40 - 40lm/W
Dimmable	Yes
Rated luminous flux according to IEC 62722-2- 1	240 - 240lm
Emergency power supply system	None
Suitable for ceiling mounting	No
Connectable conductor cross section	0.75 - 0.75mm??
Suitable for wall mounting	Yes
Suitable for suspended mounting	No
Suitable for workplace according to EN 12464-1	No
Degree of protection (IP), front side	IP65
With mounting material	Yes
Colour temperature	2700K
With connection cord and plug	No
Warranty	5 years
Ambient temperature	-20 - 45??C


15.11.2026 - Disclaimer: information subject to change.












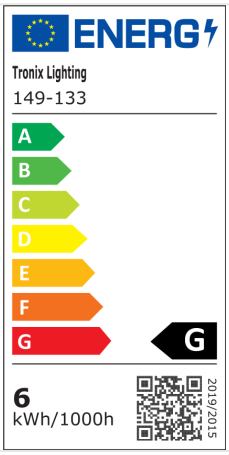

15.11.2026 - Disclaimer: information subject to change.