TRONIX guided by light

# Wall lamp | up & down 115x90mm | black | 7W | 2700K | dim

ARTICLE NUMBER: 149-150

View this product in our webshop



07.11.2026 - Disclaimer: information subject to change.

This ultra-slim 28 mm wall light combines style and functionality. The 2700K warm white up-and-down light creates an inviting ambiance in commercial and hospitality settings.

**Key product features:**

- **Colour temperature (K):** 2700
- **Housing colour:** Black
- **Material cover:** Glass transparent
- **Length (mm):** 115
- **Max. system power (W):** 7
- **Dimmable:** Yes
- **Degree of protection (IP):** IP54

**Technical specifications:**


| | |
|---|---|
| Product Name | Wall lamp \| up & down 115x90mm \| black \| 7W \| 2700K \| dim |
| Ean | 8714984932951 |
| Outer box qty | 40st |
| Lamp type | LED not exchangeable |
| Housing material | Aluminium |
| Housing colour | Black |
| Material cover | Glass transparent |
| Suitable for emergency lighting | No |
| Nominal current | 27 - 27mA |
| Voltage type | AC |
| Type of control gear | LED operating device current-controlled |
| With control gear | Yes |
| Constant light output (CLO) | No |
| Type of grid | None |
| Nominal voltage | 220 - 240V |

| | |
|---|---|
| Length | 115mm |
| Width | 28mm |
| Height/depth | 90mm |
| Colour of light | White |
| Colour rendering index CRI | 80-89 |
| Exchangeable control gear | No |
| Dimming 0-10 V | No |
| Dimming 1-10 V | No |
| Dimming DALI | No |
| Dimming phase cut-off (trailing edge) | Yes |
| With movement sensor | No |
| With presence detector | No |
| Impact strength | IK06 |
| With light sensor | No |
| Suitable for surface mounting | Yes |
| Suitable for built-in mounting | No |
| Light distribution | Symmetric |
| Beam angle | > 80° - Extreme wide beam |
| Light outlet | Direct |
| Dimming RF | No |
| Dimming Zigbee | No |
| Light distributor | None |
| Surface protection housing | Powder coating |
| Colour consistency (McAdam ellipse) | SDCM3 |
| Rated lifetime L70/B50 at 25 °C | 50000h |
| Colour of light adjustable | No |
| Luminous flux adjustable | Continuously variable |

07.11.2026 - Disclaimer: information subject to change.

| | |
|---|---|
| Max. system power | 7W |
| Beam angle adjustable | No |
| Power factor | 0.94 |
| Type of wiring | Ending |
| Number of poles | 3 |
| Compatible with Casambi | No |
| Luminaire efficacy | 90 - 90lm/W |
| Dimmable | Yes |
| Rated luminous flux according to IEC 62722-2- 1 | 630 - 630lm |
| Emergency power supply system | None |
| Suitable for ceiling mounting | No |
| Connectable conductor cross section | 0.75 - 0.75mm² |
| Suitable for wall mounting | Yes |
| Suitable for suspended mounting | No |
| Suitable for workplace according to EN 12464-1 | No |
| Degree of protection (IP), rear side | IP20 |
| Degree of protection (IP), front side | IP54 |
| With mounting material | Yes |
| Colour temperature | 2700K |
| With connection cord and plug | No |
| Warranty | 5 years |
| Ambient temperature | -20 - 45°C |


07.11.2026 - Disclaimer: information subject to change.










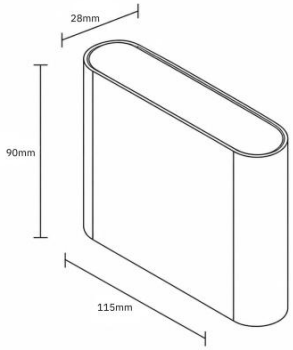

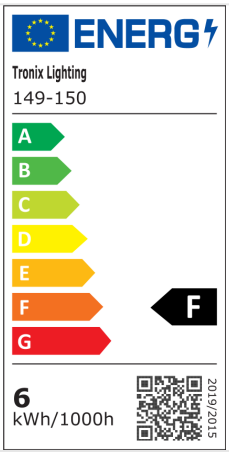
07.11.2026 - Disclaimer: information subject to change.