TRONIX guided by light

Wall lamp | up & down 115x90mm | black | 7W | 3000K | dim

ARTICLE NUMBER: 149-152

View this product in our webshop



07.11.2026 - Disclaimer: information subject to change.

This ultra-slim 28 mm wall light combines style and functionality. The 2700K warm white up-and-down light creates an inviting ambiance in commercial and hospitality settings.

Key Product Features:

- **Colour temperature (K):** 3000
- **Housing colour:** Black
- **Material cover:** Glass transparent
- **Length (mm):** 115
- **Max. system power (W):** 7
- **Dimmable:** Yes
- **Degree of protection (IP):** IP54

Technical specifications:

Product Name	Wall lamp | up & down 115x90mm | black | 7W | 3000K | dim
Ean	8714984952379
Outer box qty	40st
Lamp type	LED not exchangeable
Housing material	Aluminium
Housing colour	Black
Material cover	Glass transparent
Suitable for emergency lighting	No
Nominal current	27 - 27mA
Voltage type	AC
Type of control gear	LED operating device current-controlled
With control gear	Yes
Constant light output (CLO)	No
Type of grid	None
Nominal voltage	220 - 240V


07.11.2026 - Disclaimer: information subject to change.

Length	115mm
Width	28mm
Height/depth	90mm
Colour of light	White
Colour rendering index CRI	80-89
Exchangeable control gear	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming phase cut-off (trailing edge)	Yes
With movement sensor	No
With presence detector	No
Impact strength	IK06
With light sensor	No
Suitable for surface mounting	Yes
Suitable for built-in mounting	No
Light distribution	Symmetric
Beam angle	> 80° - Extreme wide beam
Light outlet	Direct
Dimming RF	No
Dimming Zigbee	No
Light distributor	None
Surface protection housing	Powder coating
Colour consistency (McAdam ellipse)	SDCM3
Rated lifetime L70/B50 at 25 °C	50000h
Colour of light adjustable	No
Luminous flux adjustable	Continuously variable

07.11.2026 - Disclaimer: information subject to change.

Max. system power	7W
Beam angle adjustable	No
Power factor	0.94
Type of wiring	Ending
Number of poles	3
Compatible with Casambi	No
Luminaire efficacy	90 - 90lm/W
Dimmable	Yes
Rated luminous flux according to IEC 62722-2- 1	630 - 630lm
Emergency power supply system	None
Suitable for ceiling mounting	No
Connectable conductor cross section	0.75 - 0.75mm²
Suitable for wall mounting	Yes
Suitable for suspended mounting	No
Suitable for workplace according to EN 12464-1	No
Degree of protection (IP), rear side	IP20
Degree of protection (IP), front side	IP54
With mounting material	Yes
Colour temperature	3000K
With connection cord and plug	No
Warranty	5 years
Ambient temperature	-20 - 45°C


07.11.2026 - Disclaimer: information subject to change.









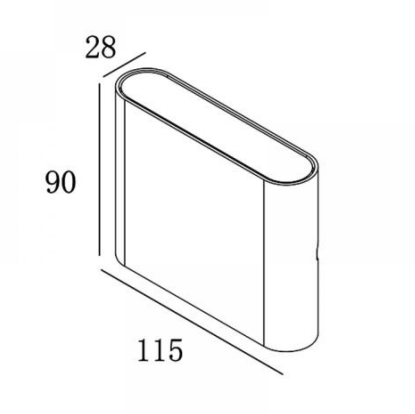

07.11.2026 - Disclaimer: information subject to change.