

Wall lamp | up & down 115x90mm | black |
7W | 3000K | dim

ARTICLE NUMBER: 149-152

View this
product in
our
webshop



14.07.2026 - Disclaimer: information subject to change.

This ultra-slim 28 mm wall light combines style and functionality. The 2700K warm white up-and-down light creates an inviting ambiance in commercial and hospitality settings.

Key Product Features:

- **Colour temperature (K):** 3000
- **Housing colour:** Black
- **Material cover:** Glass transparent
- **Length (mm):** 115
- **Max. system power (W):** 7
- **Dimmable:** Yes
- **Degree of protection (IP):** IP54

Technical specifications:

Product Name	Wall lamp up & down 115x90mm black 7W 3000K dim
Ean	8714984952379
Outer box qty	40st
Lamp type	LED not exchangeable
Housing material	Aluminium
Housing colour	Black
Material cover	Glass transparent
Suitable for emergency lighting	No
Nominal current	27 - 27mA
Voltage type	AC
Type of control gear	LED operating device current-controlled
With control gear	Yes
Constant light output (CLO)	No
Type of grid	None
Nominal voltage	220 - 240V




14.07.2026 - Disclaimer: information subject to change.

Length	115mm
Width	28mm
Height/depth	90mm
Colour of light	White
Colour rendering index CRI	80-89
Exchangeable control gear	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming phase cut-off (trailing edge)	Yes
With movement sensor	No
With presence detector	No
Impact strength	IK06
With light sensor	No
Suitable for surface mounting	Yes
Suitable for built-in mounting	No
Light distribution	Symmetric
Beam angle	> 80° - Extreme wide beam
Light outlet	Direct
Dimming RF	No
Dimming Zigbee	No
Light distributor	None
Surface protection housing	Powder coating
Colour consistency (McAdam ellipse)	SDCM3
Rated lifetime L70/B50 at 25 °C	50000h
Colour of light adjustable	No
Luminous flux adjustable	Continuously variable

14.07.2026 - Disclaimer: information subject to change.

Max. system power	7W
Beam angle adjustable	No
Power factor	0.94
Type of wiring	Ending
Number of poles	3
Compatible with Casambi	No
Luminaire efficacy	90 - 90lm/W
Dimmable	Yes
Rated luminous flux according to IEC 62722-2- 1	630 - 630lm
Emergency power supply system	None
Suitable for ceiling mounting	No
Connectable conductor cross section	0.75 - 0.75mm??
Suitable for wall mounting	Yes
Suitable for suspended mounting	No
Suitable for workplace according to EN 12464-1	No
Unified Glare Ratio (UGR)	22.3
Degree of protection (IP), rear side	IP20
Degree of protection (IP), front side	IP54
With mounting material	Yes
Colour temperature	3000K
With connection cord and plug	No
Warranty	5 years

14.07.2026 - Disclaimer: information subject to change.

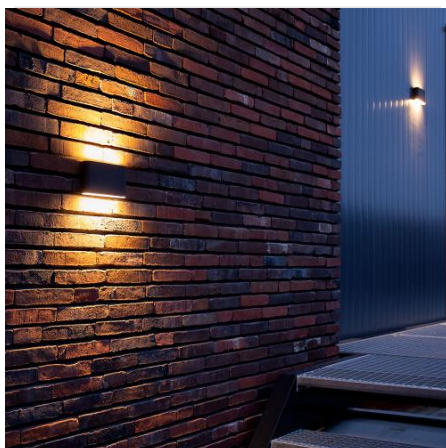

14.07.2026 - Disclaimer: information subject to change.