TRONIX guided by light

Wall lamp | up & down | black | 5,5W | 3000K | non dim

ARTICLE NUMBER: 149-160

View this product in our webshop



07.11.2026 - Disclaimer: information subject to change.

This wall lamp is only 10 cm high, but the beam of 25° spreads a very attractive warm light. The light beam shines both upwards and downwards, giving a garden fence or exterior wall a playful effect.

Features

- IP65
- Only 100 x 38 mm
- 2 x 161 Lm
- Incl. internal driver, non dimmable

Technical specifications:

Product Name	Wall lamp | up & down | black | 5,5W | 3000K | non dim
Ean	8714984935785
Outer box qty	40st
Lamp type	LED not exchangeable
Housing material	Aluminium
Housing colour	Black
Material cover	Glass transparent
Suitable for emergency lighting	No
Nominal current	32 - 32mA
Voltage type	AC
Type of control gear	LED operating device current-controlled
With control gear	Yes
Constant light output (CLO)	No
Type of grid	None
Nominal voltage	220 - 240V
Length	100mm
Width	38mm
Height/depth	61mm

07.11.2026 - Disclaimer: information subject to change.

Colour of light	White
Colour rendering index CRI	80-89
Exchangeable control gear	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming phase cut-off (trailing edge)	No
With movement sensor	No
With presence detector	No
Impact strength	IK06
With light sensor	No
Suitable for surface mounting	Yes
Suitable for built-in mounting	No
Light distribution	Symmetric
Beam angle	21-40° - Medium beam
Light outlet	Direct
Dimming RF	No
Dimming Zigbee	No
Light distributor	Focal lens
Surface protection housing	Powder coating
Colour consistency (McAdam ellipse)	SDCM3
Rated lifetime L70/B50 at 25 °C	50000h
Colour of light adjustable	No
Luminous flux adjustable	No
Max. system power	5.5W
Beam angle adjustable	No
Power factor	0.81


07.11.2026 - Disclaimer: information subject to change.


Type of wiring	Ending
Number of poles	3
Compatible with Casambi	No
Luminaire efficacy	80 - 80lm/W
Dimmable	No
Rated luminous flux according to IEC 62722-2- 1	440 - 440lm
Emergency power supply system	None
Suitable for ceiling mounting	No
Connectable conductor cross section	0.75 - 0.75mm²
Suitable for wall mounting	Yes
Suitable for suspended mounting	No
Suitable for workplace according to EN 12464-1	No
Degree of protection (IP), front side	IP65
With mounting material	Yes
Colour temperature	3000K
With connection cord and plug	No
Warranty	5 years
Ambient temperature	-20 - 40°C

07.11.2026 - Disclaimer: information subject to change.







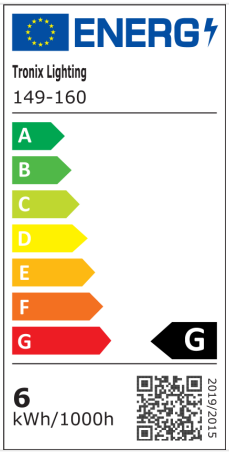

07.11.2026 - Disclaimer: information subject to change.