

Wall light | 251*167mm | 7W | IP65 |
2700-3000K

ARTICLE NUMBER: 136-240

View this
product in
our
webshop



14.09.2026 - Disclaimer: information subject to change.



CARE



SHARE



CONNECT



This versatile wall light features an adjustable Colour temperature (2700K or 3000K), an impact-resistant opal plastic cover (IK08), and IP65 protection. Also available in a version with a PIR sensor for motion detection.

Key product features:

- **Colour temperature (K):** 2700 - 3000
- **Material cover:** Plastic, opal
- **With movement sensor:** No
- **Impact strength:** IK08
- **Max. system power (W):** 7
- **Colour of light adjustable:** Positions

Technical specifications:

Product Name	Wall light 251*167mm 7W IP65 2700-3000K
Ean	8714984942448
Outer box qty	12st
Lamp type	LED not exchangeable
Housing material	Aluminium
Housing colour	Black
Material cover	Plastic, opal
Suitable for emergency lighting	No
Nominal current	35 - 35mA
Voltage type	AC
Type of control gear	LED operating device current-controlled
With control gear	Yes
Constant light output (CLO)	No
Type of grid	Matt
Nominal voltage	220 - 240V




14.09.2026 - Disclaimer: information subject to change.

Length	251mm
Width	167mm
Height/depth	80mm
Colour of light	White
Colour rendering index CRI	80-89
Exchangeable control gear	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming phase cut-off (trailing edge)	No
With movement sensor	No
With presence detector	No
Impact strength	IK08
With light sensor	No
Suitable for surface mounting	Yes
Suitable for built-in mounting	No
Light distribution	Symmetric
Beam angle	> 80° - Extreme wide beam
Light outlet	Direct
Dimming RF	No
Dimming Zigbee	No
Light distributor	Other
Surface protection housing	Lacquered
Colour consistency (McAdam ellipse)	SDCM6
Rated lifetime L70/B50 at 25 °C	50000h
Colour of light adjustable	Positions
Luminous flux adjustable	No

14.09.2026 - Disclaimer: information subject to change.

Max. system power	7W
Beam angle adjustable	No
Power factor	0.87
Type of wiring	Ending
Number of poles	3
Compatible with Casambi	No
Luminaire efficacy	100 - 100lm/W
Dimmable	No
Rated luminous flux according to IEC 62722-2- 1	726 - 726lm
Emergency power supply system	None
Suitable for ceiling mounting	Yes
Connectable conductor cross section	0.75 - 0.75mm ²
Suitable for wall mounting	Yes
Suitable for suspended mounting	No
Suitable for workplace according to EN 12464-1	No
Unified Glare Ratio (UGR)	25
Degree of protection (IP), front side	IP65
With mounting material	Yes
Colour temperature	2700 - 3000K
With connection cord and plug	No
Warranty	5 years
Ambient temperature	-20 - 65°C

14.09.2026 - Disclaimer: information subject to change.

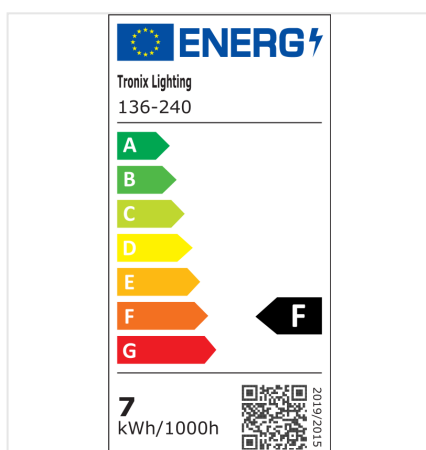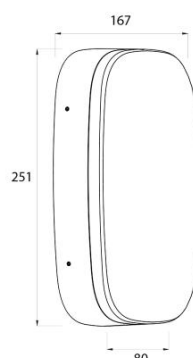

14.09.2026 - Disclaimer: information subject to change.