

Wall light | 251*167mm | 7W | IP65 | 2700-3000K | PIR Sensor

ARTICLE NUMBER: 136-241

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.



This versatile wall light features an adjustable Colour temperature (2700K or 3000K), an impact-resistant opal plastic cover (IK08), and IP65 protection. Also equipped with a PIR sensor for motion detection.

Key product features:

- **Colour temperature (K):** 2700 - 3000
- **Material cover:** Plastic, opal
- **With movement sensor:** Yes
- **Impact strength:** IK08
- **Max. system power (W):** 7
- **Colour of light adjustable:** Positions
- **Movement sensor technology:** Passive infrared

Technical specifications:

Product Name	Wall light 251*167mm 7W IP65 2700-3000K PIR Sensor
Ean	8714984942455
Outer box qty	12st
Lamp type	LED not exchangeable
Housing material	Aluminium
Housing colour	Black
Material cover	Plastic, opal
Suitable for emergency lighting	No
Nominal current	35 - 35mA
Voltage type	AC
Type of control gear	LED operating device current-controlled
With control gear	Yes
Constant light output (CLO)	No
Type of grid	Matt
Nominal voltage	220 - 240V



24.08.2026 - Disclaimer: information subject to change.

Length	251mm
Width	167mm
Height/depth	80mm
Colour of light	White
Colour rendering index CRI	80-89
Exchangeable control gear	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming phase cut-off (trailing edge)	No
With movement sensor	Yes
With presence detector	No
Impact strength	IK08
With light sensor	No
Suitable for surface mounting	Yes
Suitable for built-in mounting	No
Light distribution	Symmetric
Beam angle	> 80° - Extreme wide beam
Light outlet	Direct
Dimming RF	No
Dimming Zigbee	No
Light distributor	Other
Surface protection housing	Lacquered
Colour consistency (McAdam ellipse)	SDCM6
Rated lifetime L70/B50 at 25 °C	50000h
Colour of light adjustable	Positions
Luminous flux adjustable	No

24.08.2026 - Disclaimer: information subject to change.

Max. system power	7W
Beam angle adjustable	No
Power factor	0.87
Type of wiring	Ending
Number of poles	3
Compatible with Casambi	No
Luminaire efficacy	100 - 100lm/W
Dimmable	No
Rated luminous flux according to IEC 62722-2- 1	726 - 726lm
Emergency power supply system	None
Suitable for ceiling mounting	Yes
Connectable conductor cross section	0.75 - 0.75mm²
Suitable for wall mounting	Yes
Suitable for suspended mounting	No
Movement sensor/presence detector technology	Passive infrared
Suitable for workplace according to EN 12464-1	No
Unified Glare Ratio (UGR)	25
Degree of protection (IP), front side	IP65
With mounting material	Yes
Colour temperature	2700 - 3000K
With connection cord and plug	No
Warranty	5 years
Ambient temperature	-20 - 65°C

24.08.2026 - Disclaimer: information subject to change.

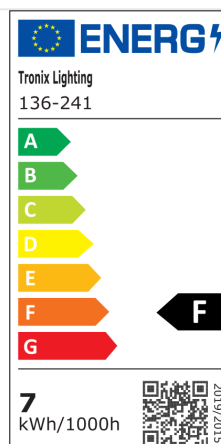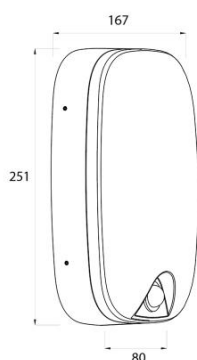

24.08.2026 - Disclaimer: information subject to change.