

Wall washer | 1 meter | 24V | 48W | IP66 |
RGBW | DMX512

ARTICLE NUMBER: 190-120

View this
product in
our
webshop



24.08.2026 - Disclaimer: information subject to change.



Designed for a high-powered color wash that can easily illuminate several metres down walls or across ceilings, this LED RGBW wall washer is ideal for signage and lighting of e.g. hotels, restaurants, clubs and bars. Create any imaginable color light shade effect mixing red, blue, green and white LEDs right at the source.

Features

- Powerful 48W illumination with ultra-bright lighting effect
- With 24 RGBW LEDs and 25°x45° optic lens for maximum light reach
- IP66 water-resistant and dustproof for sustainable outdoor use
- Equipped with fixing brackets: Screw in position and fix on the right angle
- Programmed on DMX channel 1. Preferring a different channel?
Please let us know!

Our LED RGB fixtures collection

The collection of LED RGB fixtures offers plenty of possibilities in terms of powerful, colorful lighting for facades and properties. These wall washers feature powerful LED chips in a sturdy frame, which offers high resistance to UV rays and weather. These fixtures also work on the basis of DMX512, so that every project can be taken care of down to the last detail.

Technical specifications:

Product Name	Wall washer 1 meter 24V 48W IP66 RGBW DMX512
Ean	8714984948952
Outer box qty	15st
Lamp type	LED not exchangeable
Lamp holder	None
Housing colour	Anthracite

24.08.2026 - Disclaimer: information subject to change.

Housing material	Aluminium
Material cover	Glass transparent
Length	1000mm
Width	50mm
Height/depth	78mm
Built-in length	- - -mm
Built-in width	- - -mm
Built-in height	- - -mm
Built-in diameter	0 - 0mm
Suitable for built-in mounting	No
Suitable for surface mounting	Yes
Suitable for pedestal/floor mounting	Yes
Suitable for wall mounting	No
Suitable for ceiling mounting	Yes
Suitable for light-track mounting	No
Suitable for clamp-mounting	No
With movement sensor	No
With light sensor	No
Colour of light	Multi-coloured
Colour consistency (McAdam ellipse)	SDCM3
Colour of light adjustable	Continuously variable
Reflector colour	Silver
Colour temperature	RGBW
Colour rendering index CRI	80-89
Luminous flux adjustable	Continuously variable
Light outlet	Direct
Beam angle	21-40° - Medium beam

24.08.2026 - Disclaimer: information subject to change.



Beam angle adjustable	No
Voltage type	DC
Nominal voltage	24 - 24V
Nominal current	- - -mA
Number of poles	5
Light distributor	Focal lens
Light distribution	Symmetric
Connectable conductor cross section	0.5 - 1mm ²
Type of control gear	LED operating device voltage-controlled
Exchangeable control gear	No
With control gear	No
Degree of protection (IP), front side	IP66
Surface protection	Powder coating
Impact strength	IK07
Rated lifetime L70/B50 at 25 °C	50000h
Max. system power	48W
Rated luminous flux according to IEC 62722-2- 1	- - -lm
Luminaire efficacy	- - -lm/W
Power factor	0.95
Suitable for lamp power	0 - 0W
Surface brushed	No
Type of wiring	Loop-through wiring included
Emergency power supply system	None
Emergency function monitoring system	None
Adjustability	Swivelling
Unified Glare Ratio (UGR)	19

24.08.2026 - Disclaimer: information subject to change.



Reflector	None
Warranty	3 years
Ambient temperature	-20 - 50°C

24.08.2026 - Disclaimer: information subject to change.

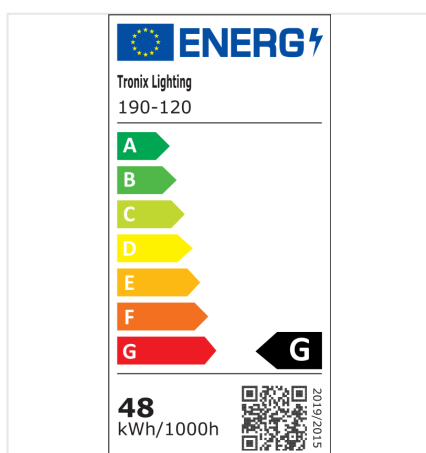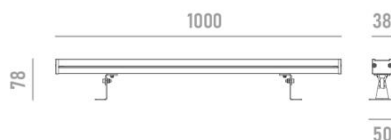

24.08.2026 - Disclaimer: information subject to change.