


# Zigbee || receiver | 100-240V trailing edge | recessed

ARTICLE NUMBER: 214-250

View this  
product in  
our  
webshop

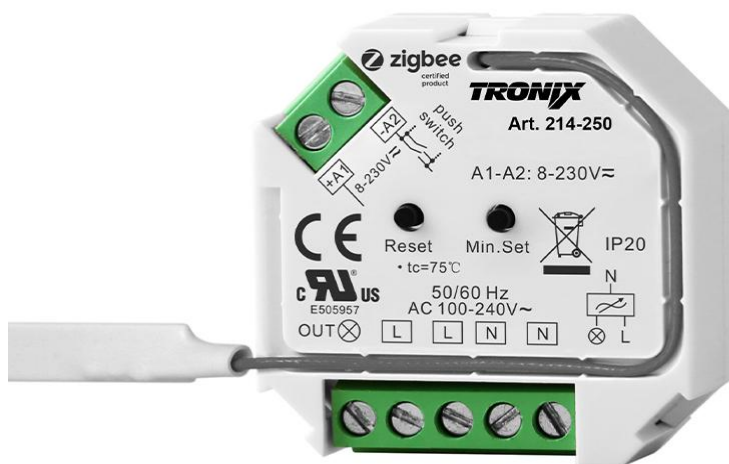

24.08.2026 - Disclaimer: information subject to change.



Zigbee 3.0 LED dimmer for wireless control of 230V LED lighting. Supports push-button operation, flicker-free dimming up to 200W and compatibility with leading smart home platforms.

## Key product features

- **Light value memory:** Yes
- **Nominal voltage (V):** 100 – 240
- **Control voltage (V):** 100 – 240
- **Dimming phase cut-off (trailing edge):** Yes
- **Max. switching power LED (W):** 200
- **Control method:** Zigbee


## Technical specifications:

|                                        |                                                        |
|----------------------------------------|--------------------------------------------------------|
| Product Name                           | Zigbee    receiver   100-240V trailing edge   recessed |
| Ean                                    | 8714984937604                                          |
| Outer box qty                          | 1st                                                    |
| Colour                                 | White                                                  |
| Connection type                        | Screwed terminal                                       |
| Operating method                       | Radio frequency (RF)                                   |
| Control method                         | Zigbee                                                 |
| Mounting method                        | Built-in                                               |
| Material                               | Plastic                                                |
| Material quality                       | Thermoplastic                                          |
| Device width                           | 45mm                                                   |
| Device height                          | 45mm                                                   |
| Device depth                           | 21mm                                                   |
| Applicable with presence indicator     | Yes                                                    |
| Suitable for degree of protection (IP) | IP20                                                   |
| Applicable with movement sensor        | Yes                                                    |

24.08.2026 - Disclaimer: information subject to change.

|                                         |                |
|-----------------------------------------|----------------|
| Applicable with button                  | Yes            |
| Applicable with transmission button     | Yes            |
| Applicable with time switch/timer       | Yes            |
| Nominal voltage                         | 100 - 240V     |
| Control voltage                         | 100 - 240V     |
| Min. depth of built-in installation box | 21mm           |
| Min. brightness controllable            | Yes            |
| Max. switching power LED                | 200W           |
| Light value memory                      | Yes            |
| Halogen free                            | Yes            |
| RAL-number (similar)                    | 9016           |
| Core cross section                      | 0.75 - 2.5mm?? |
| Warranty                                | 5 years        |

24.08.2026 - Disclaimer: information subject to change.

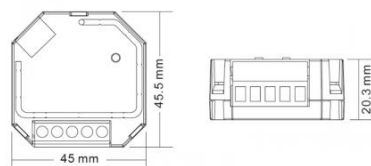

24.08.2026 - Disclaimer: information subject to change.