


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.58V I:0.0478A P:10.448W PF:0.9489 Freq:50.00Hz Lamp Flux:628.447x1 lm					
NAME: 136-181_3000K		TYPE:10W		WEIGHT:	
SPEC.:3000K		DIM.:		SERIAL No.:	
MFR.:		SUR.:0.064		Shielding Angle:	

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 60.15 lm/W
MODEL	136-181_3000K	I _{max} (cd)	232.7	S/MH(C0/180)	1.24	
NOMINAL POWER(W)	10	LOR(%)	100.0	S/MH(C90/270)	1.27	
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	628.45	η UP, DN(C0-180)	0.0, 48.5	
NOMINAL FLUX(lm)	628.447	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0, 51.5	
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)		η down(%)	100.0	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

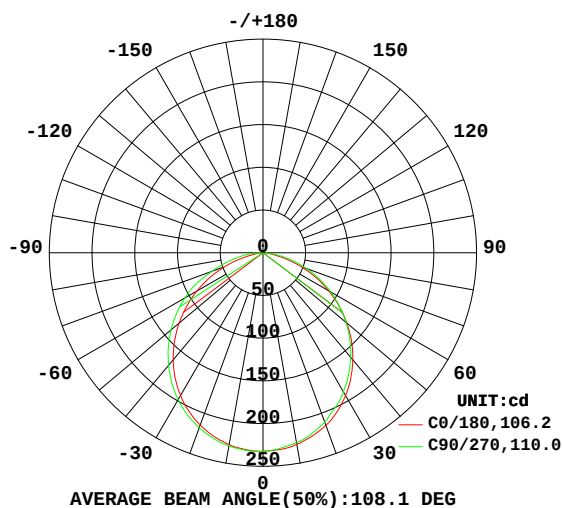

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

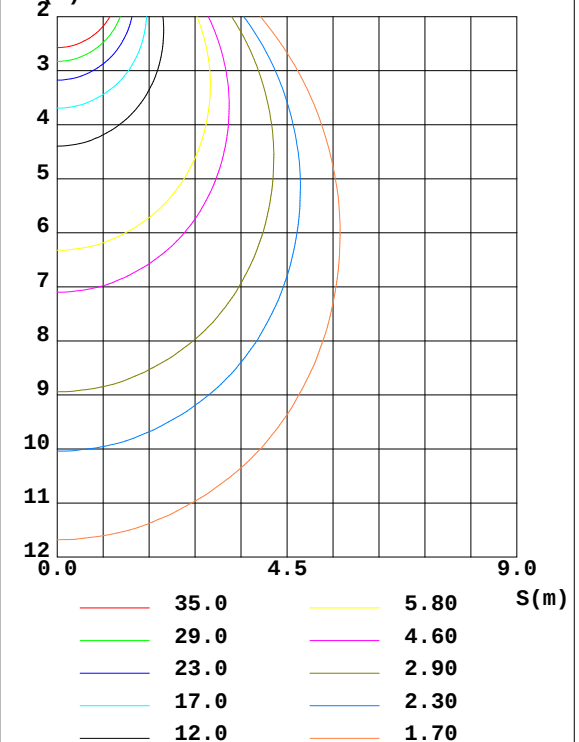

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2020-01-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-2000H_V1 SYSTEM V2.0.404.7
 Humidity: 65.0%
 Test Distance: 9.900m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	227.6	227.1	225.9	225.9	227.9	229.3	229.5	228.6	0- 10	21.95	21.95	3.49, 3.49
20	215.2	212.5	210.8	211.8	214.7	217.5	218.1	216.9	10- 20	62.70	84.66	13.5, 13.5
30	193.2	190.4	188.1	189.2	192.9	197.2	198.6	196.4	20- 30	94.40	179.1	28.5, 28.5
40	163.6	161.3	159.8	160.3	163.5	169.3	171.8	168.6	30- 40	112.4	291.5	46.4, 46.4
50	128.1	127.2	126.9	126.3	128.1	136.2	140.5	135.6	40- 50	114.5	406.0	64.6, 64.6
60	88.57	89.91	91.25	89.29	89.07	99.60	105.4	98.71	50- 60	100.9	506.8	80.6, 80.6
70	47.46	51.21	54.14	50.48	47.71	60.70	63.71	58.74	60- 70	73.51	580.4	92.3, 92.3
80	10.36	18.29	19.33	18.18	10.27	23.91	28.40	22.70	70- 80	37.49	617.8	98.3, 98.3
90	2.852	3.770	3.074	3.947	2.694	4.826	3.616	4.353	80- 90	10.60	628.4	100, 100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2020-01-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-2000H_V1 SYSTEM V2.0.404.7
 Humidity: 65.0%
 Test Distance: 9.900m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.58V I:0.0478A P:10.448W PF:0.9489 Freq:50.00Hz Lamp Flux:628.447x1 lm		
NAME: 136-181_3000K	TYPE:10W	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:
MFR.:	SUR.:0.064	Shielding Angle:

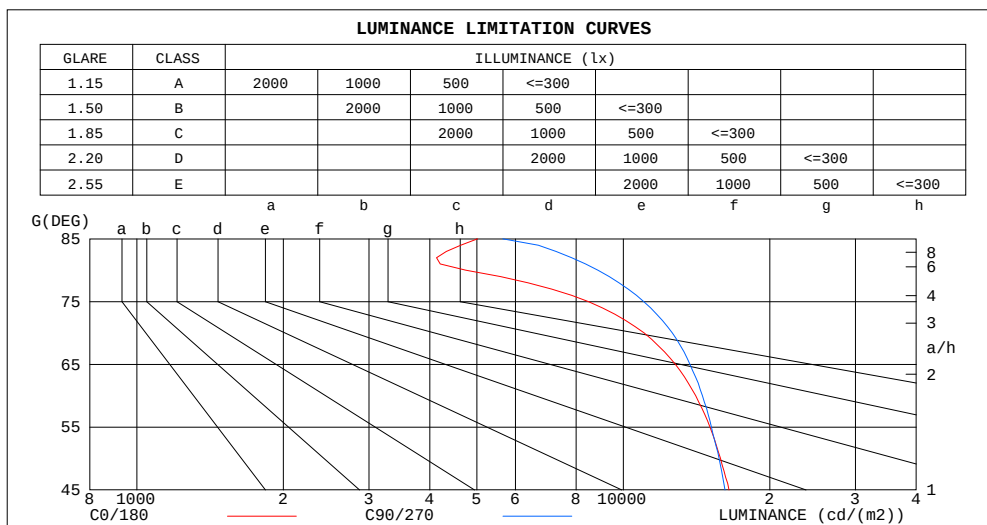

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	5013	5655
80	4743	8866
75	8469	11014
70	11032	12609
65	12797	13711
60	14082	14539
55	15072	15176
50	15843	15731
45	16490	16186


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-01-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000H_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:9.900m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.58V I:0.0478A P:10.448W PF:0.9489 Freq:50.00Hz Lamp Flux:628.447x1 lm		
NAME: 136-181_3000K	TYPE:10W	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:
MFR.:	SUR.:0.064	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.04	1.00	.96	1.02	.98	.95	.98	.95	.92	.94	.91	.89	.90	.88	.86	.84
2.0	.91	.85	.79	.89	.83	.78	.86	.81	.76	.83	.78	.74	.80	.76	.73	.71
3.0	.80	.72	.66	.79	.71	.65	.76	.69	.64	.73	.68	.63	.70	.66	.62	.60
4.0	.71	.63	.56	.70	.62	.56	.67	.60	.55	.65	.59	.54	.63	.58	.53	.51
5.0	.64	.55	.48	.63	.54	.48	.60	.53	.47	.58	.52	.47	.57	.51	.46	.44
6.0	.57	.49	.42	.56	.48	.42	.55	.47	.42	.53	.46	.41	.51	.45	.41	.39
7.0	.52	.43	.37	.51	.43	.37	.50	.42	.37	.48	.42	.37	.47	.41	.36	.34
8.0	.48	.39	.33	.47	.39	.33	.46	.38	.33	.44	.38	.33	.43	.37	.33	.31
9.0	.44	.35	.30	.43	.35	.30	.42	.35	.30	.41	.34	.30	.40	.34	.29	.28
10.0	.40	.32	.27	.40	.32	.27	.39	.32	.27	.38	.31	.27	.37	.31	.27	.25

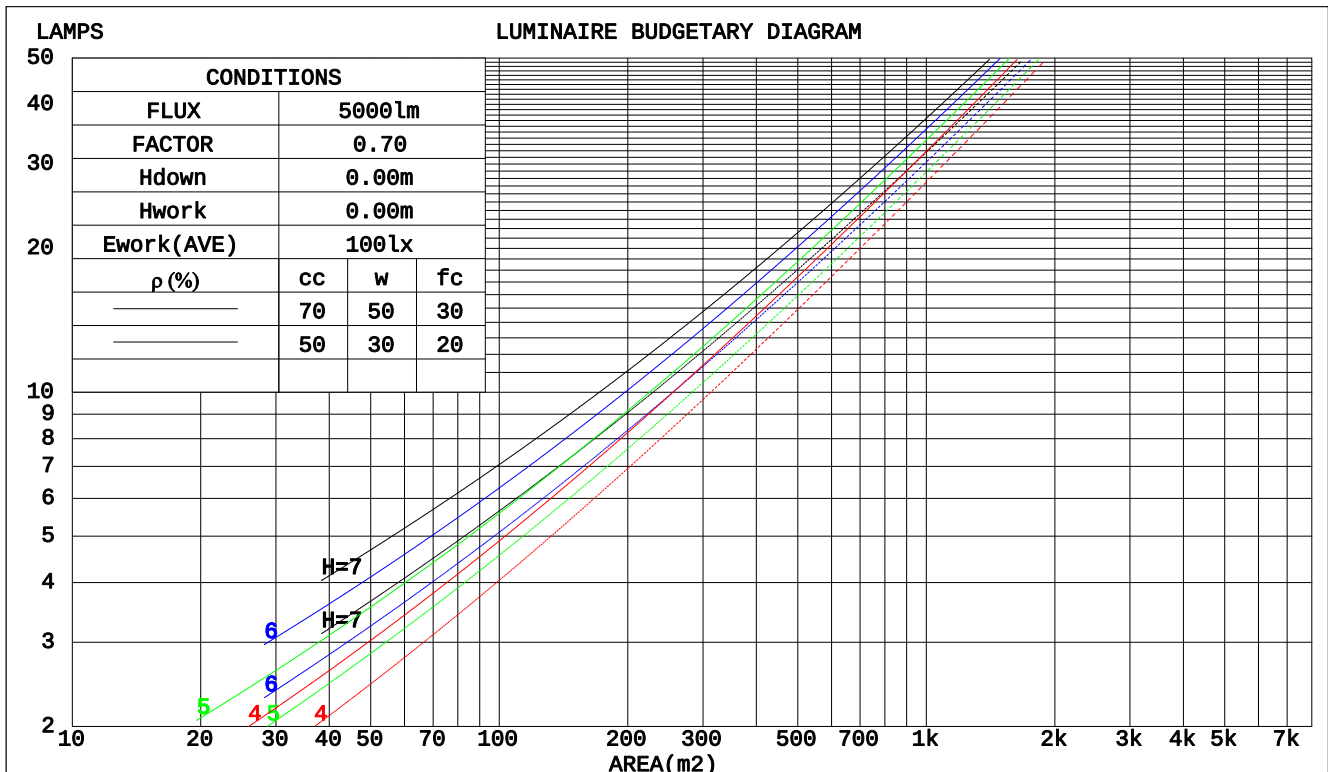

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2020-01-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-2000H_V1 SYSTEM V2.0.404.7
 Humidity: 65.0%
 Test Distance: 9.900m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:230.58V I:0.0478A P:10.448W PF:0.9489 Freq:50.00Hz Lamp Flux:628.447x1 lm									
NAME:				TYPE:10W				WEIGHT:	
SPEC.:3000K				DIM.:				SERIAL No.:	
MFR.:				SUR.:0.064				Shielding Angle:	

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.300	.171	.054	.293	.167	.053	.280	.161	.051	.268	.154	.050	.257	.149	.048		
2.0	.284	.156	.048	.278	.153	.047	.266	.148	.046	.256	.143	.045	.246	.139	.044		
3.0	.264	.141	.042	.259	.138	.042	.248	.135	.041	.239	.131	.040	.230	.127	.039		
4.0	.244	.127	.037	.240	.125	.037	.231	.122	.037	.222	.119	.036	.214	.116	.035		
5.0	.227	.115	.033	.222	.114	.033	.214	.112	.033	.207	.109	.032	.200	.107	.032		
6.0	.211	.106	.030	.207	.104	.030	.200	.102	.030	.193	.100	.029	.187	.098	.029		
7.0	.196	.097	.028	.193	.096	.027	.187	.094	.027	.180	.093	.027	.175	.091	.027		
8.0	.184	.090	.025	.181	.089	.025	.175	.087	.025	.169	.086	.025	.164	.084	.025		
9.0	.172	.083	.023	.170	.083	.023	.164	.081	.023	.160	.080	.023	.155	.079	.023		
10.0	.162	.078	.022	.160	.077	.022	.155	.076	.021	.151	.075	.021	.146	.074	.021		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.180	.156	.135	.154	.134	.116	.105	.092	.080	.061	.053	.047	.019	.017	.015	
2.0	.171	.132	.099	.147	.114	.086	.100	.079	.060	.058	.046	.035	.019	.015	.011	
3.0	.163	.114	.075	.140	.099	.065	.096	.068	.046	.056	.040	.027	.018	.013	.009	
4.0	.156	.101	.059	.134	.087	.051	.092	.061	.036	.053	.036	.021	.017	.012	.007	
5.0	.148	.090	.048	.127	.078	.042	.088	.055	.029	.051	.032	.017	.016	.010	.006	
6.0	.141	.082	.040	.121	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.134	.075	.034	.116	.065	.029	.080	.046	.021	.046	.027	.012	.015	.009	.004	
8.0	.128	.069	.029	.110	.060	.025	.076	.042	.018	.044	.025	.011	.014	.008	.004	
9.0	.122	.064	.025	.105	.056	.022	.073	.039	.016	.042	.023	.009	.014	.008	.003	
10.0	.116	.060	.023	.100	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-01-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000H_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:9.900m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.58V I:0.0478A P:10.448W PF:0.9489 Freq:50.00Hz Lamp Flux:628.447x1 lm										
NAME: 136-181_3000K					TYPE:10W			WEIGHT:		
SPEC.:3000K					DIM.:			SERIAL No.:		
MFR.:					SUR.:0.064			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.1	23.6	22.4	23.8	24.0	22.2	23.7	22.4	23.9	24.1
3H	23.3	24.7	23.6	24.9	25.1	23.5	24.9	23.8	25.1	25.4
4H	23.6	24.9	23.9	25.2	25.4	24.0	25.3	24.3	25.6	25.8
6H	23.7	25.0	24.1	25.2	25.5	24.3	25.5	24.6	25.8	26.1
8H	23.7	24.9	24.1	25.2	25.5	24.4	25.6	24.7	25.9	26.1
12H	23.7	24.9	24.1	25.2	25.5	24.4	25.5	24.7	25.8	26.1
4H 2H	22.6	24.0	23.0	24.2	24.5	22.7	24.0	23.0	24.3	24.5
3H	24.0	25.2	24.4	25.4	25.7	24.2	25.4	24.6	25.7	26.0
4H	24.4	25.5	24.8	25.8	26.1	24.8	25.9	25.2	26.2	26.5
6H	24.6	25.6	25.0	25.9	26.3	25.2	26.1	25.6	26.5	26.9
8H	24.7	25.5	25.1	25.9	26.3	25.3	26.2	25.7	26.6	26.9
12H	24.7	25.5	25.1	25.9	26.3	25.4	26.2	25.8	26.6	27.0
8H 4H	24.6	25.5	25.1	25.9	26.3	25.0	25.8	25.4	26.2	26.6
6H	24.9	25.6	25.4	26.1	26.5	25.5	26.2	25.9	26.6	27.0
8H	25.0	25.6	25.5	26.1	26.5	25.7	26.3	26.1	26.7	27.2
12H	25.1	25.6	25.6	26.1	26.6	25.8	26.3	26.3	26.8	27.2
12H 4H	24.6	25.4	25.1	25.8	26.2	25.0	25.8	25.4	26.1	26.5
6H	25.0	25.6	25.4	26.0	26.5	25.5	26.2	26.0	26.6	27.0
8H	25.1	25.6	25.6	26.1	26.6	25.7	26.3	26.2	26.7	27.2
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.3				
2.0H	+ 0.3 / - 0.4					+ 0.3 / - 0.3				

CIE Pub.117, 628.4 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = -1.6$)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-01-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000H_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:9.900m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.58V I:0.0478A P:10.448W PF:0.9489 Freq:50.00Hz Lamp Flux:628.447x1 lm		
NAME: 136-181_3000K	TYPE:10W	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:
MFR.:	SUR.:0.064	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	47	40	58	47	40	57	46	40	33
0.80	69	57	50	68	57	50	66	56	49	43
1.00	77	66	59	76	66	59	74	67	58	51
1.25	84	74	67	83	73	66	80	72	66	58
1.50	89	79	73	87	78	72	84	77	71	64
2.00	96	87	81	94	86	80	90	84	79	71
2.50	100	92	86	98	91	85	94	88	83	75
3.00	103	96	91	101	95	90	97	92	88	79
4.00	107	101	97	104	99	95	100	96	93	84
5.00	109	104	100	107	102	99	102	99	96	87
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-01-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000H_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:9.900m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:230.58V I:0.0478A P:10.448W PF:0.9489 Freq:50.00Hz Lamp Flux:628.447x1 lm		
NAME: 136-181_3000K	TYPE:10W	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:
MFR.:	SUR.:0.064	Shielding Angle:

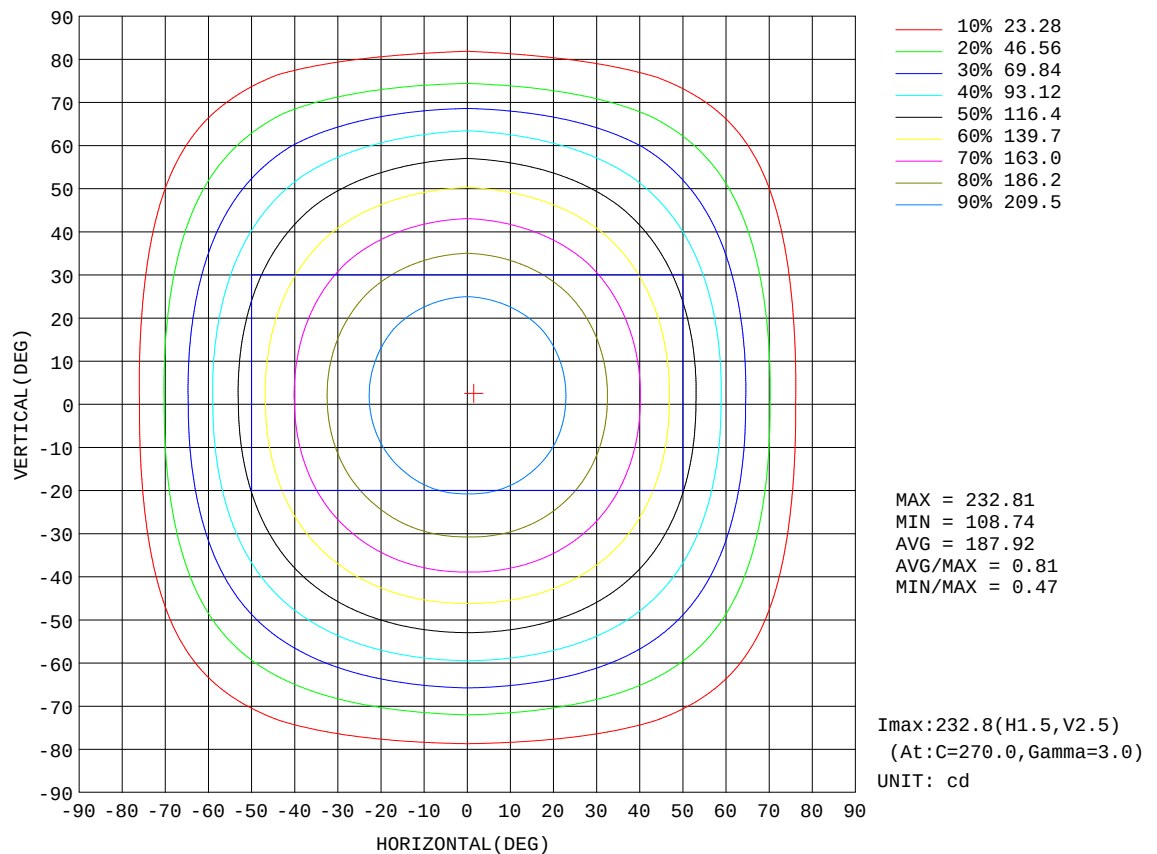


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2020-01-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000H_V1 SYSTEM V2.0.404.7
Humidity: 65.0%
Test Distance: 9.900m [K=1.0000]
Remarks:

AAI Figure

Test:U:230.58V I:0.0478A P:10.448W PF:0.9489 Freq:50.00Hz Lamp Flux:628.447x1 lm		
NAME: 136-181_3000K	TYPE:10W	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:
MFR.:	SUR.:0.064	Shielding Angle:

Flux out:448.8 lm

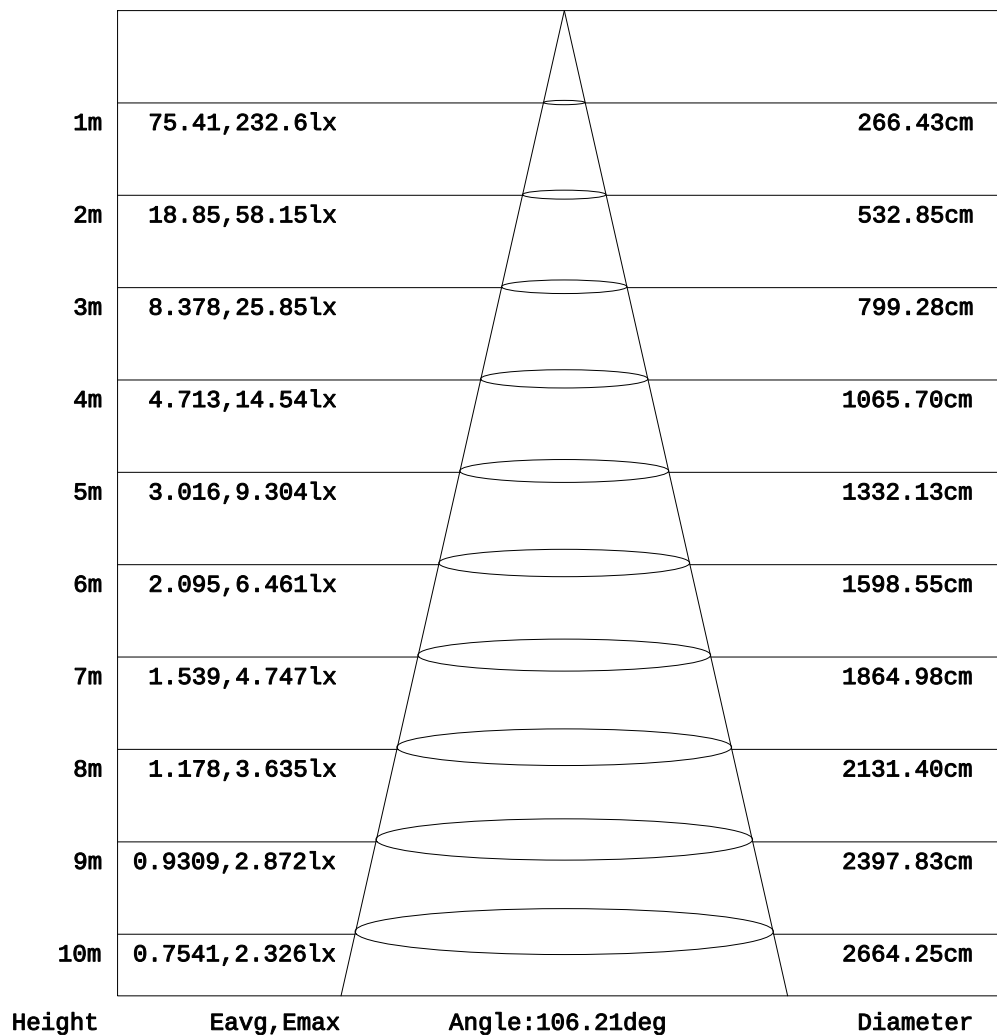


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-01-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000H_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:9.900m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:230.58V I:0.0478A P:10.448W PF:0.9489 Freq:50.00Hz Lamp Flux:628.447x1 lm		
NAME: 136-181_3000K	TYPE:10W	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:
MFR.:	SUR.:0.064	Shielding Angle:

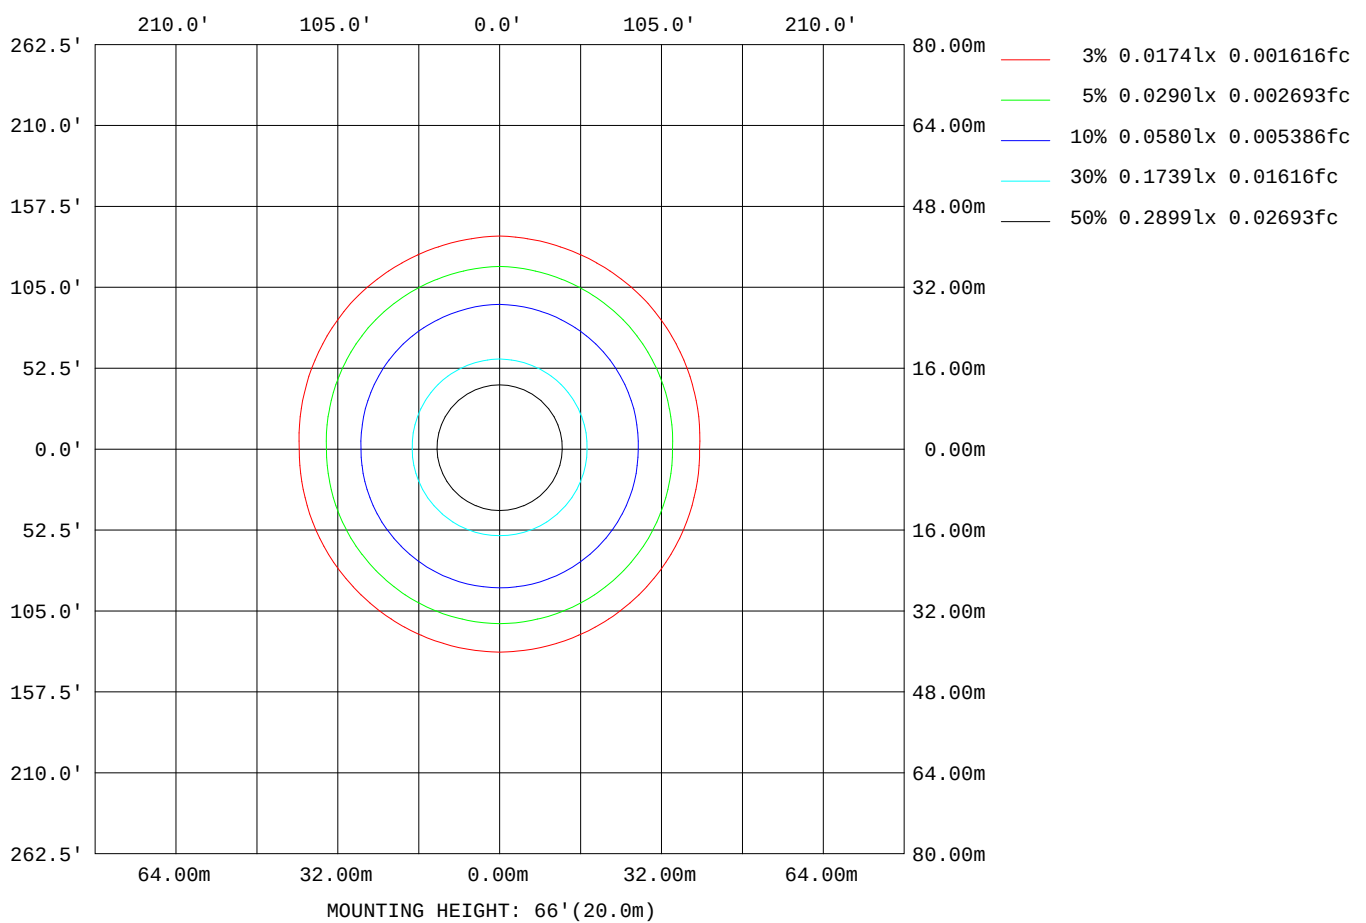

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2020-01-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000H_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:9.900m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:230.58V I:0.0478A P:10.448W PF:0.9489 Freq:50.00Hz Lamp Flux:628.447x1 lm		
NAME: 136-181_3000K	TYPE:10W	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:
MFR.:	SUR.:0.064	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	12874
L_0~180(75)av	8414
L_0~180(85)av	4915
L_90~270(65)av	14983
L_90~270(75)av	12306
L_90~270(85)av	9731
L_45(65)av	14128
L_45(75)av	11183
L_45(85)av	9555

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2020-01-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000H_V1 SYSTEM V2.0.404.7
 Humidity:65.0%
 Test Distance:9.900m [K=1.0000]
 Remarks:

Planar Illuminance Curve

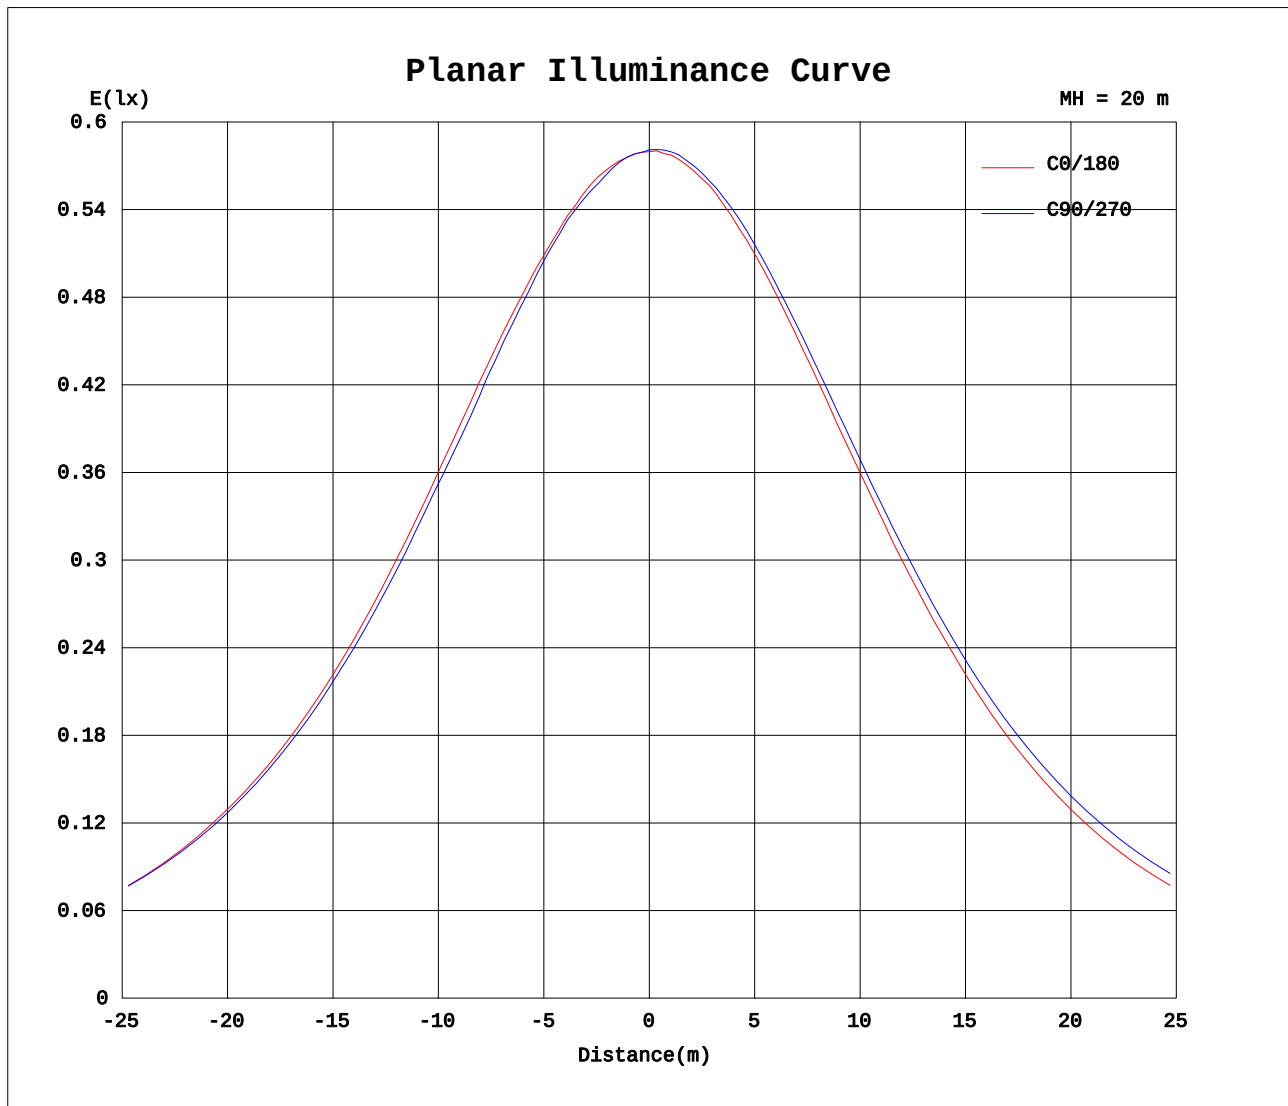

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2020-01-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-2000H_V1 SYSTEM V2.0.404.7
Humidity: 65.0%
Test Distance: 9.900m [K=1.0000]
Remarks:

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE G0-2000H_V1 SYSTEM V2.0.404.7
 Humidity:65.0%
 Test Distance:9.900m [K=1.0000]
 Remarks: