



## PHOTOMETRIC LIGHT REPORT

**Spot | 82x82mm | square |  
white | 5/7W | 3CCT/DTW**

**Article number: 136-820**



Go to the  
webshop  
of Tronix  
Lighting



**TRONIX**



136-820 Spot | 82x82mm | square | white | 5/7W | 3CCT/DTW

## Introduction

### Purpose of this Document

This document provides accurate and objective photometric data for Tronix Lighting item 136-820. All information is based on actual measurements taken from standard production units. No modifications were made to enhance performance results. In some cases, minor adjustments—such as temporary removal of covers, cables, or mounting features—were necessary for testing purposes. These did not influence product performance.

### Test Methodology

Testing was conducted using randomly selected, unopened samples from regular inventory. All tests comply with the LM-79-19 standard, the recognized method for photometric and electrical measurements of LED and OLED luminaires. This standard, an update of IES LM-79-2008, outlines environmental test conditions, stabilization procedures, measurement methods, and approved instruments. It uses absolute photometry, meaning results directly reflect the performance of the tested product, without comparison to rated lamp standards.

### Product 136-820 was tested using:

- A photogoniometer to measure luminous intensity distribution at various angles
- An integrating sphere to determine total luminous flux and colour characteristics

### Compliance & Certification

Item 136-820 meets the requirements of the following EU directives. Tronix Lighting certifies that all relevant tests were executed in accordance with the applicable standards, and the CE mark is applied accordingly:

- General Product Safety – Directive 2023/988/EC
- Low Voltage Directive (LVD) – Directive 2014/35/EU
- Electromagnetic Compatibility (EMC) – Directive 2004/108/EC
- Ecodesign – Directive 2009/125/EC
- RoHS 3 – Directive 2011/65/EU + Amendment 2015/863/EU

### Recycling & Sustainability

Tronix Lighting is affiliated with national recycling systems for electrical and electronic waste. The luminaire is over 90% recyclable when disposed of as electronic waste at end of life. In addition, Tronix Lighting participates in national packaging recycling schemes, ensuring full compliance with both the WEEE and packaging directives.

136-820 Spot | 82x82mm | square | white | 5/7W | 3CCT/DTW

## Laboratory and equipment

|                                      |                                                                                              |
|--------------------------------------|----------------------------------------------------------------------------------------------|
| Laboratory owner and location        | Tronix Lighting BV. Uden. The Netherlands                                                    |
| Gonio spectrometer system and type   | Viso Systems Type C. horizontal                                                              |
| Spectrometer manufacturer and model  | (Gonio) Ocean Optics STS VIS<br>(Sphere) Admesy HERA VIS 380–780nm                           |
| Flicker meter manufacturer and model | Viso Systems LabFlicker                                                                      |
| Oscilloscope manufacturer and model  | Tektronix MDO3024 oscilloscope (4 Channels. 200 MHz)                                         |
| Power meter manufacturer and model   | Vitretek PA900 Precision Multi-Channel Harmonic Power Analyzer                               |
| Power source manufacturer and model  | (DC) Keithley Source Measure Unit SMU-2420 3A DC Source Meter<br>(AC) Chroma 61601 AC Source |
| Datalogger Manufacturer and Model    | Omega 8-Channel Thermocouple Thermometer/Data Logger                                         |

## Measurement conditions gonio spectrometer

|                                             |                                         |
|---------------------------------------------|-----------------------------------------|
| Number of C-planes and Resolution           | 2 planes – 180°                         |
| γ (gamma)-Resolution                        | 1°                                      |
| Test Distance                               | 1.14 m                                  |
| Room Temperature and Humidity               | 22°C +/- 10% – RH 50% +/- 20%           |
| Input Power. Power and Displacement Factors | 6.4 W – PF 0.92 – DPF 0.94              |
| Frequency of Input Power                    | 50 Hz                                   |
| Warm-up Time and Variation                  | Lamp stabilized in 15 min 27 sec --2.2% |

## Tested light source

|                             |                                                   |
|-----------------------------|---------------------------------------------------|
| Manufacturer and Order Code | Tronix Lighting – 136-820                         |
| Product Description         | Spot   82x82mm   square   white   5/7W   3CCT/DTW |

## Main Light Measurement Results

|                                       |                                           |
|---------------------------------------|-------------------------------------------|
| Output – Total Lumen (Up% / Down%)    | 429 lm – 0% / 100%                        |
| Efficiency                            | 67 lm/W                                   |
| Energy efficiency class               | G                                         |
| Peak Intensity and Beam Angle         | 490 cd – 36.7°                            |
| Correlated Colour Temperature         | CCT = 3198 K                              |
| Colour Shift. CIE duv                 | Duv -0.0030                               |
| Colour Rendering Index                | CRI 93.6                                  |
| Colour Rendering TM30-18              | R <sub>f</sub> 91.5 – R <sub>g</sub> 99.9 |
| Television Lighting Consistency Index | TLCI = 89                                 |
| Flicker                               | SVM 0.01 – PstLM 0.21                     |



136-820 Spot | 82x82mm | square | white | 5/7W | 3CCT/DTW


Electrical measurement details

**Input Power**

RMS Input voltage feed.  $V_{RMS}$   
RMS Input current feed.  $I_{RMS}$   
Total input power

Frequency of input power  
Power factor  
Displacement power factor

Total harmonic distortion of the current  
Total harmonic distortion of the voltage

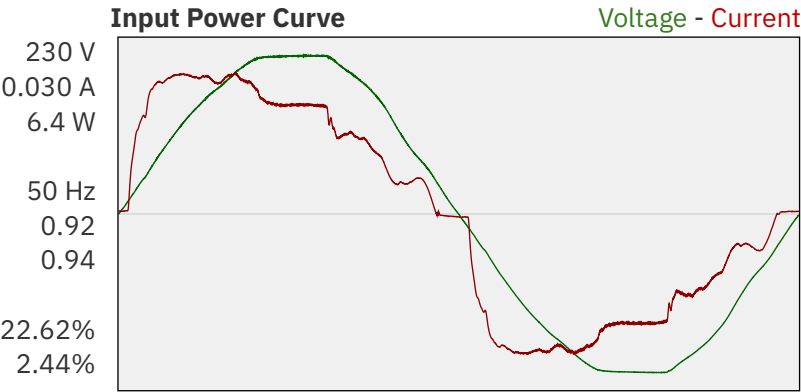

**Efficiency**


Radiated power efficiency: 22.3%

Lumen efficiency: 67 lm/W

**Harmonics**

3rd Harmonic 17.02%  
5th Harmonic 10.06%  
7th Harmonic 6.02%  
9th Harmonic 5.44%  
11th Harmonic 1.19%

**Current Harmonics %**

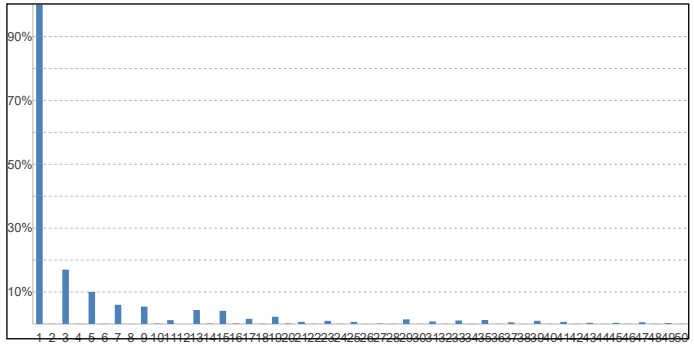

Stabilization Details

**Warm-up Conditions**

Stable period  
Stable change max  
Minimum warm-up time

**Colour temperature change during warm-up**

15 min CCT start 3181 K  
2.0% CCT shift +17 K  
15 min CCT end 3198 K

**Warm-up Results**

Total warmup time Lamp stabilized in 15 min 27 sec  
Warmup variation -2.2%

**Output intensity change during warm-up**

Output start 438 lm  
Output change -9 lm  
Output end 429 lm


136-820 Spot | 82x82mm | square | white | 5/7W | 3CCT/DTW

## Colour measurement details


Total lumen output 429 lm  
 Correlated Colour Temperature 3198 K  
 Colour coordinates CIE 1931 (x;y) = (0.420;0.390)  
 Colour deviation from BBL Duv = -0.0030

TM30-18 Colour Fidelity Index  $R_f$  91.5  
 TM30-18 Colour Gamut Index  $R_g$  99.9  
 Colour Rendering Index (Ra) CRI 93.6  
 Colour Rendering Index. (red component)  $R_9 = 57.8$


Colour Quality Scale CQS = 91.2  
 Television Lighting Consistency Index TLCI = 89

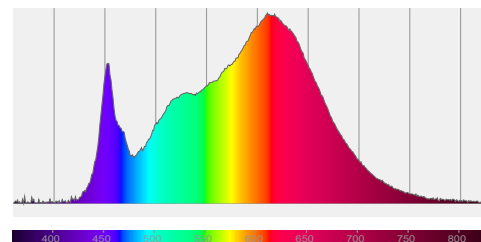

Relative spectral power distribution

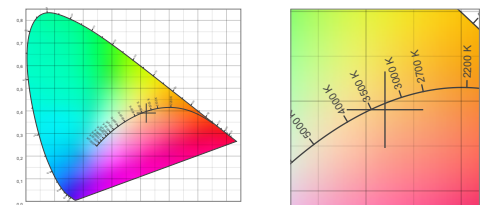

## TM30 details

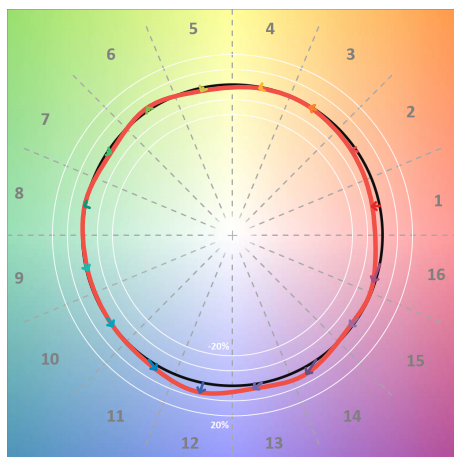


TM30 Colour vectors per hue bin




TM30 Colour distortion


| Hue Bin | $R_f$ | Shifts (%) |      |
|---------|-------|------------|------|
|         |       | Chroma     | Hue  |
| C1      | 91    | -5%        | 1%   |
| C2      | 92    | -3%        | 3%   |
| C3      | 91    | -1%        | 5%   |
| C4      | 95    | -1%        | 1%   |
| C5      | 94    | -2%        | 1%   |
| C6      | 96    | 2%         | 0%   |
| C7      | 93    | -2%        | -1%  |
| C8      | 98    | 0%         | 0%   |
| C9      | 94    | -1%        | 4%   |
| C10     | 90    | 0%         | 6%   |
| C11     | 89    | 3%         | 7%   |
| C12     | 89    | 7%         | -1%  |
| C13     | 91    | 3%         | -6%  |
| C14     | 87    | 4%         | -10% |
| C15     | 88    | -1%        | -7%  |
| C16     | 85    | -2%        | -12% |

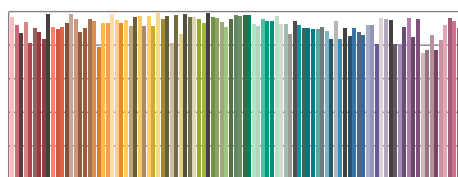

TM30-18  $R_f$ -values per reference colour

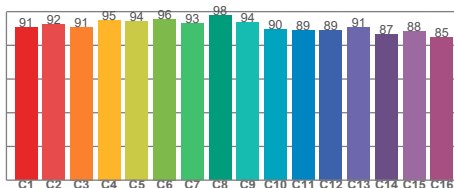


TM30-18  $R_f$ -values per hue bin

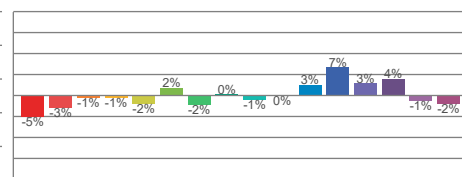


TM30 Chroma shift

## Colour Quality details

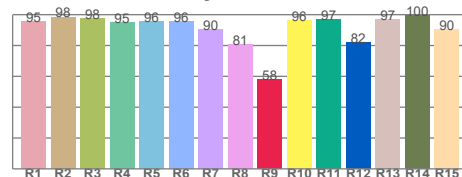

Colour Rendering Index

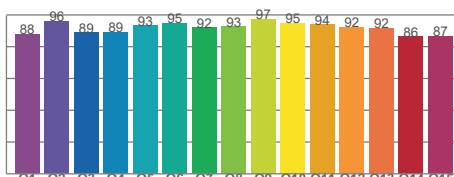

Colour Quality Scale

136-820 Spot | 82x82mm | square | white | 5/7W | 3CCT/DTW

## Flicker / temporal light artefacts details

### Measurement conditions

|                         |                                                                      |
|-------------------------|----------------------------------------------------------------------|
| Flicker meter type      | Viso Systems LabFlicker                                              |
| Flicker/TLA sample rate | 20000 samples/s                                                      |
| Measurement time        | 5x 180 seconds (15 minutes) for PstLM. 1.2 sec for all other indices |

### Flicker indices according to Illuminating Engineering Society (IES)


|                   |        |
|-------------------|--------|
| Flicker frequency | 100 Hz |
| Percent flicker   | 0.5 %  |
| Flicker index     | 0      |

### TLA indices (according IEC TR 61547-1, EN 61000-3-3 and EN 61000-4-15)


An LED luminaire is considered flicker-free if the SVM value is  $\leq 0.4$  and if the PstLM value is  $\leq 1.0$

|                                 |      |
|---------------------------------|------|
| PstLM value ( $F < 80$ Hz)      | 0.21 |
| SVM value ( $80 < F < 2000$ Hz) | 0.01 |


### Flicker frame (one flicker period in time domain)

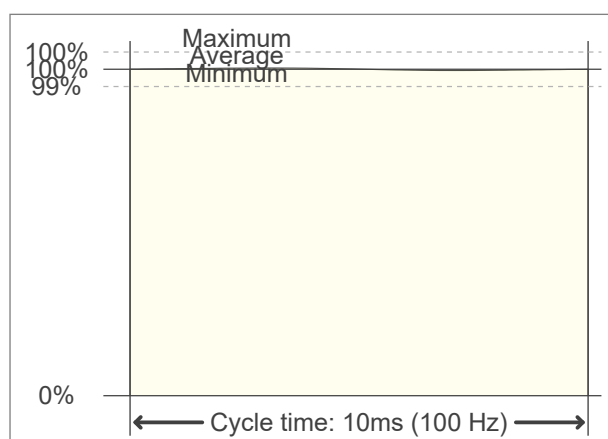

### Flicker FFT (flicker curve in frequency domain)

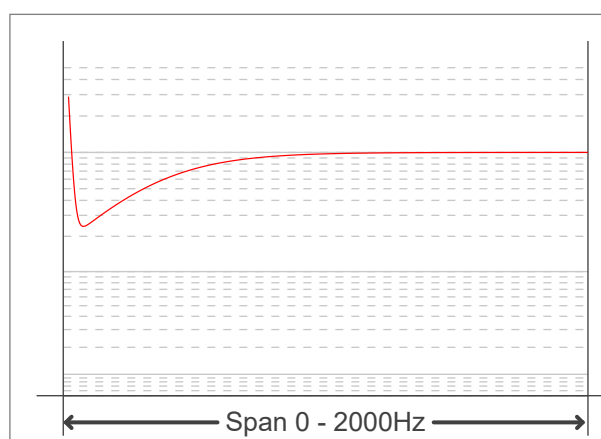

### IEEE 1789-2015 Lighting Flicker Risk Zones

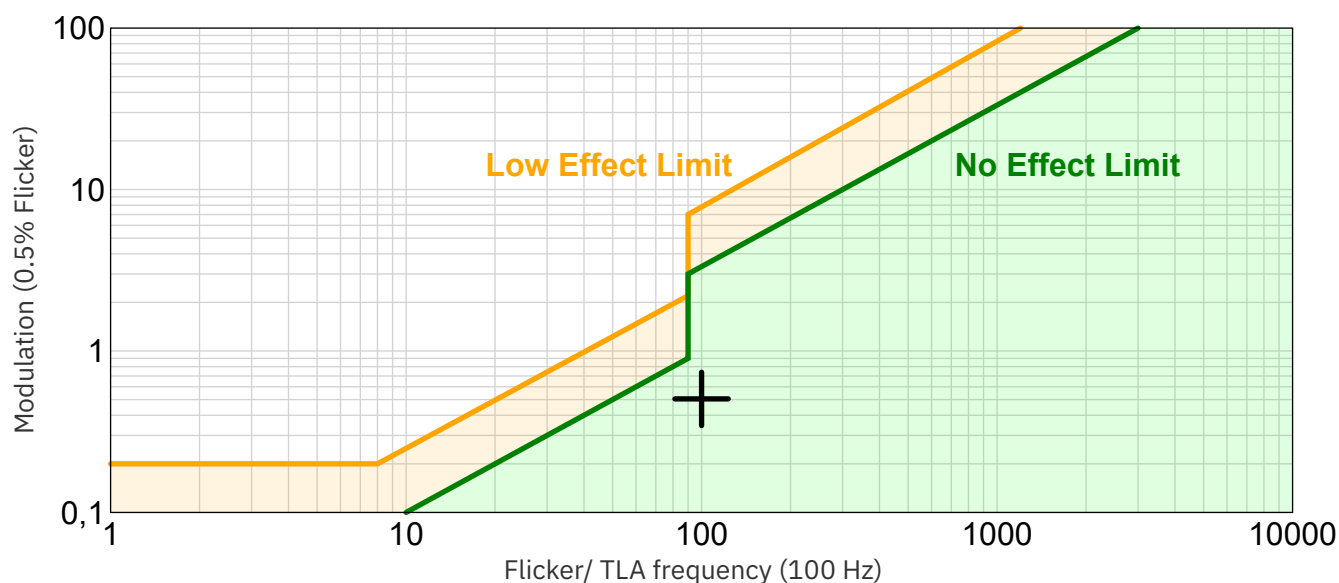


Document revision date: 11-12-2025 Measurement serial: VFR-251124-12345-SW

136-820 Spot | 82x82mm | square | white | 5/7W | 3CCT/DTW

Beam angle

## Luminous Intensity diagram

Unit: 0-100% of peak intensity

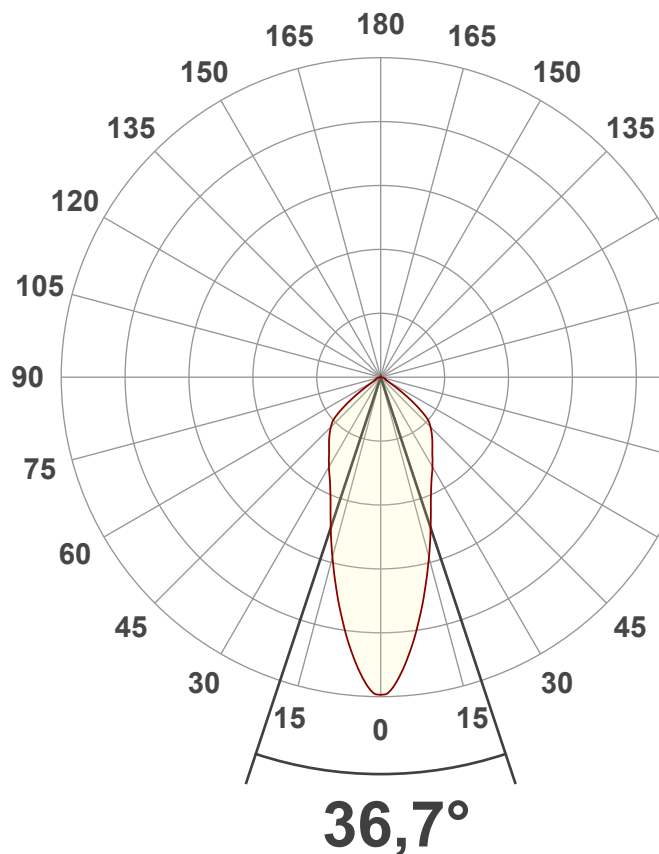

### Main Values

|                      |           |
|----------------------|-----------|
| Output (total Lumen) | 429 lm    |
| Lumen Up/Down        | 0% / 100% |
| Peak Intensity       | 490 cd    |
| Beam Angle (50%)     | 36.7°     |
| Beam Angle (90%)     | 36.7°     |
| Beam Angle (10%)     | 36.7°     |

### Cut-off Angle

|              |        |
|--------------|--------|
| Average 2.5% | 120.5° |
|--------------|--------|

### Field Angle

|             |        |
|-------------|--------|
| Average 10% | 107.6° |
|-------------|--------|


### Intensity Ratio

|              |       |
|--------------|-------|
| In 120° cone | 96.2% |
| In 90° cone  | 78.3% |

### C planes

|           |
|-----------|
| C000-C180 |
| C090-C270 |


## Linear distribution diagram - Intensity (candela) vs γ-angle

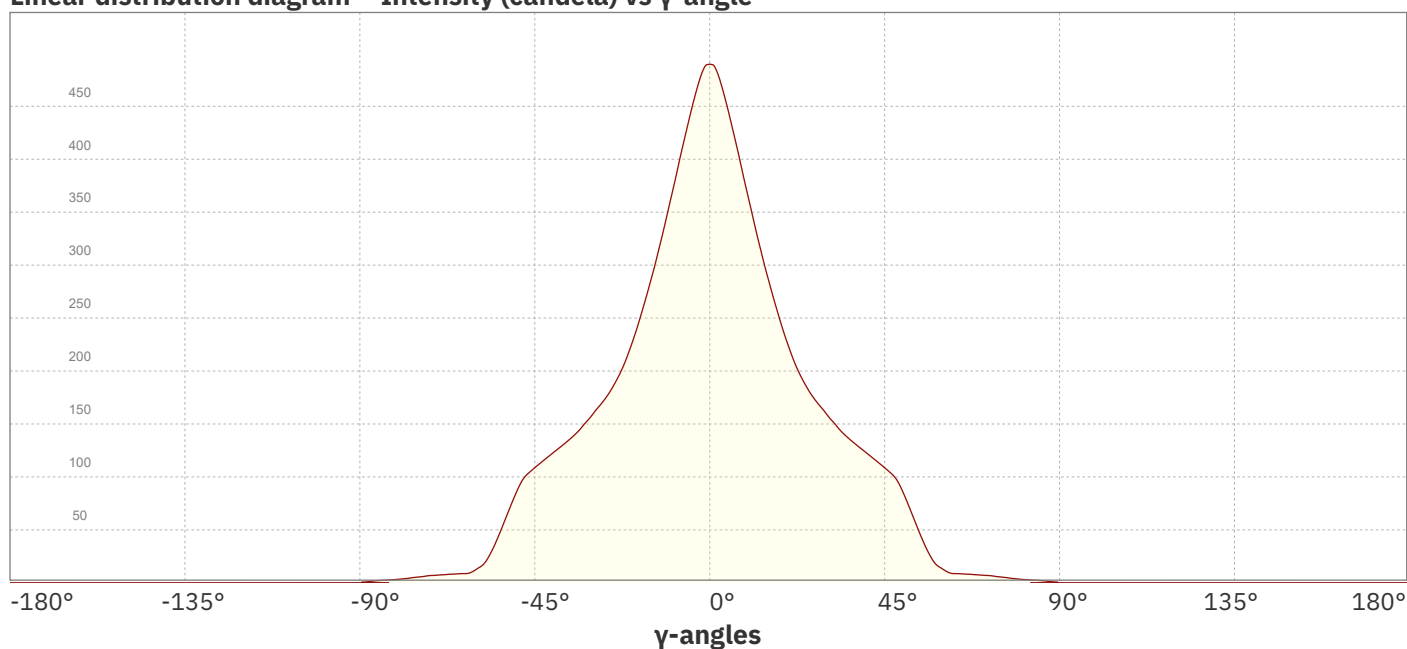

Document revision date: 11-12-2025 Measurement serial: VFR-251124-12345-SW

136-820 Spot | 82x82mm | square | white | 5/7W | 3CCT/DTW

## Beam Details

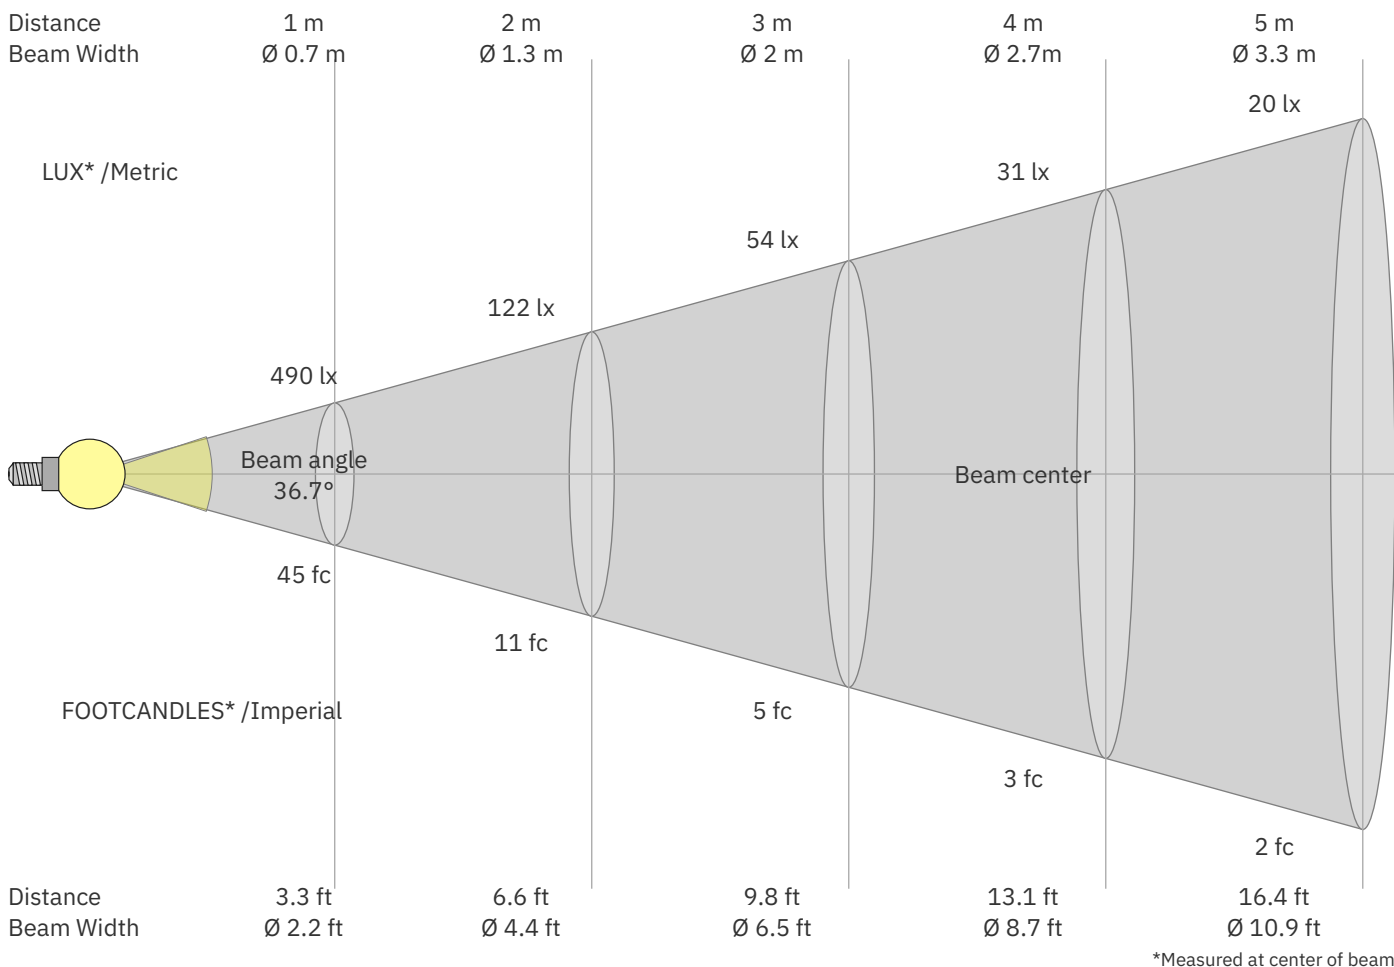

### Beam intensities from 1 – 20 m

| 1    | 2    | 3   | 4    | 5    | 6    | 7   | 8    | 9    | 10   | 11   | 12   | 13   | 14   | 15   | 16   | 17   | 18   | 19   | 20   | m   |
|------|------|-----|------|------|------|-----|------|------|------|------|------|------|------|------|------|------|------|------|------|-----|
| 3.3  | 6.6  | 9.8 | 13.1 | 16.4 | 19.7 | 23  | 26.2 | 29.5 | 32.8 | 36.1 | 39.4 | 42.7 | 45.9 | 49.2 | 52.5 | 55.8 | 59.1 | 62.3 | 65.6 | ft  |
| 490  | 122  | 54  | 31   | 20   | 14   | 10  | 8    | 6    | 5    | 4    | 3    | 3    | 2    | 2    | 2    | 2    | 2    | 1    | 1    | lux |
| 45.5 | 11.4 | 5.1 | 2.8  | 1.8  | 1.3  | 0.9 | 0.7  | 0.6  | 0.5  | 0.4  | 0.3  | 0.3  | 0.2  | 0.2  | 0.2  | 0.2  | 0.1  | 0.1  | 0.1  | fc  |

### Intensities in 0° c-plane

| 0°   | 5°  | 10° | 15° | 20° | 25° | 30° | 35° | 40° | 45° | 50° | 55° | 60° | 65° | 70° | 75° | 80° | 85° | 90° | 95° | γ        |
|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----------|
| 490  | 442 | 363 | 288 | 226 | 185 | 160 | 139 | 124 | 109 | 83  | 38  | 13  | 8   | 7   | 5   | 3   | 2   | 0   | 0   | cd       |
| 100% | 90% | 74% | 59% | 46% | 38% | 33% | 28% | 25% | 22% | 17% | 8%  | 3%  | 2%  | 1%  | 1%  | 1%  | 0%  | 0%  | 0%  | of 0°val |

### Intensities in 90° c-plane

| 0°   | 5°  | 10° | 15° | 20° | 25° | 30° | 35° | 40° | 45° | 50° | 55° | 60° | 65° | 70° | 75° | 80° | 85° | 90° | 95° | γ        |
|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----------|
| 490  | 442 | 363 | 288 | 226 | 185 | 160 | 139 | 124 | 109 | 83  | 38  | 13  | 8   | 7   | 5   | 3   | 2   | 0   | 0   | cd       |
| 100% | 90% | 74% | 59% | 46% | 38% | 33% | 28% | 25% | 22% | 17% | 8%  | 3%  | 2%  | 1%  | 1%  | 1%  | 0%  | 0%  | 0%  | of 0°val |

### Intensities in 180° c-plane

| 0°   | 5°  | 10° | 15° | 20° | 25° | 30° | 35° | 40° | 45° | 50° | 55° | 60° | 65° | 70° | 75° | 80° | 85° | 90° | 95° | γ        |
|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----------|
| 490  | 442 | 363 | 288 | 226 | 185 | 160 | 139 | 124 | 109 | 83  | 38  | 13  | 8   | 7   | 5   | 3   | 2   | 0   | 0   | cd       |
| 100% | 90% | 74% | 59% | 46% | 38% | 33% | 28% | 25% | 22% | 17% | 8%  | 3%  | 2%  | 1%  | 1%  | 1%  | 0%  | 0%  | 0%  | of 0°val |

### Intensities in 270° c-plane

| 0°   | 5°  | 10° | 15° | 20° | 25° | 30° | 35° | 40° | 45° | 50° | 55° | 60° | 65° | 70° | 75° | 80° | 85° | 90° | 95° | γ        |
|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----------|
| 490  | 442 | 363 | 288 | 226 | 185 | 160 | 139 | 124 | 109 | 83  | 38  | 13  | 8   | 7   | 5   | 3   | 2   | 0   | 0   | cd       |
| 100% | 90% | 74% | 59% | 46% | 38% | 33% | 28% | 25% | 22% | 17% | 8%  | 3%  | 2%  | 1%  | 1%  | 1%  | 0%  | 0%  | 0%  | of 0°val |

Document revision date: 11-12-2025 Measurement serial: VFR-251124-12345-SW



136-820 Spot | 82x82mm | square | white | 5/7W | 3CCT/DTW

## Light Planning – UGR table

Uncorrected, comprehensive UGR table according to CIE 117-1995

| Reflectances                                                         |     | 70                                                 | 70   | 50         | 50   | 30   | 70                                               | 70         | 50   | 50   | 30   |
|----------------------------------------------------------------------|-----|----------------------------------------------------|------|------------|------|------|--------------------------------------------------|------------|------|------|------|
| ρ Ceiling                                                            |     | 70                                                 | 70   | 50         | 50   | 30   | 70                                               | 70         | 50   | 50   | 30   |
| ρ Walls                                                              |     | 50                                                 | 30   | 50         | 30   | 30   | 50                                               | 30         | 50   | 30   | 30   |
| ρ Floor                                                              |     | 20                                                 | 20   | 20         | 20   | 20   | 20                                               | 20         | 20   | 20   | 20   |
| Room size                                                            |     | Viewed Crosswise                                   |      |            |      |      | Viewed Endwise                                   |            |      |      |      |
| H = mounting height above eye level                                  |     | (Viewing direction orthogonal to lamp length axis) |      |            |      |      | (Viewing direction parallel to lamp length axis) |            |      |      |      |
| X                                                                    | Y   |                                                    |      |            |      |      |                                                  |            |      |      |      |
| 2H                                                                   | 2H  | 26.3                                               | 27.2 | 26.5       | 27.4 | 27.6 | 26.3                                             | 27.2       | 26.5 | 27.4 | 27.6 |
|                                                                      | 3H  | 26.2                                               | 27.1 | 26.6       | 27.4 | 27.5 | 26.2                                             | 27.1       | 26.6 | 27.4 | 27.5 |
|                                                                      | 4H  | 26.2                                               | 27.1 | 26.6       | 27.4 | 27.6 | 26.2                                             | 27.1       | 26.6 | 27.4 | 27.6 |
|                                                                      | 6H  | 26.3                                               | 27.1 | 26.6       | 27.4 | 27.7 | 26.3                                             | 27.1       | 26.6 | 27.4 | 27.7 |
|                                                                      | 8H  | 26.3                                               | 27.0 | 26.6       | 27.4 | 27.7 | 26.3                                             | 27.0       | 26.6 | 27.4 | 27.7 |
|                                                                      | 12H | 26.3                                               | 27.0 | 26.6       | 27.4 | 27.8 | 26.3                                             | 27.0       | 26.6 | 27.4 | 27.8 |
| 4H                                                                   | 2H  | 26.1                                               | 27.0 | 26.5       | 27.2 | 27.5 | 26.1                                             | 27.0       | 26.5 | 27.2 | 27.5 |
|                                                                      | 3H  | 26.2                                               | 26.9 | 26.6       | 27.3 | 27.7 | 26.2                                             | 26.9       | 26.6 | 27.3 | 27.7 |
|                                                                      | 4H  | 26.2                                               | 26.9 | 26.6       | 27.3 | 27.8 | 26.2                                             | 26.9       | 26.6 | 27.3 | 27.8 |
|                                                                      | 6H  | 26.3                                               | 27.0 | 26.8       | 27.3 | 27.7 | 26.3                                             | 27.0       | 26.8 | 27.3 | 27.7 |
|                                                                      | 8H  | 26.3                                               | 26.9 | 26.8       | 27.3 | 27.7 | 26.3                                             | 26.9       | 26.8 | 27.3 | 27.7 |
|                                                                      | 12H | 26.3                                               | 26.8 | 26.8       | 27.3 | 27.7 | 26.3                                             | 26.8       | 26.8 | 27.3 | 27.7 |
| 8H                                                                   | 4H  | 26.2                                               | 26.8 | 26.7       | 27.1 | 27.5 | 26.2                                             | 26.8       | 26.7 | 27.1 | 27.5 |
|                                                                      | 6H  | 26.3                                               | 26.8 | 26.8       | 27.2 | 27.8 | 26.3                                             | 26.8       | 26.8 | 27.2 | 27.8 |
|                                                                      | 8H  | 26.4                                               | 26.8 | 27.0       | 27.3 | 27.9 | 26.4                                             | 26.8       | 27.0 | 27.3 | 27.9 |
|                                                                      | 12H | 26.5                                               | 26.8 | 27.1       | 27.3 | 27.9 | 26.5                                             | 26.8       | 27.1 | 27.3 | 27.9 |
| 12H                                                                  | 4H  | 26.1                                               | 26.6 | 26.6       | 27.0 | 27.5 | 26.1                                             | 26.6       | 26.6 | 27.0 | 27.5 |
|                                                                      | 6H  | 26.4                                               | 26.7 | 26.9       | 27.2 | 27.9 | 26.4                                             | 26.7       | 26.9 | 27.2 | 27.9 |
|                                                                      | 8H  | 26.4                                               | 26.7 | 27.0       | 27.2 | 27.8 | 26.4                                             | 26.7       | 27.0 | 27.2 | 27.8 |
| Variations with the observer position for the luminaire spacings. S: |     |                                                    |      |            |      |      |                                                  |            |      |      |      |
| S = 1.0H                                                             |     |                                                    |      | 0.9 / -1.8 |      |      |                                                  | 0.9 / -1.8 |      |      |      |
| S = 1.5H                                                             |     |                                                    |      | 2.5 / -4.0 |      |      |                                                  | 2.5 / -4.0 |      |      |      |
| S = 2.0H                                                             |     |                                                    |      | 4.1 / -4.3 |      |      |                                                  | 4.1 / -4.3 |      |      |      |

## Coefficients of Utilization

| Ceiling reflectance | 80                       |     |     | 70                                                                             |     |     | 50  |     |     | 30  |     |     | 10  |     |     | 0   |     |     |
|---------------------|--------------------------|-----|-----|--------------------------------------------------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Wall reflectance    | 70                       | 50  | 30  | 10                                                                             | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 0   |
| Floor reflectance   | 20                       | 20  | 20  | 20                                                                             | 20  | 20  | 20  | 20  | 20  | 20  | 20  | 20  | 20  | 20  | 20  | 20  | 20  | 0   |
| RCR                 | (RCR: Room Cavity Ratio) |     |     | Room Values are expressed as percentage of Lumen delivered to the task surface |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 0                   | 119                      | 119 | 119 | 119                                                                            | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |
| 1                   | 112                      | 109 | 106 | 103                                                                            | 109 | 106 | 104 | 101 | 102 | 100 | 98  | 99  | 97  | 95  | 95  | 94  | 92  | 90  |
| 2                   | 105                      | 99  | 94  | 90                                                                             | 102 | 97  | 92  | 89  | 94  | 90  | 87  | 91  | 87  | 85  | 88  | 85  | 83  | 81  |
| 3                   | 98                       | 90  | 84  | 79                                                                             | 96  | 89  | 83  | 78  | 86  | 81  | 77  | 83  | 79  | 76  | 81  | 78  | 75  | 73  |
| 4                   | 92                       | 82  | 76  | 71                                                                             | 90  | 81  | 75  | 70  | 79  | 74  | 69  | 77  | 72  | 68  | 75  | 71  | 68  | 66  |
| 5                   | 86                       | 76  | 69  | 63                                                                             | 84  | 75  | 68  | 63  | 73  | 67  | 63  | 71  | 66  | 62  | 69  | 65  | 61  | 60  |
| 6                   | 81                       | 70  | 63  | 58                                                                             | 79  | 69  | 62  | 57  | 67  | 61  | 57  | 66  | 61  | 56  | 64  | 60  | 56  | 54  |
| 7                   | 76                       | 65  | 58  | 53                                                                             | 74  | 64  | 57  | 52  | 63  | 56  | 52  | 61  | 56  | 52  | 60  | 55  | 51  | 50  |
| 8                   | 71                       | 60  | 53  | 48                                                                             | 70  | 60  | 53  | 48  | 58  | 52  | 48  | 57  | 52  | 48  | 56  | 51  | 47  | 46  |
| 9                   | 67                       | 56  | 49  | 45                                                                             | 66  | 56  | 49  | 45  | 55  | 49  | 44  | 54  | 48  | 44  | 53  | 48  | 44  | 42  |
| 10                  | 64                       | 53  | 46  | 41                                                                             | 63  | 52  | 46  | 41  | 51  | 45  | 41  | 50  | 45  | 41  | 50  | 45  | 41  | 39  |