



PHOTOMETRIC LIGHT REPORT

**T48/20 | pendant |
Ø35mm | black | 10W |
3000K | 36° | DALI**

Article number: 168-187



Go to the
webshop
of Tronix
Lighting



TRONIX



168-187 T48/20 | pendant | Ø35mm | black | 10W | 3000K | 36° | DALI

Introduction

Purpose of this Document

This document provides accurate and objective photometric data for Tronix Lighting item 168-187. All information is based on actual measurements taken from standard production units. No modifications were made to enhance performance results. In some cases, minor adjustments—such as temporary removal of covers, cables, or mounting features—were necessary for testing purposes. These did not influence product performance.

Test Methodology

Testing was conducted using randomly selected, unopened samples from regular inventory. All tests comply with the LM-79-19 standard, the recognized method for photometric and electrical measurements of LED and OLED luminaires. This standard, an update of IES LM-79-2008, outlines environmental test conditions, stabilization procedures, measurement methods, and approved instruments. It uses absolute photometry, meaning results directly reflect the performance of the tested product, without comparison to rated lamp standards.

Product 168-187 was tested using:

- A photogoniometer to measure luminous intensity distribution at various angles
- An integrating sphere to determine total luminous flux and colour characteristics

Compliance & Certification

Item 168-187 meets the requirements of the following EU directives. Tronix Lighting certifies that all relevant tests were executed in accordance with the applicable standards, and the CE mark is applied accordingly:

- General Product Safety – Directive 2023/988/EC
- Low Voltage Directive (LVD) – Directive 2014/35/EU
- Electromagnetic Compatibility (EMC) – Directive 2004/108/EC
- Ecodesign – Directive 2009/125/EC
- RoHS 3 – Directive 2011/65/EU + Amendment 2015/863/EU

Recycling & Sustainability

Tronix Lighting is affiliated with national recycling systems for electrical and electronic waste. The luminaire is over 90% recyclable when disposed of as electronic waste at end of life. In addition, Tronix Lighting participates in national packaging recycling schemes, ensuring full compliance with both the WEEE and packaging directives.

168-187 T48/20 | pendant | Ø35mm | black | 10W | 3000K | 36° | DALI

Laboratory and equipment

Laboratory owner and location
Gonio spectrometer system and type
Spectrometer manufacturer and model

Flicker meter manufacturer and model
Oscilloscope manufacturer and model
Power meter manufacturer and model

Power source manufacturer and model

Datalogger Manufacturer and Model

Tronix Lighting BV. Uden. The Netherlands
Viso Systems Type C. horizontal
(Gonio) Ocean Optics STS VIS
(Sphere) Admesy HERA VIS 380–780nm
Viso Systems LabFlicker
Tektronix MDO3024 oscilloscope (4 Channels. 200 MHz)
Vitrex PA900 Precision Multi-Channel Harmonic Power Analyzer
(DC) Keithley Source Measure Unit SMU-2420 3A DC Source Meter
(AC) Chroma 61601 AC Source
Omega 8-Channel Thermocouple Thermometer/Data Logger

Measurement conditions gonio spectrometer

Number of C-planes and Resolution
 γ (gamma)-Resolution
Test Distance
Room Temperature and Humidity
Input Power. Power and Displacement Factors
Frequency of Input Power
Warm-up Time and Variation

2 planes – 180°
1°
1.81 m
22°C +/- 10% – RH 50% +/- 20%
9.9 W – PF 1.0 – DPF 1.0
0 Hz
Lamp stabilized in 15 min 8 sec --2.0%

Tested light source

Manufacturer and Order Code
Product Description

Tronix Lighting – 168-187
T48/20 | pendant | Ø35mm | black | 10W | 3000K | 36° | DALI

Main Light Measurement Results

Output – Total Lumen (Up% / Down%)
Efficiency
Energy efficiency class
Peak Intensity and Beam Angle
Correlated Colour Temperature
Colour Shift. CIE duv
Colour Rendering Index
Colour Rendering TM30-18
Television Lighting Consistency Index
Flicker

765 lm – 0% / 100%
77 lm/W
G
2750 cd – 29.3°
CCT = 3046 K
 Duv -0.0030
CRI 93.4
 R_f 89.6 – R_g 105.0
TLCI = 87
SVM n/a – PstLM n/a

168-187 T48/20 | pendant | Ø35mm | black | 10W | 3000K | 36° | DALI

Electrical measurement details

Input Power


RMS Input voltage feed. V_{RMS} 48.0 V
 RMS Input current feed. I_{RMS} 0.206 A
 Total input power 9.9 W

Frequency of input power 0 Hz
 Power factor 1.0
 Displacement power factor 1.0

Total harmonic distortion of the current 0%
 Total harmonic distortion of the voltage 0%

Input Power Curve

Voltage - Current



Efficiency

Radiated power efficiency: 28.2%




Lumen efficiency: 77 lm/W



Harmonics

3rd Harmonic n/a
 5th Harmonic n/a
 7th Harmonic n/a
 9th Harmonic n/a
 11th Harmonic n/a

Current Harmonics %

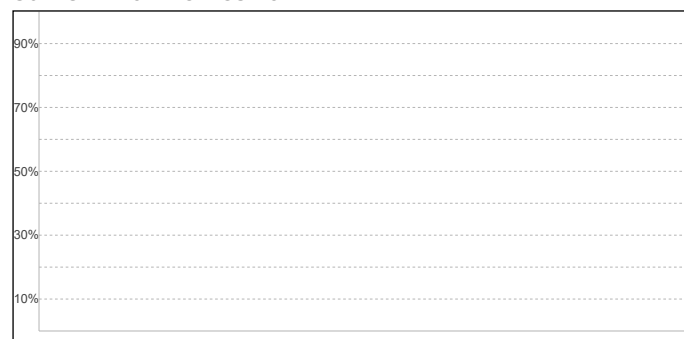

Stabilization Details

Warm-up Conditions

Stable period	15 min	CCT start	3062 K
Stable change max	2.0%	CCT shift	-16 K
Minimum warm-up time	15 min	CCT end	3046 K

Colour temperature change during warm-up

Warm-up Results

Total warmup time	Lamp stabilized in 15 min 8 sec	Output start	780 lm
Warmup variation	-2.0%	Output change	-15 lm
		Output end	765 lm

Output intensity change during warm-up


168-187 T48/20 | pendant | Ø35mm | black | 10W | 3000K | 36° | DALI

Colour measurement details


Total lumen output 765 lm
 Correlated Colour Temperature 3046 K
 Colour coordinates CIE 1931 (x;y) = (0.430;0.394)
 Colour deviation from BBL Duv = -0.0030

TM30-18 Colour Fidelity Index R_f 89.6
 TM30-18 Colour Gamut Index R_g 105.0
 Colour Rendering Index (Ra) CRI 93.4
 Colour Rendering Index. (red component) $R_9 = 79.0$


Colour Quality Scale CQS = 89.5
 Television Lighting Consistency Index TLCI = 87

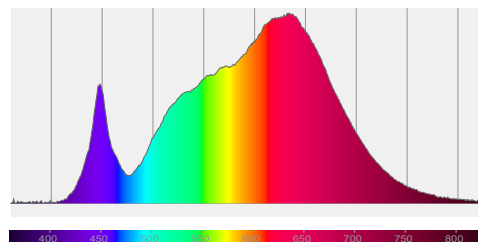


Relative spectral power distribution

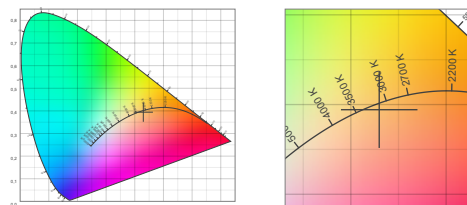

TM30 details

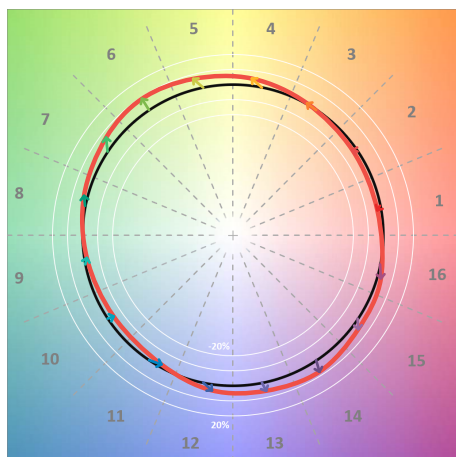


TM30 Colour vectors per hue bin

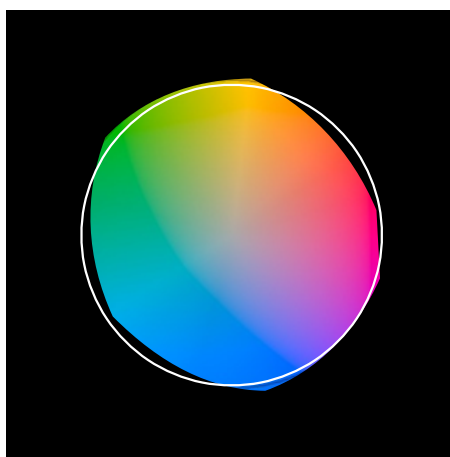


TM30 Colour distortion


Hue Bin	R_f	Shifts (%)	
		Chroma	Hue
C1	93	-2%	-3%
C2	94	-2%	3%
C3	86	0%	7%
C4	86	5%	8%
C5	89	7%	5%
C6	87	9%	0%
C7	86	6%	-7%
C8	90	2%	-6%
C9	93	-2%	-4%
C10	91	-4%	1%
C11	87	-2%	8%
C12	87	4%	7%
C13	92	6%	2%
C14	90	8%	-2%
C15	89	4%	-6%
C16	89	2%	-9%

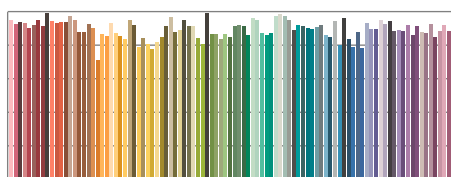

TM30-18 R_f -values per reference colour

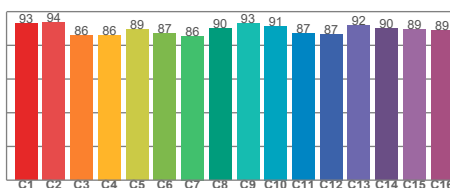


TM30-18 R_f -values per hue bin

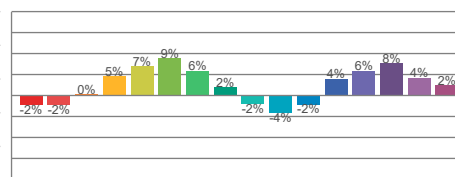


TM30 Chroma shift

Colour Quality details

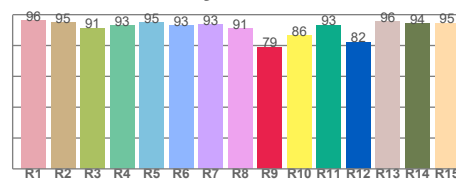

Colour Rendering Index

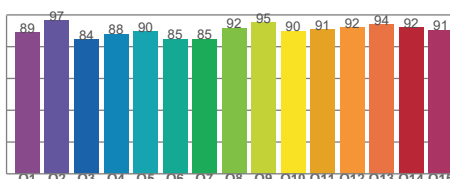

Colour Quality Scale

168-187 T48/20 | pendant | Ø35mm | black | 10W | 3000K | 36° | DALI

Flicker / temporal light artefacts details

Measurement conditions

Flicker meter type	Viso Systems LabFlicker
Flicker/TLA sample rate	n/a samples/s
Measurement time	5x 180 seconds (15 minutes) for PstLM. 1.2 sec for all other indices

Flicker indices according to Illuminating Engineering Society (IES)


Flicker frequency	n/a Hz
Percent flicker	n/a %
Flicker index	n/a

TLA indices (according IEC TR 61547-1, EN 61000-3-3 and EN 61000-4-15)


An LED luminaire is considered flicker-free if the SVM value is ≤ 0.4 and if the PstLM value is ≤ 1.0

PstLM value ($F < 80$ Hz)	n/a
SVM value ($80 < F < 2000$ Hz)	n/a


Flicker frame (one flicker period in time domain)

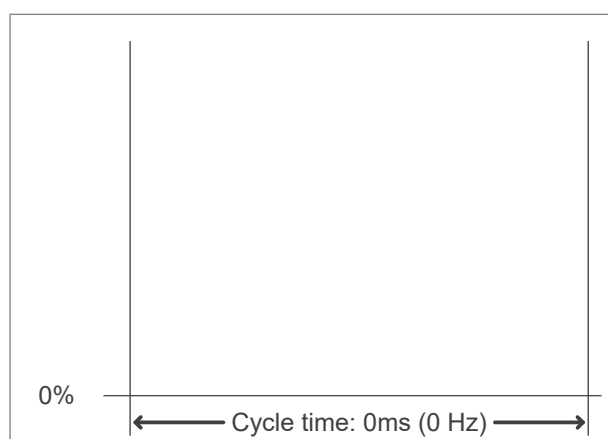

Flicker FFT (flicker curve in frequency domain)

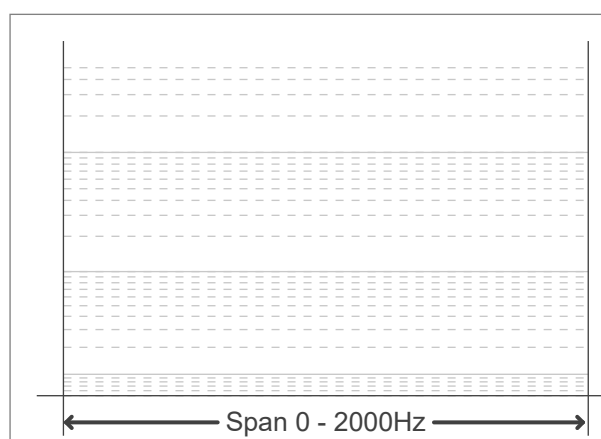


IEEE 1789-2015 Lighting Flicker Risk Zones

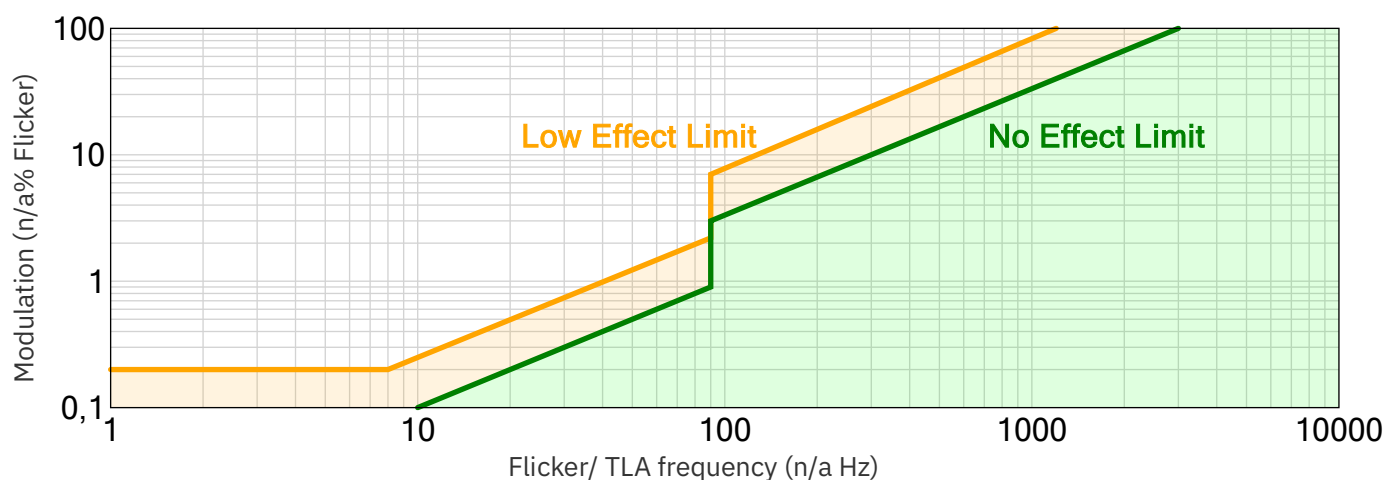

168-187 T48/20 | pendant | Ø35mm | black | 10W | 3000K | 36° | DALI

Beam angle

Luminous Intensity diagram

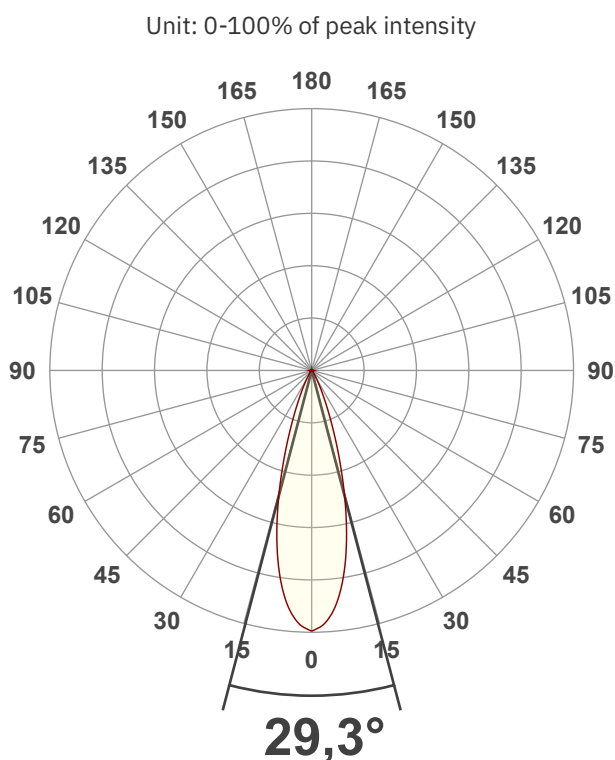

Main Values

Output (total Lumen)	765 lm
Lumen Up/Down	0% / 100%
Peak Intensity	2750 cd
Beam Angle (50%)	29.3°
Beam Angle (90%)	29.3°
Beam Angle (10%)	29.3°

Cut-off Angle

Average 2.5%	65.3°
--------------	-------

Field Angle

Average 10%	49.9°
-------------	-------


Intensity Ratio

In 120° cone	99.6%
In 90° cone	99.0%

C planes


C000-C180
C090-C270

Linear distribution diagram - Intensity (candela) vs γ-angle

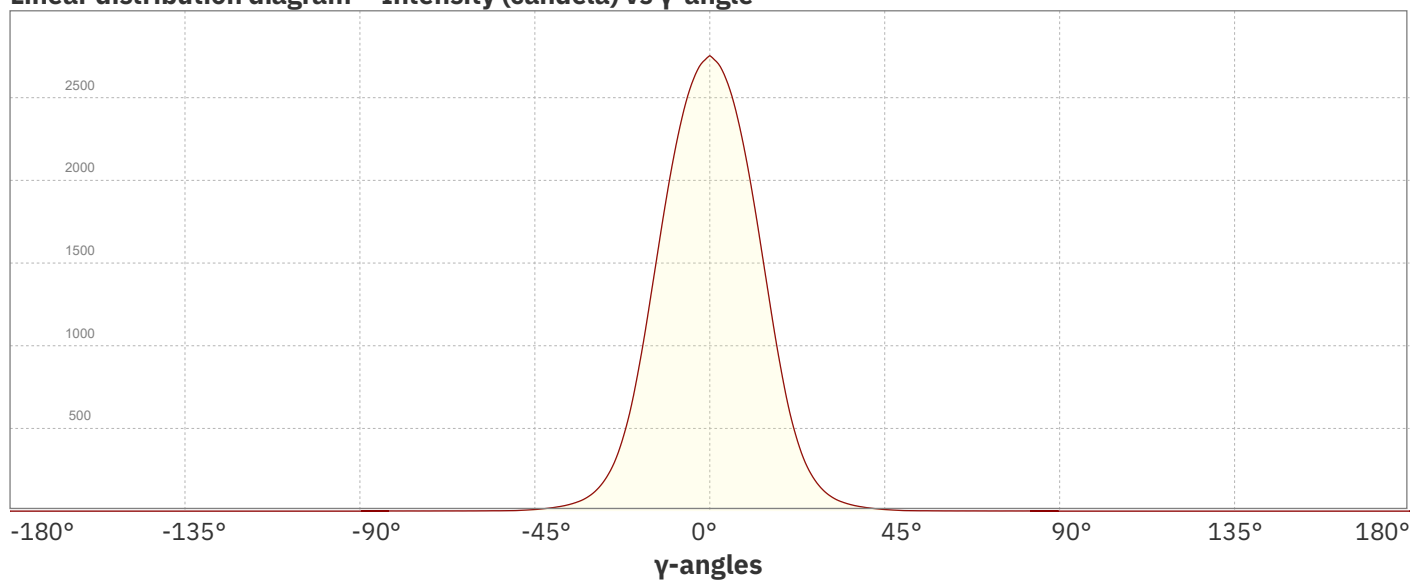

168-187 T48/20 | pendant | Ø35mm | black | 10W | 3000K | 36° | DALI

Beam Details

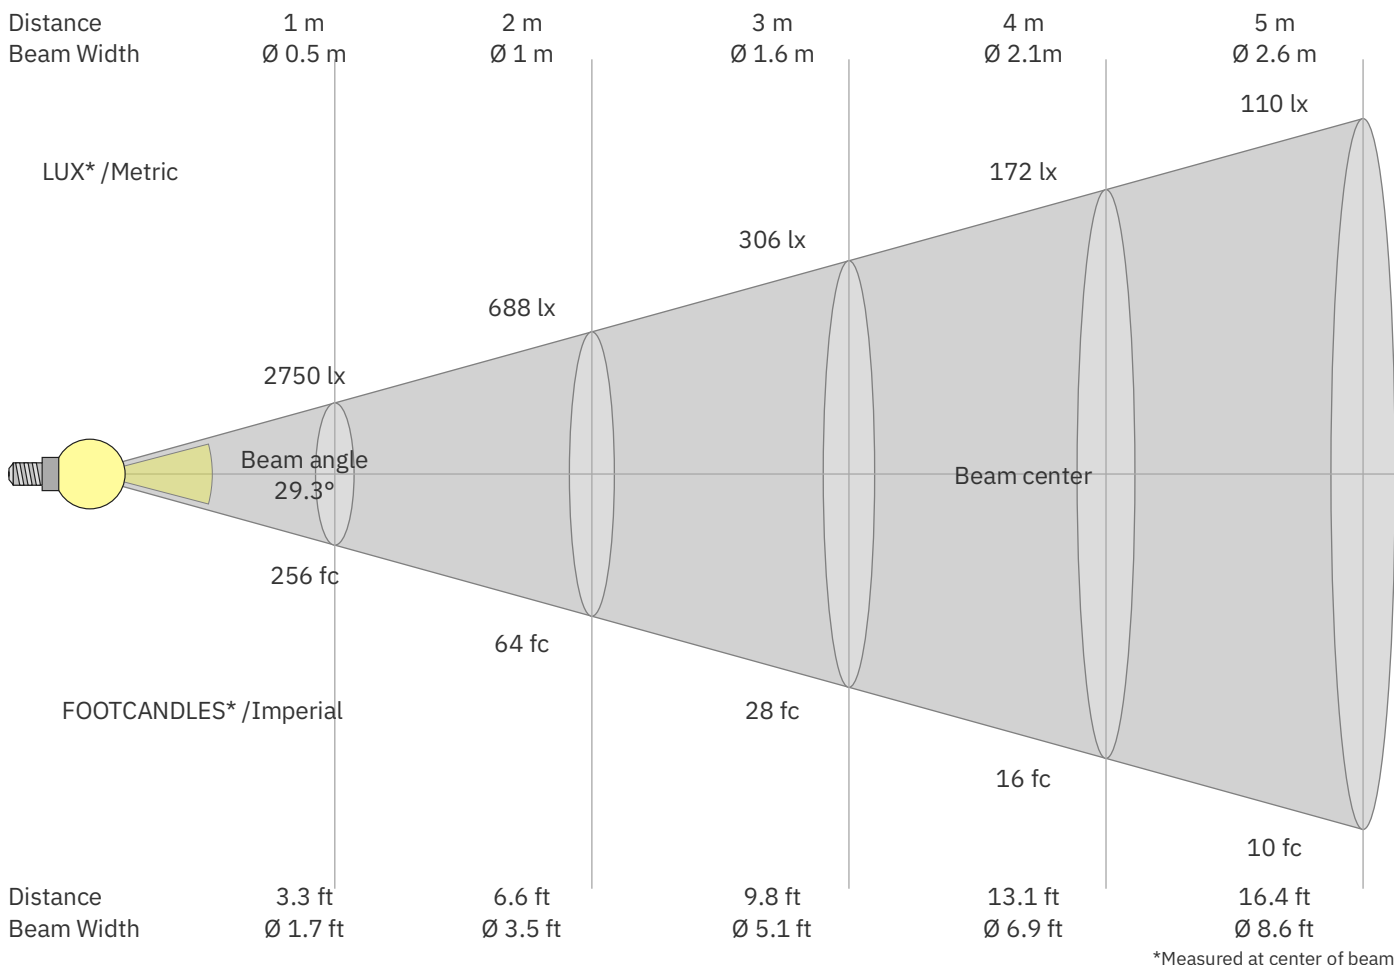

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6	ft
2750	688	306	172	110	76	56	43	34	28	23	19	16	14	12	11	10	8	8	7	lux
255.5	63.9	28.4	16	10.2	7.1	5.2	4	3.2	2.6	2.1	1.8	1.5	1.3	1.1	1	0.9	0.8	0.7	0.6	fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
2750	2710	2622	2482	2288	2049	1773	1474	1176	898	656	469	326	226	157	109	77	56	41	30	cd
100%	99%	95%	90%	83%	74%	64%	54%	43%	33%	24%	17%	12%	8%	6%	4%	3%	2%	1%	1%	of 0°val

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
2750	2710	2622	2482	2288	2049	1773	1474	1176	898	656	469	326	226	157	109	77	56	41	30	cd
100%	99%	95%	90%	83%	74%	64%	54%	43%	33%	24%	17%	12%	8%	6%	4%	3%	2%	1%	1%	of 0°val

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
2750	2710	2622	2482	2288	2049	1773	1474	1176	898	656	469	326	226	157	109	77	56	41	30	cd
100%	99%	95%	90%	83%	74%	64%	54%	43%	33%	24%	17%	12%	8%	6%	4%	3%	2%	1%	1%	of 0°val

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
2750	2710	2622	2482	2288	2049	1773	1474	1176	898	656	469	326	226	157	109	77	56	41	30	cd
100%	99%	95%	90%	83%	74%	64%	54%	43%	33%	24%	17%	12%	8%	6%	4%	3%	2%	1%	1%	of 0°val

Document revision date: 28-7-2026 Measurement serial: VFR-251209-12569-SW

168-187 T48/20 | pendant | Ø35mm | black | 10W | 3000K | 36° | DALI

Light Planning – UGR table

Uncorrected, comprehensive UGR table according to CIE 117-1995

Reflectances		70	70	50	50	30	70	70	50	50	30
ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room size		Viewed Crosswise					Viewed Endwise				
H = mounting height above eye level		(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
X	Y										
2H	2H	15.2	15.6	15.2	15.8	16.0	15.2	15.6	15.2	15.8	16.0
	3H	15.0	15.6	15.3	15.7	15.9	15.0	15.6	15.3	15.7	15.9
	4H	15.0	15.6	15.4	15.8	16.0	15.0	15.6	15.4	15.8	16.0
	6H	15.2	15.6	15.5	15.9	16.3	15.2	15.6	15.5	15.9	16.3
	8H	15.3	15.8	15.6	16.1	16.5	15.3	15.8	15.6	16.1	16.5
12H	12H	15.6	16.0	15.9	16.4	16.8	15.6	16.0	15.9	16.4	16.8
4H	2H	14.8	15.4	15.2	15.6	15.8	14.8	15.4	15.2	15.6	15.8
	3H	14.9	15.3	15.2	15.7	16.1	14.9	15.3	15.2	15.7	16.1
	4H	14.9	15.3	15.3	15.8	16.3	14.9	15.3	15.3	15.8	16.3
	6H	15.2	15.6	15.7	16.0	16.3	15.2	15.6	15.7	16.0	16.3
	8H	15.4	15.8	15.9	16.2	16.5	15.4	15.8	15.9	16.2	16.5
12H	12H	15.9	16.2	16.4	16.6	17.1	15.9	16.2	16.4	16.6	17.1
8H	4H	14.9	15.3	15.4	15.7	16.0	14.9	15.3	15.4	15.7	16.0
	6H	15.3	15.6	15.8	16.0	16.6	15.3	15.6	15.8	16.0	16.6
	8H	15.8	16.0	16.3	16.5	17.1	15.8	16.0	16.3	16.5	17.1
	12H	16.5	16.7	17.1	17.2	17.8	16.5	16.7	17.1	17.2	17.8
12H	4H	14.9	15.2	15.4	15.6	16.1	14.9	15.2	15.4	15.6	16.1
	6H	15.4	15.6	15.9	16.1	16.8	15.4	15.6	15.9	16.1	16.8
	8H	15.9	16.1	16.5	16.6	17.2	15.9	16.1	16.5	16.6	17.2
Variations with the observer position for the luminaire spacings. S:											
S = 1.0H				3.1 / -1.6				3.1 / -1.6			
S = 1.5H				5.3 / -1.7				5.3 / -1.7			
S = 2.0H				7.1 / -2.0				7.1 / -2.0			

Coefficients of Utilization

Ceiling reflectance	80			70			50			30			10			0		
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)																	
	Room Values are expressed as percentage of Lumen delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96
2	111	107	104	101	109	105	103	100	102	100	98	99	98	96	97	95	94	92
3	107	102	98	95	105	101	97	95	98	96	93	96	94	92	94	92	90	89
4	104	98	94	91	102	97	93	90	95	92	89	93	90	88	91	89	87	86
5	100	94	90	87	99	93	89	86	92	88	85	90	87	85	89	86	84	83
6	97	91	86	83	96	90	86	83	88	85	82	87	84	82	86	83	81	80
7	94	87	83	80	93	87	83	80	86	82	79	85	81	79	84	81	79	77
8	91	84	80	77	90	84	80	77	83	79	77	82	79	76	81	78	76	75
9	89	82	77	74	88	81	77	74	80	77	74	80	76	74	79	76	74	73
10	86	79	75	72	85	79	75	72	78	74	72	77	74	72	77	74	72	71