

169-296 2500K 45 degree specific configuration
Track spot | 3-phase | black | 20W | 925-927-930 | 45° | dim

Introduction

Purpose of this Document

This document provides information for 169-296 2500K 45 degree. During measurement, the product is used in a different mode where output power, colour temperature and/or beam angle are changed from factory standard. These adjustments can be made without altering the product and are designed to be set by the installer. In most cases, the options are set through switches on the product.

Results

Total input power	19.7 W
Correlated Colour Temperature	2467 K
Total lumen output	1099 lm
Efficiency	56 lm/W

Electrical measurement details

Input Power


RMS Input voltage feed. V_{RMS}	231 V
RMS Input current feed. I_{RMS}	0.087 A
Total input power	19.7 W

Frequency of input power	50 Hz
Power factor	0.98
Displacement power factor	1.0

Total harmonic distortion of the current	17.33%
Total harmonic distortion of the voltage	3.02%


Input Power Curve

Voltage - Current

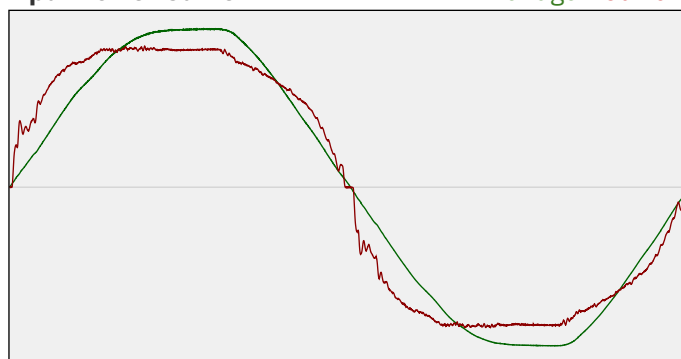

Efficiency

Radiated power efficiency: 20.3%




Lumen efficiency: 56 lm/W



Harmonics

3rd Harmonic	16.07%
5th Harmonic	5.25%
7th Harmonic	2.6%
9th Harmonic	0.53%
11th Harmonic	0.55%

Current Harmonics %

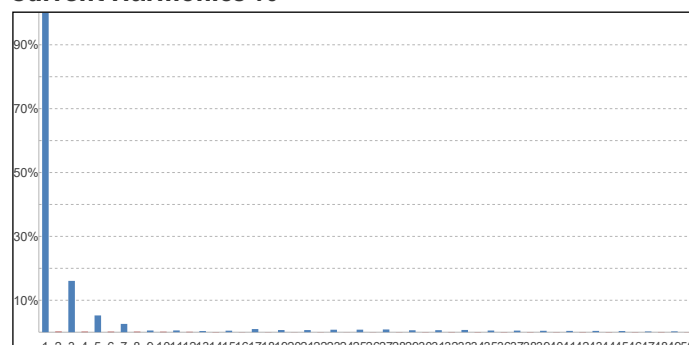


169-296 2500K 45 degree specific configuration

Colour measurement details


Total lumen output 1099 lm
 Correlated Colour Temperature 2467 K
 Colour coordinates CIE 1931 (x;y) = (0.485;0.421)
 Colour deviation from BBL Duv = 0.0022

TM30-18 Colour Fidelity Index R_f 92.6
 TM30-18 Colour Gamut Index R_g 96.7
 Colour Rendering Index (Ra) CRI 94.1
 Colour Rendering Index. (red component) $R_9 = 59.7$


Colour Quality Scale CQS = 89.4
 Television Lighting Consistency Index TLCI = 92

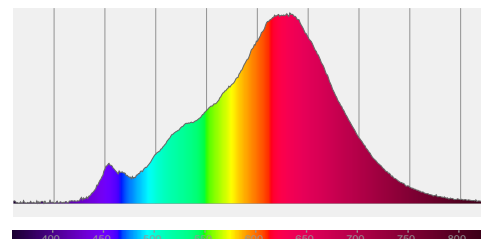

Relative spectral power distribution

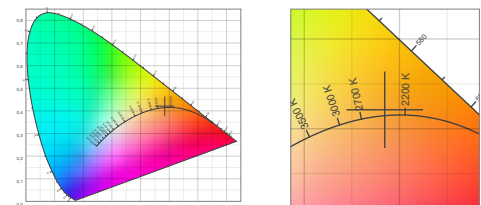

TM30 details

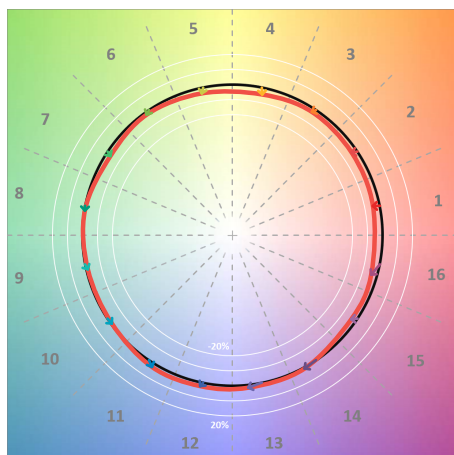


TM30 Colour vectors per hue bin




TM30 Colour distortion


Hue Bin	R_f	Shifts (%)	
		Chroma	Hue
C1	91	-5%	1%
C2	93	-4%	2%
C3	94	-2%	2%
C4	94	-4%	-1%
C5	95	-4%	2%
C6	95	-2%	3%
C7	94	-3%	1%
C8	95	0%	3%
C9	94	-1%	4%
C10	93	-1%	4%
C11	93	3%	4%
C12	92	3%	-1%
C13	90	2%	-9%
C14	87	0%	-9%
C15	93	-3%	-3%
C16	88	-4%	-8%

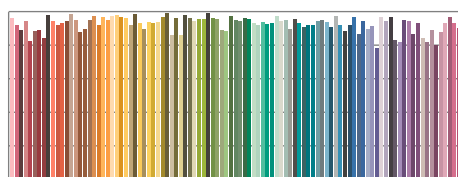

TM30-18 R_f -values per reference colour

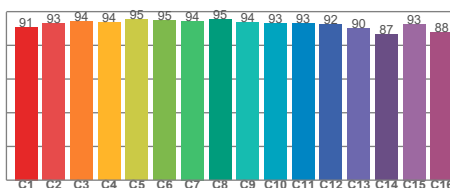


TM30-18 R_f -values per hue bin

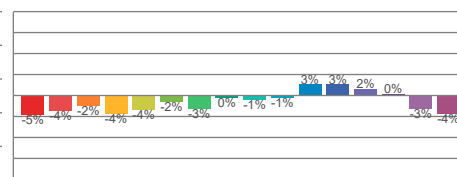


TM30 Chroma shift

Colour Quality details

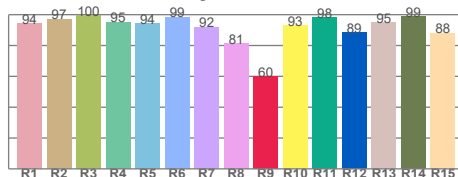

Colour Rendering Index

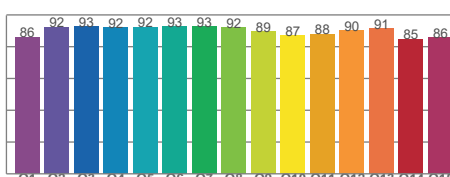

Colour Quality Scale