



PHOTOMETRIC LIGHT REPORT

Track spot | 3-phase | white | 30W | 930-935-940 | 45° | dim

Article number: 169-363



Go to the
webshop
of Tronix
Lighting



TRONIX



169-363 Track spot | 3-phase | white | 30W | 930-935-940 | 45° | dim

Introduction

Purpose of this Document

This document provides accurate and objective photometric data for Tronix Lighting item 169-363. All information is based on actual measurements taken from standard production units. No modifications were made to enhance performance results. In some cases, minor adjustments—such as temporary removal of covers, cables, or mounting features—were necessary for testing purposes. These did not influence product performance.

Test Methodology

Testing was conducted using randomly selected, unopened samples from regular inventory. All tests comply with the LM-79-19 standard, the recognized method for photometric and electrical measurements of LED and OLED luminaires. This standard, an update of IES LM-79-2008, outlines environmental test conditions, stabilization procedures, measurement methods, and approved instruments. It uses absolute photometry, meaning results directly reflect the performance of the tested product, without comparison to rated lamp standards.

Product 169-363 was tested using:

- A photogoniometer to measure luminous intensity distribution at various angles
- An integrating sphere to determine total luminous flux and colour characteristics

Compliance & Certification

Item 169-363 meets the requirements of the following EU directives. Tronix Lighting certifies that all relevant tests were executed in accordance with the applicable standards, and the CE mark is applied accordingly:

- General Product Safety – Directive 2023/988/EC
- Low Voltage Directive (LVD) – Directive 2014/35/EU
- Electromagnetic Compatibility (EMC) – Directive 2004/108/EC
- Ecodesign – Directive 2009/125/EC
- RoHS 3 – Directive 2011/65/EU + Amendment 2015/863/EU

Recycling & Sustainability

Tronix Lighting is affiliated with national recycling systems for electrical and electronic waste. The luminaire is over 90% recyclable when disposed of as electronic waste at end of life. In addition, Tronix Lighting participates in national packaging recycling schemes, ensuring full compliance with both the WEEE and packaging directives.

169-363 Track spot | 3-phase | white | 30W | 930-935-940 | 45° | dim

Laboratory and equipment

Laboratory owner and location	Tronix Lighting BV. Uden. The Netherlands
Gonio spectrometer system and type	Viso Systems Type C. horizontal
Spectrometer manufacturer and model	(Gonio) Ocean Optics STS VIS (Sphere) Admesy HERA VIS 380–780nm
Flicker meter manufacturer and model	Viso Systems LabFlicker
Oscilloscope manufacturer and model	Tektronix MDO3024 oscilloscope (4 Channels. 200 MHz)
Power meter manufacturer and model	Vitretek PA900 Precision Multi-Channel Harmonic Power Analyzer
Power source manufacturer and model	(DC) Keithley Source Measure Unit SMU-2420 3A DC Source Meter (AC) Chroma 61601 AC Source
Datalogger Manufacturer and Model	Omega 8-Channel Thermocouple Thermometer/Data Logger

Measurement conditions gonio spectrometer

Number of C-planes and Resolution	2 planes – 180°
γ (gamma)-Resolution	1°
Test Distance	1.81 m
Room Temperature and Humidity	22°C +/- 10% – RH 50% +/- 20%
Input Power. Power and Displacement Factors	28.4 W – PF 0.96 – DPF 0.97
Frequency of Input Power	50 Hz
Warm-up Time and Variation	n/a – n/a%

Tested light source

Manufacturer and Order Code	Tronix Lighting – 169-363
Product Description	Track spot 3-phase white 30W 930-935-940 45° dim

Main Light Measurement Results

Output – Total Lumen (Up% / Down%)	2416 lm – 0.1% / 99.9%
Efficiency	85 lm/W
Energy efficiency class	F
Peak Intensity and Beam Angle	3842 cd – 47.1°
Correlated Colour Temperature	CCT = 3432 K
Colour Shift. CIE duv	Duv -0.0033
Colour Rendering Index	CRI 94.9
Colour Rendering TM30-18	R _f 91.4 – R _g 101.3
Television Lighting Consistency Index	TLCI = 91
Flicker	SVM 0.02 – PstLM 0.31



169-363
Track spot | 3-phase | white | 30W | 930-935-940 | 45° | dim

Electrical measurement details


Input Power

RMS Input voltage feed. V_{RMS}	230 V
RMS Input current feed. I_{RMS}	0.129 A
Total input power	28.4 W
Frequency of input power	50 Hz
Power factor	0.96
Displacement power factor	0.97


Total harmonic distortion of the current	17.36%
Total harmonic distortion of the voltage	2.58%

Input Power Curve

Voltage - Current

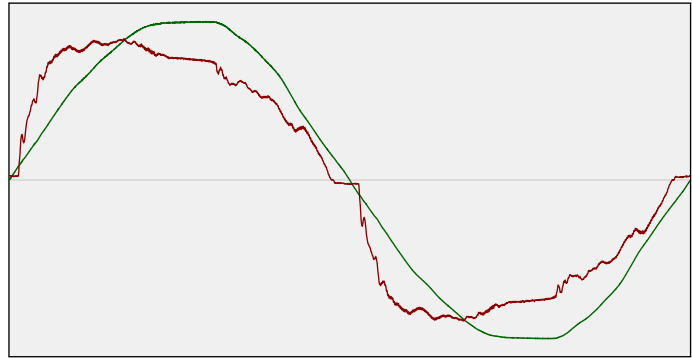


Efficiency



Harmonics

3rd Harmonic	14.77%
5th Harmonic	5.77%
7th Harmonic	3.04%
9th Harmonic	4.27%
11th Harmonic	1.91%

Current Harmonics %

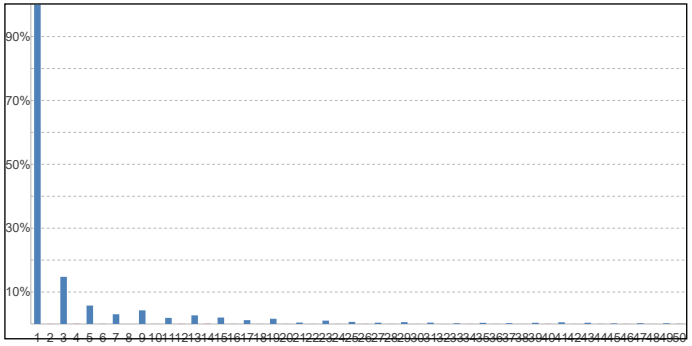

Stabilization Details

Warm-up Conditions

Stable period	n/a	CCT start	n/a K
Stable change max	n/a%	CCT shift	n/a K
Minimum warm-up time	n/a	CCT end	3432 K

Warm-up Results

Total warmup time	n/a	Output start	n/a lm
Warmup variation	n/a%	Output change	n/a lm
		Output end	2416 lm


169-363 Track spot | 3-phase | white | 30W | 930-935-940 | 45° | dim

Colour measurement details


Total lumen output 2416 lm
 Correlated Colour Temperature 3432 K
 Colour coordinates CIE 1931 (x;y) = (0.406;0.383)
 Colour deviation from BBL Duv = -0.0033

TM30-18 Colour Fidelity Index R_f 91.4
 TM30-18 Colour Gamut Index R_g 101.3
 Colour Rendering Index (Ra) CRI 94.9
 Colour Rendering Index. (red component) $R_9 = 72.0$


Colour Quality Scale CQS = 92.0
 Television Lighting Consistency Index TLCI = 91

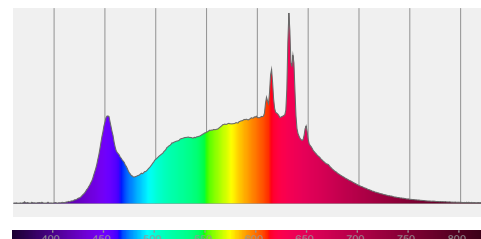

Relative spectral power distribution

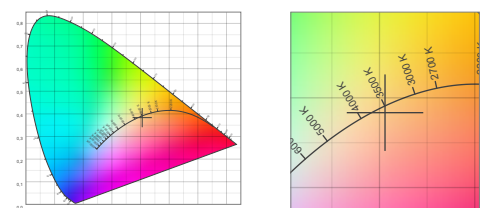

TM30 details

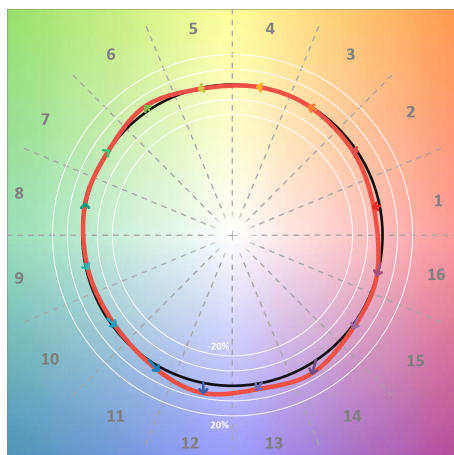


TM30 Colour vectors per hue bin




TM30 Colour distortion


Hue Bin	R_f	Shifts (%)	
		Chroma	Hue
C1	92	-4%	0%
C2	94	-2%	2%
C3	90	0%	5%
C4	93	0%	3%
C5	93	0%	3%
C6	94	3%	1%
C7	96	0%	-1%
C8	97	0%	-1%
C9	95	-1%	3%
C10	89	-2%	7%
C11	85	2%	9%
C12	89	7%	2%
C13	91	4%	-4%
C14	88	6%	-7%
C15	90	1%	-7%
C16	88	-1%	-7%

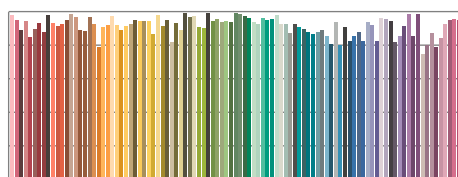

TM30-18 R_f -values per reference colour

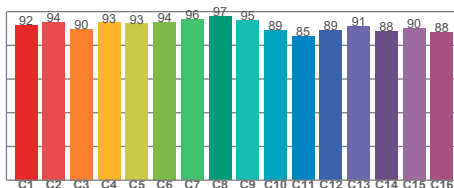


TM30-18 R_f -values per hue bin

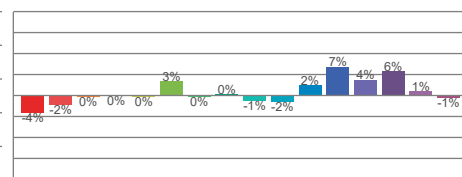


TM30 Chroma shift

Colour Quality details

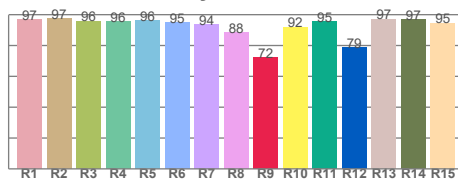

Colour Rendering Index

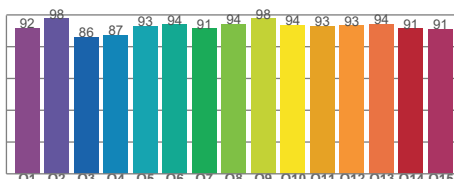

Colour Quality Scale

169-363 Track spot | 3-phase | white | 30W | 930-935-940 | 45° | dim

Flicker / temporal light artefacts details

Measurement conditions

Flicker meter type	Viso Systems LabFlicker
Flicker/TLA sample rate	20000 samples/s
Measurement time	5x 180 seconds (15 minutes) for PstLM. 1.2 sec for all other indices

Flicker indices according to Illuminating Engineering Society (IES)


Flicker frequency	99.5 Hz
Percent flicker	0.88 %
Flicker index	0

TLA indices (according IEC TR 61547-1, EN 61000-3-3 and EN 61000-4-15)


An LED luminaire is considered flicker-free if the SVM value is ≤ 0.4 and if the PstLM value is ≤ 1.0

PstLM value ($F < 80$ Hz)	0.31
SVM value ($80 < F < 2000$ Hz)	0.02


Flicker frame (one flicker period in time domain)

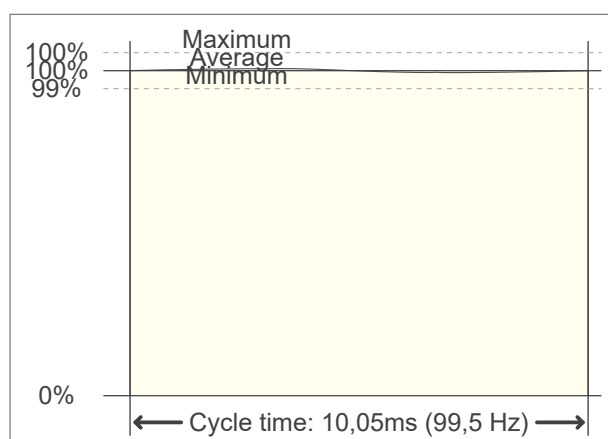

Flicker FFT (flicker curve in frequency domain)

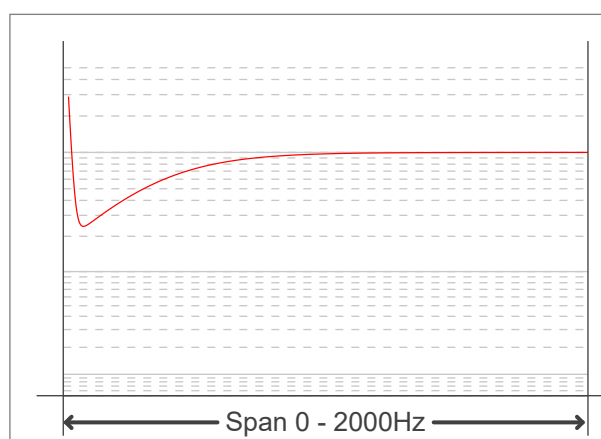

IEEE 1789-2015 Lighting Flicker Risk Zones

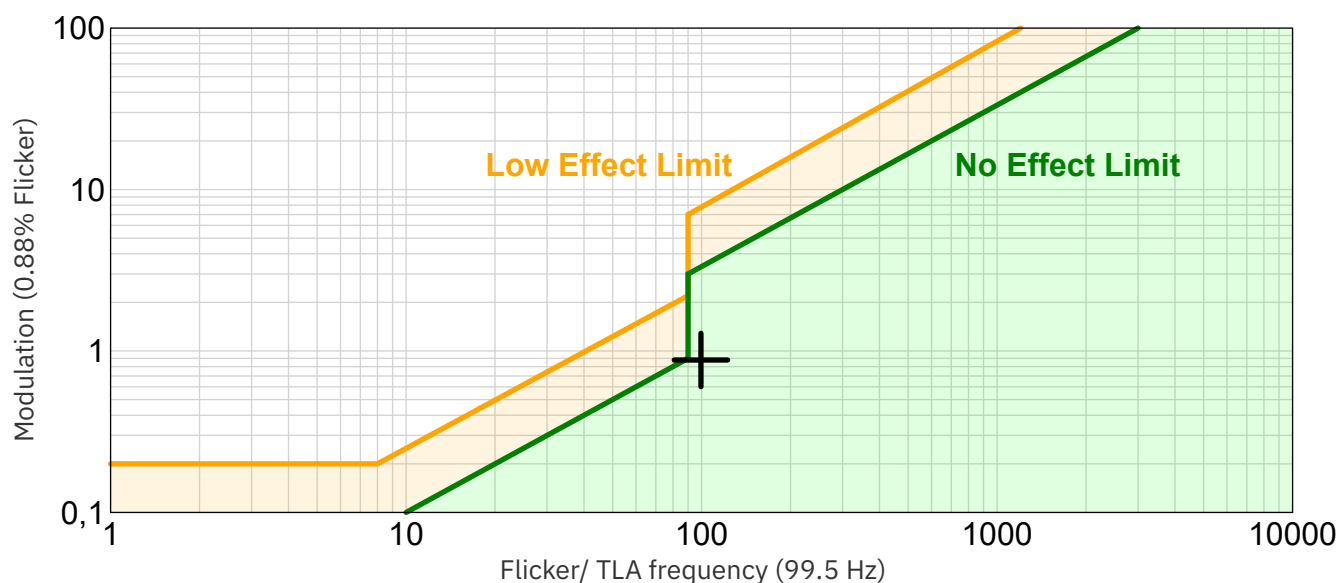


Document revision date: 1-7-2025 Measurement serial: VFR-250117-0075-MS

169-363 Track spot | 3-phase | white | 30W | 930-935-940 | 45° | dim

Beam angle

Luminous Intensity diagram

Unit: 0-100% of peak intensity

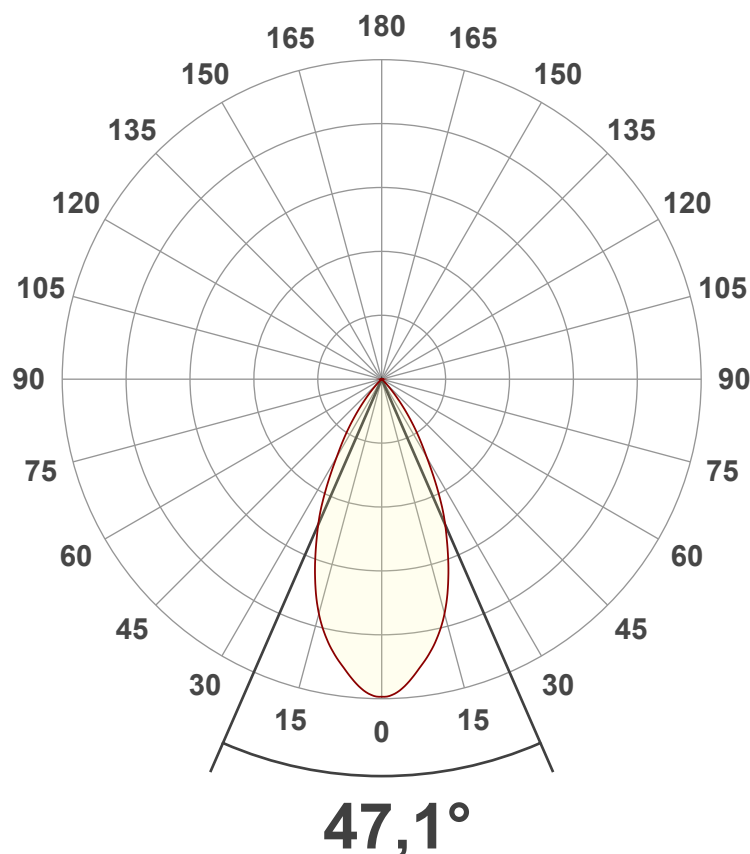

Main Values

Output (total Lumen)	2416 lm
Lumen Up/Down	0.1% / 99.9%
Peak Intensity	3842 cd
Beam Angle (50%)	47.1°
Beam Angle (90%)	47.1°
Beam Angle (10%)	47.1°

Cut-off Angle

Average 2.5%	87.8°
--------------	-------

Field Angle

Average 10%	76.4°
-------------	-------


Intensity Ratio

In 120° cone	99.5%
In 90° cone	98.7%

C planes

C000-C180
C090-C270


Linear distribution diagram - Intensity (candela) vs γ-angle

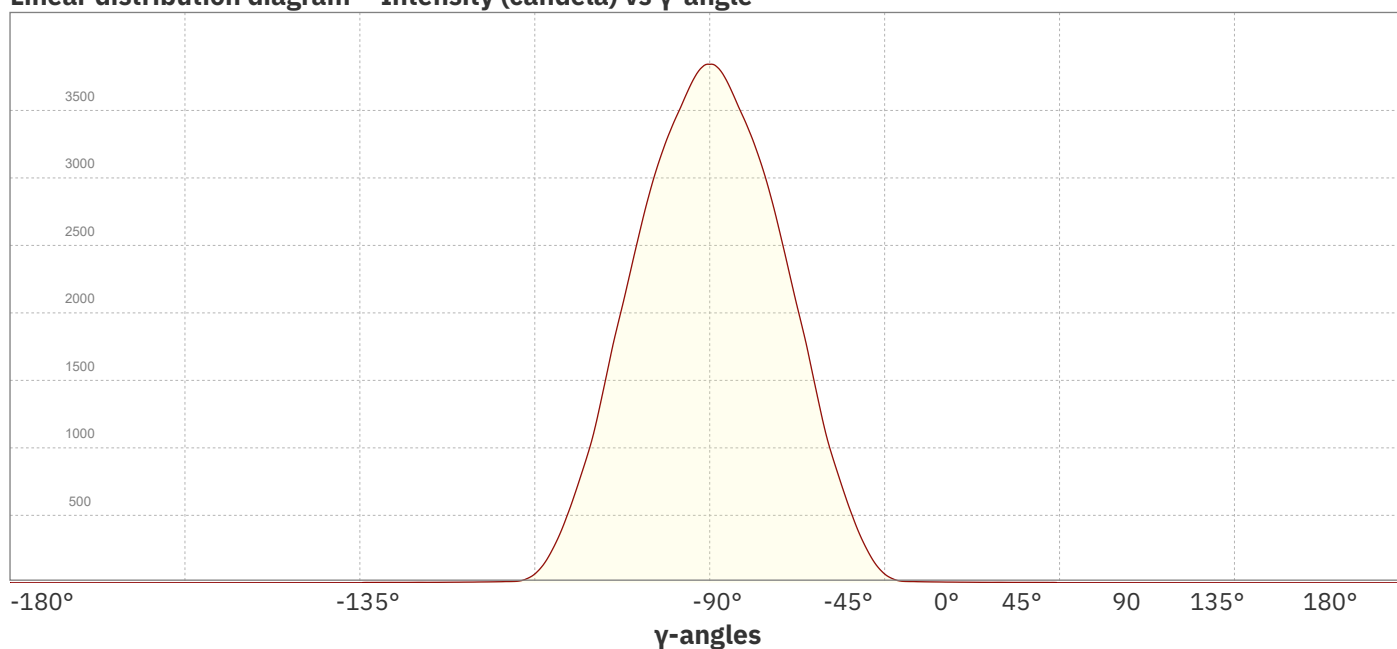

Document revision date: 1-7-2025 Measurement serial: VFR-250117-0075-MS

169-363 Track spot | 3-phase | white | 30W | 930-935-940 | 45° | dim

Beam Details

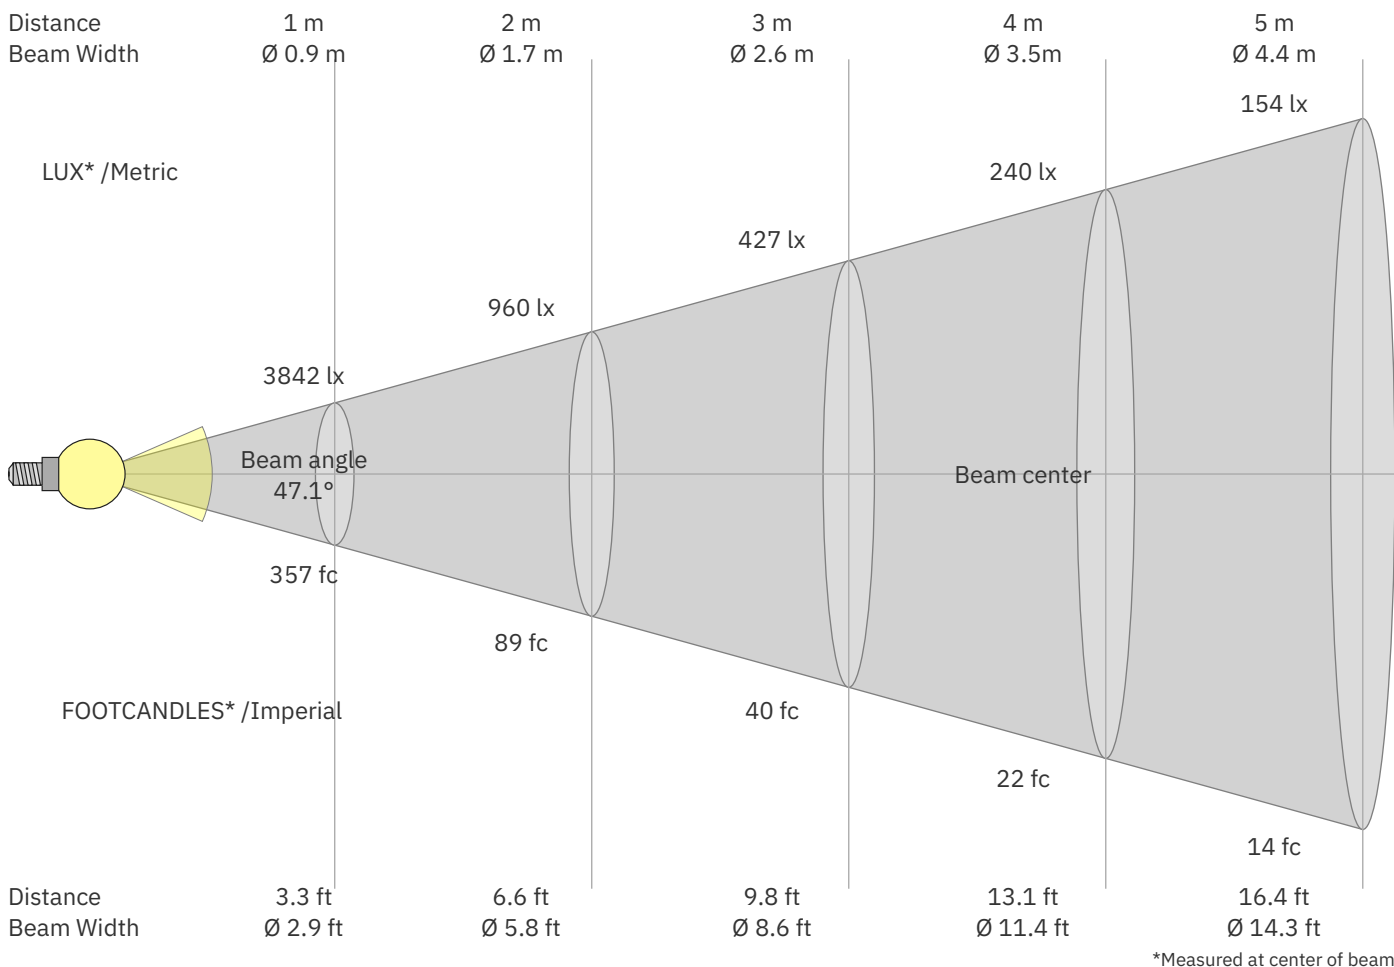

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6	ft
3842	960	427	240	154	107	78	60	47	38	32	27	23	20	17	15	13	12	11	10	lux
356.9	89.2	39.7	22.3	14.3	9.9	7.3	5.6	4.4	3.6	2.9	2.5	2.1	1.8	1.6	1.4	1.2	1.1	1	0.9	fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
3842	3819	3738	3620	3490	3358	3208	3034	2831	2600	2355	2107	1870	1612	1343	1093	895	717	550	399	cd
100%	99%	97%	94%	91%	87%	83%	79%	74%	68%	61%	55%	49%	42%	35%	28%	23%	19%	14%	10%	of 0°val

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
3842	3819	3738	3620	3490	3358	3208	3034	2831	2600	2355	2107	1870	1612	1343	1093	895	717	550	399	cd
100%	99%	97%	94%	91%	87%	83%	79%	74%	68%	61%	55%	49%	42%	35%	28%	23%	19%	14%	10%	of 0°val

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
3842	3819	3738	3620	3490	3358	3208	3034	2831	2600	2355	2107	1870	1612	1343	1093	895	717	550	399	cd
100%	99%	97%	94%	91%	87%	83%	79%	74%	68%	61%	55%	49%	42%	35%	28%	23%	19%	14%	10%	of 0°val

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
3842	3819	3738	3620	3490	3358	3208	3034	2831	2600	2355	2107	1870	1612	1343	1093	895	717	550	399	cd
100%	99%	97%	94%	91%	87%	83%	79%	74%	68%	61%	55%	49%	42%	35%	28%	23%	19%	14%	10%	of 0°val

169-363 Track spot | 3-phase | white | 30W | 930-935-940 | 45° | dim

Light Planning – UGR table

Uncorrected, comprehensive UGR table according to CIE 117-1995

Reflectances		70	70	50	50	30	70	70	50	50	30
ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room size		Viewed Crosswise					Viewed Endwise				
H = mounting height above eye level		(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
X	Y										
2H	2H	20.5	21.1	20.6	21.3	21.5	20.5	21.1	20.6	21.3	21.5
	3H	20.2	21.0	20.6	21.2	21.3	20.2	21.0	20.6	21.2	21.3
	4H	20.2	20.9	20.6	21.1	21.3	20.2	20.9	20.6	21.1	21.3
	6H	20.2	20.8	20.5	21.0	21.4	20.2	20.8	20.5	21.0	21.4
	8H	20.1	20.7	20.5	21.0	21.4	20.1	20.7	20.5	21.0	21.4
	12H	20.1	20.6	20.5	21.0	21.4	20.1	20.6	20.5	21.0	21.4
4H	2H	20.2	20.8	20.5	21.1	21.3	20.2	20.8	20.5	21.1	21.3
	3H	20.1	20.6	20.4	20.9	21.4	20.1	20.6	20.4	20.9	21.4
	4H	19.9	20.4	20.4	20.9	21.4	19.9	20.4	20.4	20.9	21.4
	6H	19.9	20.4	20.4	20.7	21.1	19.9	20.4	20.4	20.7	21.1
	8H	19.9	20.3	20.4	20.7	21.0	19.9	20.3	20.4	20.7	21.0
	12H	19.8	20.2	20.3	20.6	21.1	19.8	20.2	20.3	20.6	21.1
8H	4H	19.8	20.3	20.3	20.6	21.0	19.8	20.3	20.3	20.6	21.0
	6H	19.8	20.1	20.3	20.6	21.1	19.8	20.1	20.3	20.6	21.1
	8H	19.8	20.1	20.3	20.6	21.2	19.8	20.1	20.3	20.6	21.2
	12H	19.8	20.0	20.4	20.5	21.1	19.8	20.0	20.4	20.5	21.1
12H	4H	19.7	20.1	20.2	20.5	21.0	19.7	20.1	20.2	20.5	21.0
	6H	19.8	20.0	20.3	20.6	21.2	19.8	20.0	20.3	20.6	21.2
	8H	19.8	20.0	20.4	20.5	21.1	19.8	20.0	20.4	20.5	21.1
Variations with the observer position for the luminaire spacings. S:											
S = 1.0H		5.3 / -8.4					5.3 / -8.4				
S = 1.5H		7.9 / -8.6					7.9 / -8.6				
S = 2.0H		9.9 / -8.9					9.9 / -8.9				

Coefficients of Utilization

Ceiling reflectance	80			70			50			30			10			0		
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)																	
	Room Values are expressed as percentage of Lumen delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	106	106	106	102	102	102	100	
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	107	103	99	96	99	97	94	96	94	92	94	92	90	89
3	104	98	93	90	102	97	92	89	94	90	87	92	89	86	89	87	85	83
4	99	92	87	83	97	91	86	83	89	85	82	87	84	81	85	82	80	78
5	95	87	82	78	93	86	81	77	84	80	77	83	79	76	81	78	75	74
6	90	82	77	73	89	81	76	73	80	75	72	79	75	72	77	74	71	70
7	86	78	72	69	85	77	72	68	76	71	68	75	71	68	74	70	67	66
8	83	74	68	65	82	73	68	65	72	68	64	71	67	64	70	67	64	62
9	79	70	65	61	78	70	65	61	69	64	61	68	64	61	67	63	60	59
10	76	67	62	58	75	67	61	58	66	61	58	65	61	58	64	60	57	56