

173-015 4000K specific configuration
LED panel | 60*60 | 25W | 3-CCT | UGR19 | 30cm cbl GST18i3

Introduction

Purpose of this Document

This document provides information for 173-015 4000K. During measurement, the product is used in a different mode where output power, colour temperature and/or beam angle are changed from factory standard. These adjustments can be made without altering the product and are designed to be set by the installer. In most cases, the options are set through switches on the product.

Results

Total input power	23.5 W
Correlated Colour Temperature	4144 K
Total lumen output	3612 lm
Efficiency	153 lm/W

Electrical measurement details

Input Power


RMS Input voltage feed. V_{RMS}	230 V
RMS Input current feed. I_{RMS}	0.110 A
Total input power	23.5 W

Frequency of input power	50 Hz
Power factor	0.93
Displacement power factor	0.95

Total harmonic distortion of the current	23.67%
Total harmonic distortion of the voltage	2.41%

Input Power Curve

Voltage - Current

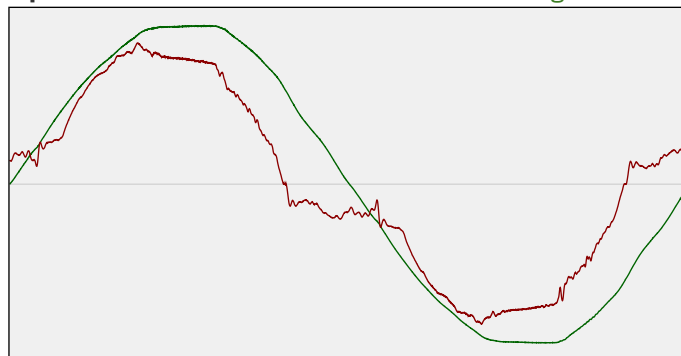

Efficiency

Radiated power efficiency: 46.3%




Lumen efficiency: 153 lm/W



Harmonics

3rd Harmonic	20.19%
5th Harmonic	11.36%
7th Harmonic	0.48%
9th Harmonic	0.81%
11th Harmonic	2.75%

Current Harmonics %

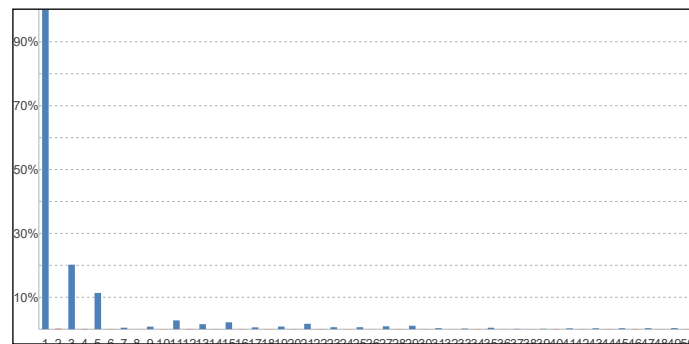


173-015 4000K specific configuration

Colour measurement details


Total lumen output 3612 lm
 Correlated Colour Temperature 4144 K
 Colour coordinates CIE 1931 (x;y) = (0.372;0.363)
 Colour deviation from BBL Duv = -0.0040

TM30-18 Colour Fidelity Index R_f 82.4
 TM30-18 Colour Gamut Index R_g 101.9
 Colour Rendering Index (Ra) CRI 85.9
 Colour Rendering Index. (red component) $R_9 = 50.5$


Colour Quality Scale CQS = 82.7
 Television Lighting Consistency Index TLCI = 73

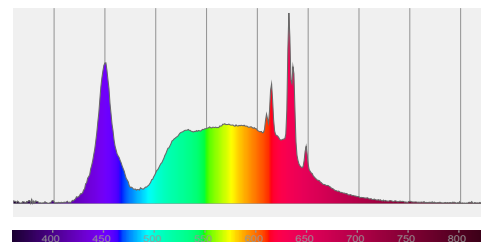

Relative spectral power distribution

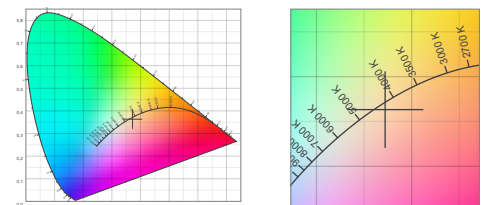

TM30 details

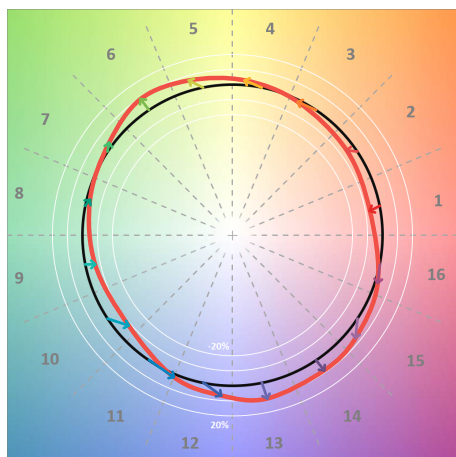


TM30 Colour vectors per hue bin




TM30 Colour distortion


Hue Bin	R_f	Shifts (%)	
		Chroma	Hue
C1	87	-7%	-2%
C2	88	-6%	5%
C3	75	-2%	13%
C4	81	3%	12%
C5	83	7%	8%
C6	86	9%	1%
C7	91	2%	-5%
C8	91	-2%	-4%
C9	89	-7%	1%
C10	76	-9%	12%
C11	71	0%	20%
C12	75	6%	13%
C13	86	11%	1%
C14	85	9%	1%
C15	83	6%	-11%
C16	81	1%	-12%

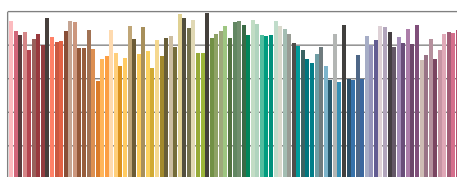

TM30-18 R_f -values per reference colour

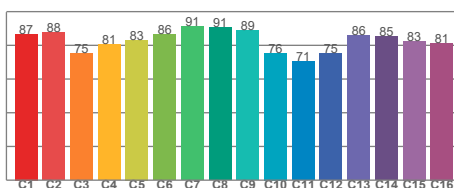


TM30-18 R_f -values per hue bin

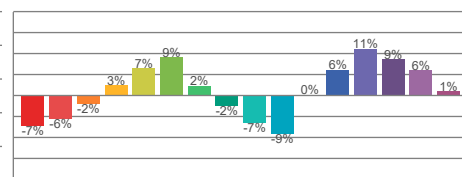


TM30 Chroma shift

Colour Quality details

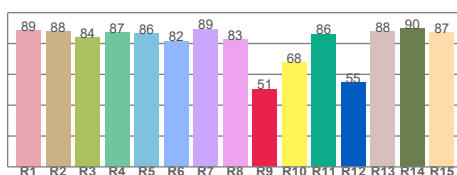

Colour Rendering Index

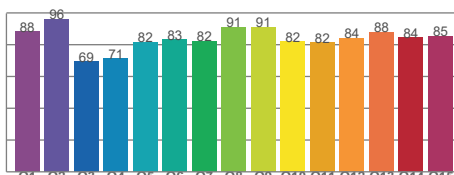

Colour Quality Scale