

173-050 5700K specific configuration
LED panel | 60*60 | 36W | 3-CCT | 2m cable EU plug

Introduction

Purpose of this Document

This document provides information for 173-050 5700K. During measurement, the product is used in a different mode where output power, colour temperature and/or beam angle are changed from factory standard. These adjustments can be made without altering the product and are designed to be set by the installer. In most cases, the options are set through switches on the product.

Results

Total input power	36.5 W
Correlated Colour Temperature	6107 K
Total lumen output	3993 lm
Efficiency	109 lm/W

Electrical measurement details

Input Power


RMS Input voltage feed. V_{RMS}	230 V
RMS Input current feed. I_{RMS}	0.162 A
Total input power	36.5 W

Frequency of input power	50 Hz
Power factor	0.98
Displacement power factor	0.98

Total harmonic distortion of the current	7.97%
Total harmonic distortion of the voltage	2.57%

Input Power Curve

Voltage - Current

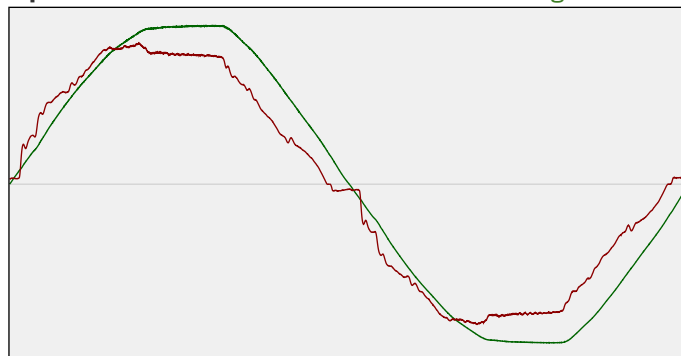

Efficiency

Radiated power efficiency: 35.2%




Lumen efficiency: 109 lm/W



Harmonics

3rd Harmonic	3.36%
5th Harmonic	5.29%
7th Harmonic	1.84%
9th Harmonic	2.19%
11th Harmonic	2.29%

Current Harmonics %

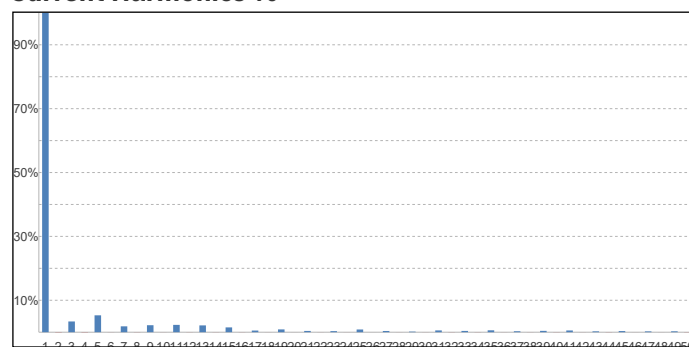


173-050 5700K specific configuration

Colour measurement details


Total lumen output 3993 lm
 Correlated Colour Temperature 6107 K
 Colour coordinates CIE 1931 (x;y) = (0.320;0.331)
 Colour deviation from BBL Duv = 0.0005

TM30-18 Colour Fidelity Index R_f 82.8
 TM30-18 Colour Gamut Index R_g 94.8
 Colour Rendering Index (Ra) CRI 84.7
 Colour Rendering Index. (red component) $R_9 = 16.5$


Colour Quality Scale CQS = 80.5
 Television Lighting Consistency Index TLCI = 75

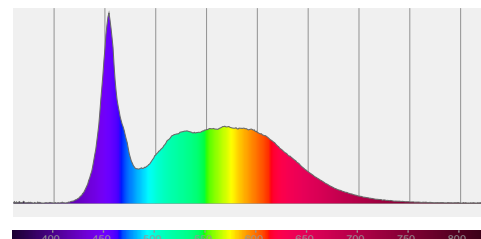

Relative spectral power distribution

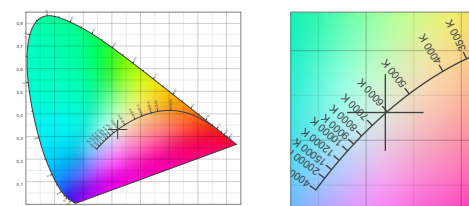

TM30 details

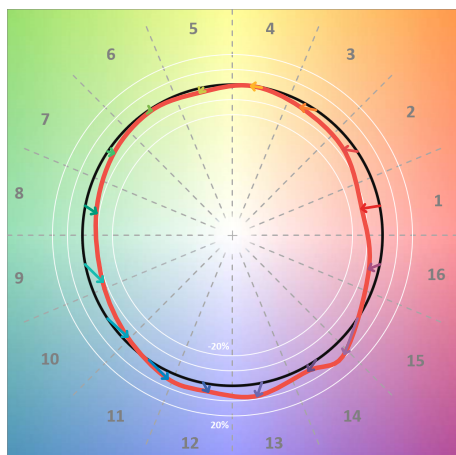


TM30 Colour vectors per hue bin




TM30 Colour distortion


Hue Bin	R_f	Shifts (%)	
		Chroma	Hue
C1	76	-12%	0%
C2	84	-7%	6%
C3	81	-4%	9%
C4	86	0%	7%
C5	86	-3%	3%
C6	93	-1%	-1%
C7	92	-4%	-1%
C8	85	-8%	3%
C9	82	-9%	14%
C10	72	-4%	17%
C11	72	3%	17%
C12	89	5%	4%
C13	87	8%	-5%
C14	85	3%	-8%
C15	72	6%	-24%
C16	86	-7%	-4%

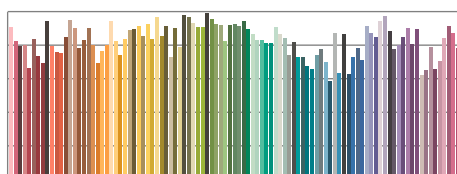

TM30-18 R_f -values per reference colour

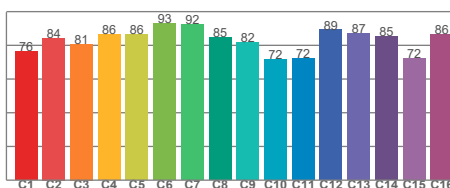


TM30-18 R_f -values per hue bin

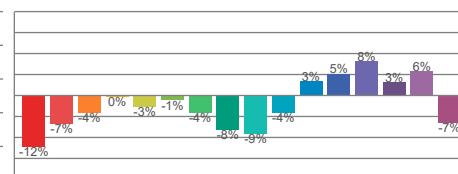


TM30 Chroma shift

Colour Quality details

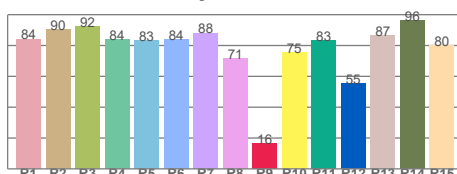

Colour Rendering Index

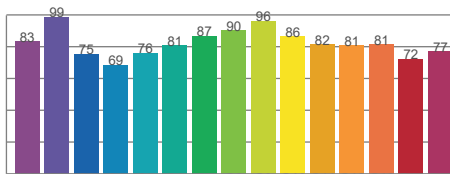

Colour Quality Scale