

173-051 5700K specific configuration
LED panel | 30*120 | 36W | 3-CCT | 2m cable EU plug

Introduction

Purpose of this Document

This document provides information for 173-051 5700K. During measurement, the product is used in a different mode where output power, colour temperature and/or beam angle are changed from factory standard. These adjustments can be made without altering the product and are designed to be set by the installer. In most cases, the options are set through switches on the product.

Results

Total input power	36.4 W
Correlated Colour Temperature	6289 K
Total lumen output	3954 lm
Efficiency	109 lm/W

Electrical measurement details

Input Power


RMS Input voltage feed. V_{RMS}	230 V
RMS Input current feed. I_{RMS}	0.162 A
Total input power	36.4 W

Frequency of input power	50 Hz
Power factor	0.98
Displacement power factor	0.98

Total harmonic distortion of the current	8.05%
Total harmonic distortion of the voltage	2.66%

Input Power Curve

Voltage - Current

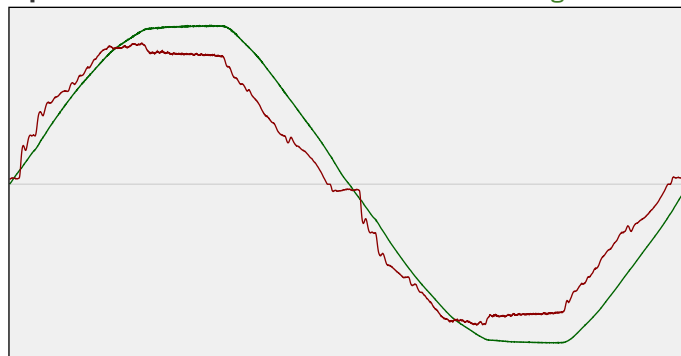

Efficiency

Radiated power efficiency: 34.3%




Lumen efficiency: 109 lm/W



Harmonics

3rd Harmonic	3.37%
5th Harmonic	5.41%
7th Harmonic	1.89%
9th Harmonic	2.18%
11th Harmonic	2.34%

Current Harmonics %

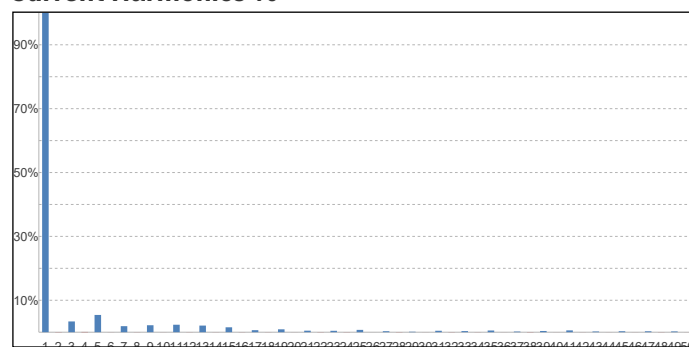


173-051 5700K specific configuration

Colour measurement details


Total lumen output 3954 lm
 Correlated Colour Temperature 6289 K
 Colour coordinates CIE 1931 (x;y) = (0.317;0.328)
 Colour deviation from BBL Duv = 0.0004

TM30-18 Colour Fidelity Index R_f 80.9
 TM30-18 Colour Gamut Index R_g 101.1
 Colour Rendering Index (Ra) CRI 83.2
 Colour Rendering Index. (red component) $R_9 = 52.9$


Colour Quality Scale CQS = 80.9
 Television Lighting Consistency Index TLCI = 78

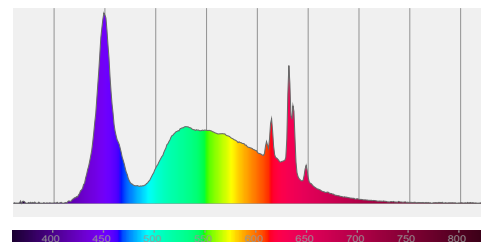

Relative spectral power distribution

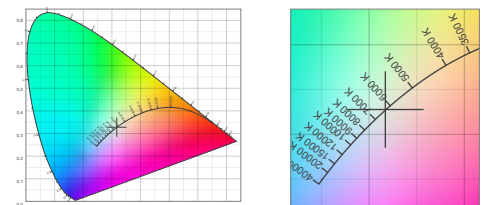

TM30 details

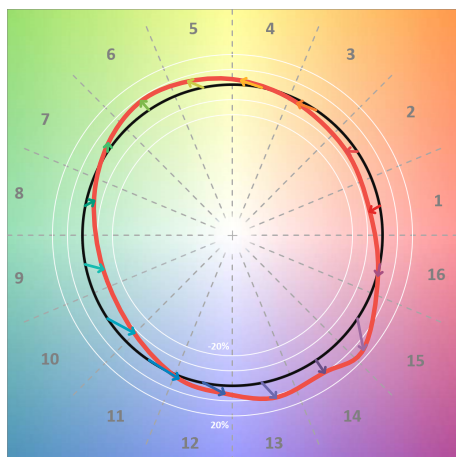


TM30 Colour vectors per hue bin




TM30 Colour distortion


Hue Bin	R_f	Shifts (%)	
		Chroma	Hue
C1	85	-7%	-2%
C2	87	-6%	4%
C3	77	-3%	13%
C4	77	2%	14%
C5	81	6%	9%
C6	88	8%	1%
C7	92	3%	-5%
C8	88	-5%	-4%
C9	85	-11%	5%
C10	68	-9%	18%
C11	64	-1%	23%
C12	77	4%	15%
C13	84	12%	7%
C14	82	10%	0%
C15	78	15%	-15%
C16	88	0%	-7%

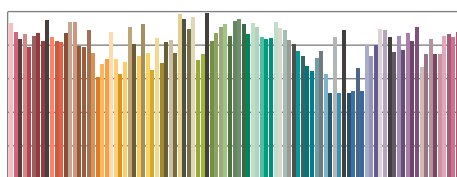

TM30-18 R_f -values per reference colour

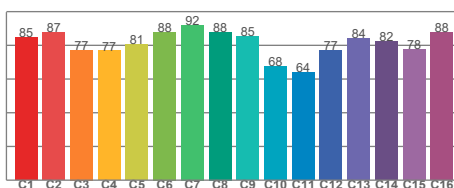


TM30-18 R_f -values per hue bin

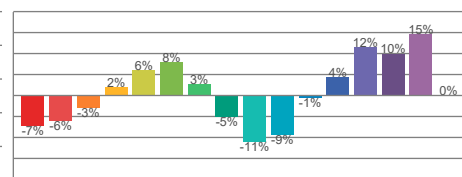


TM30 Chroma shift

Colour Quality details

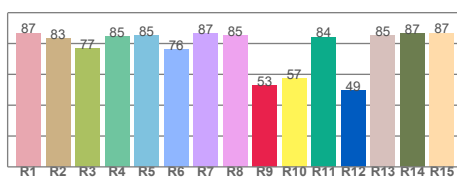

Colour Rendering Index

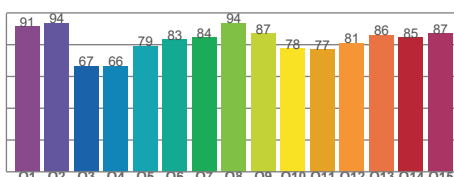

Colour Quality Scale