

173-064 3000K specific configuration
LED panel | reflector | 60*60 | 3-CCT | white | GST18i3

Introduction

Purpose of this Document

This document provides information for 173-064 3000K. During measurement, the product is used in a different mode where output power, colour temperature and/or beam angle are changed from factory standard. These adjustments can be made without altering the product and are designed to be set by the installer. In most cases, the options are set through switches on the product.

Results

Total input power	24.7 W
Correlated Colour Temperature	3120 K
Total lumen output	3599 lm
Efficiency	146 lm/W

Electrical measurement details

Input Power


RMS Input voltage feed. V_{RMS}	231 V
RMS Input current feed. I_{RMS}	0.115 A
Total input power	24.7 W

Frequency of input power	50 Hz
Power factor	0.93
Displacement power factor	0.95

Total harmonic distortion of the current	21.99%
Total harmonic distortion of the voltage	2.26%

Input Power Curve

Voltage - Current

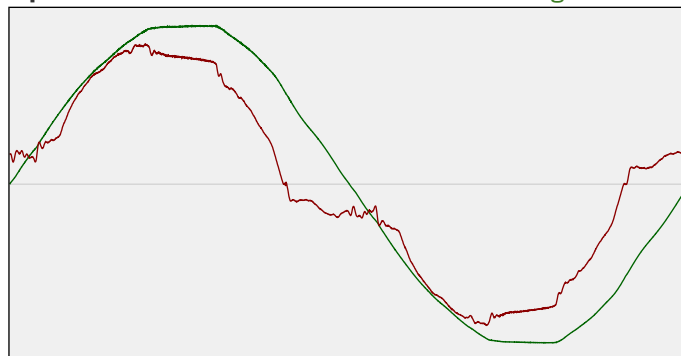

Efficiency

Radiated power efficiency: 44.8%




Lumen efficiency: 146 lm/W



Harmonics

3rd Harmonic	18.4%
5th Harmonic	11.18%
7th Harmonic	0.28%
9th Harmonic	0.83%
11th Harmonic	2.97%

Current Harmonics %

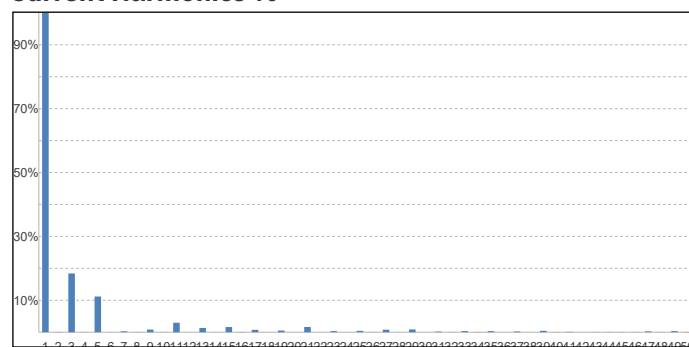


173-064 3000K specific configuration

Colour measurement details


Total lumen output 3599 lm
 Correlated Colour Temperature 3120 K
 Colour coordinates CIE 1931 (x;y) = (0.424;0.391)
 Colour deviation from BBL Duv = -0.0033

TM30-18 Colour Fidelity Index R_f 84.2
 TM30-18 Colour Gamut Index R_g 97.3
 Colour Rendering Index (Ra) CRI 83.8
 Colour Rendering Index. (red component) $R_9 = 12.0$


Colour Quality Scale CQS = 81.7
 Television Lighting Consistency Index TLCI = 69

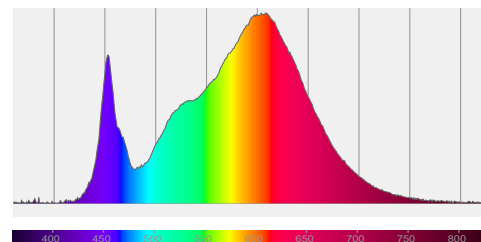

Relative spectral power distribution

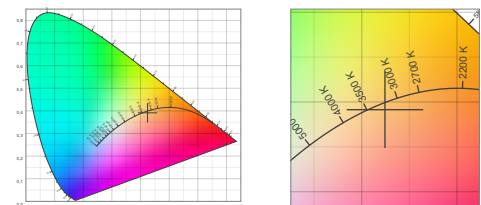

TM30 details

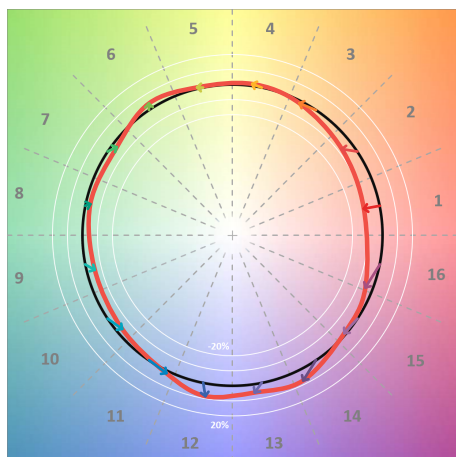


TM30 Colour vectors per hue bin




TM30 Colour distortion


Hue Bin	R_f	Shifts (%)	
		Chroma	Hue
C1	81	-11%	0%
C2	82	-8%	7%
C3	77	-2%	12%
C4	89	1%	7%
C5	91	1%	4%
C6	92	4%	-2%
C7	88	-3%	-6%
C8	93	-3%	-2%
C9	89	-6%	5%
C10	79	-4%	11%
C11	79	1%	14%
C12	85	9%	3%
C13	88	6%	-6%
C14	80	7%	-15%
C15	80	-2%	-13%
C16	77	-6%	-17%

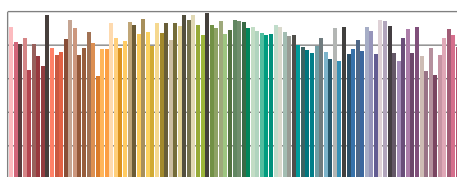

TM30-18 R_f -values per reference colour

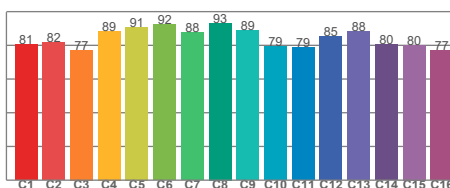


TM30-18 R_f -values per hue bin

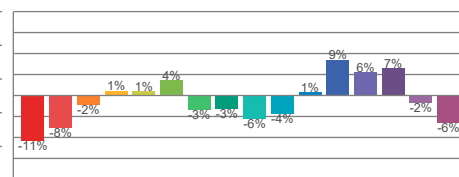


TM30 Chroma shift

Colour Quality details

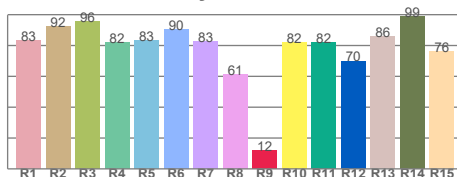

Colour Rendering Index

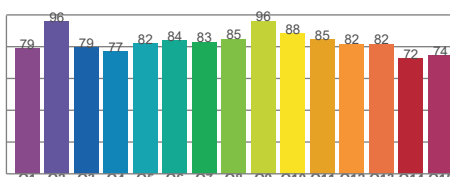

Colour Quality Scale