

174-275 3000K specific configuration
LED panel | butterfly | 60*60 | 3-CCT | UGR19 | dim.

Introduction

Purpose of this Document

This document provides information for 174-275 3000K. During measurement, the product is used in a different mode where output power, colour temperature and/or beam angle are changed from factory standard. These adjustments can be made without altering the product and are designed to be set by the installer. In most cases, the options are set through switches on the product.

Results

Total input power	34.6 W
Correlated Colour Temperature	3066 K
Total lumen output	3440 lm
Efficiency	99 lm/W

Electrical measurement details

Input Power


RMS Input voltage feed. V_{RMS}	228 V
RMS Input current feed. I_{RMS}	0.156 A
Total input power	34.6 W

Frequency of input power	50 Hz
Power factor	0.97
Displacement power factor	0.98

Total harmonic distortion of the current	13.97%
Total harmonic distortion of the voltage	2.63%


Input Power Curve

Voltage - Current

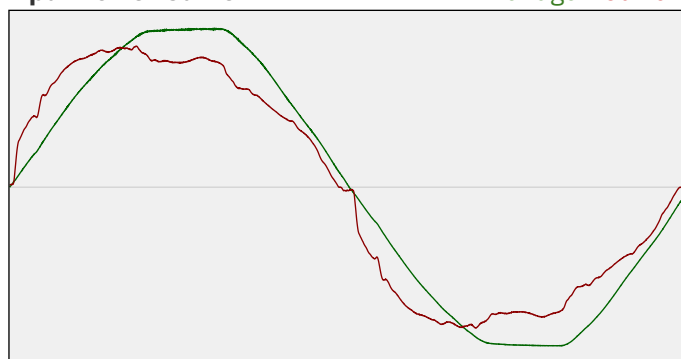

Efficiency

Radiated power efficiency: 29.9%




Lumen efficiency: 99 lm/W



Harmonics

3rd Harmonic	12.4%
5th Harmonic	4.8%
7th Harmonic	1.8%
9th Harmonic	2.14%
11th Harmonic	0.49%

Current Harmonics %

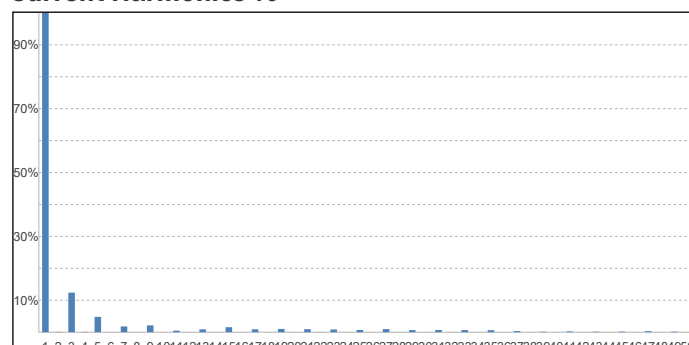


174-275 3000K specific configuration

Colour measurement details


Total lumen output 3440 lm
 Correlated Colour Temperature 3066 K
 Colour coordinates CIE 1931 (x;y) = (0.430;0.397)
 Colour deviation from BBL Duv = -0.0018

TM30-18 Colour Fidelity Index R_f 83.9
 TM30-18 Colour Gamut Index R_g 97.8
 Colour Rendering Index (Ra) CRI 82.7
 Colour Rendering Index. (red component) $R_9 = 4.2$


Colour Quality Scale CQS = 81.2
 Television Lighting Consistency Index TLCI = 65

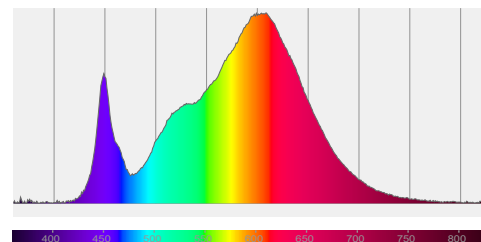

Relative spectral power distribution

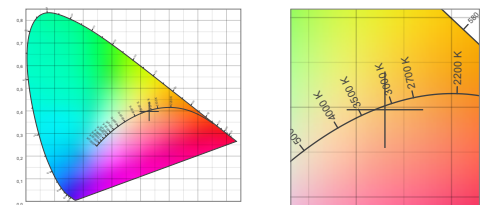

TM30 details

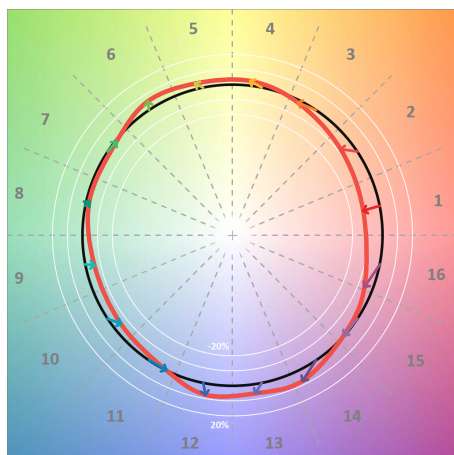


TM30 Colour vectors per hue bin




TM30 Colour distortion


Hue Bin	R_f	Shifts (%)	
		Chroma	Hue
C1	80	-11%	-1%
C2	80	-8%	8%
C3	76	-3%	13%
C4	86	3%	8%
C5	91	4%	5%
C6	90	5%	-3%
C7	86	-1%	-9%
C8	93	-2%	-3%
C9	90	-6%	2%
C10	83	-5%	8%
C11	80	-1%	13%
C12	86	8%	3%
C13	88	6%	-6%
C14	80	7%	-15%
C15	78	-1%	-14%
C16	77	-7%	-17%

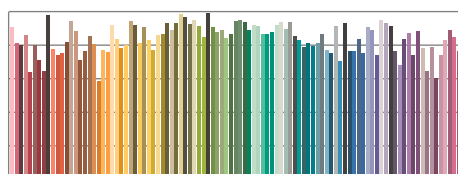

TM30-18 R_f -values per reference colour

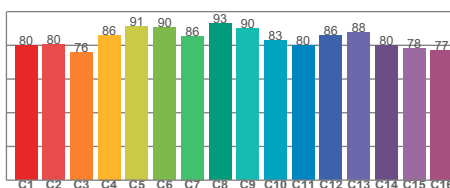


TM30-18 R_f -values per hue bin

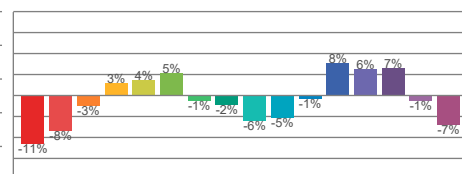


TM30 Chroma shift

Colour Quality details

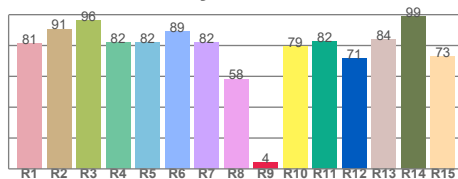

Colour Rendering Index

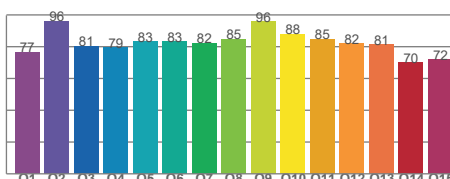

Colour Quality Scale