

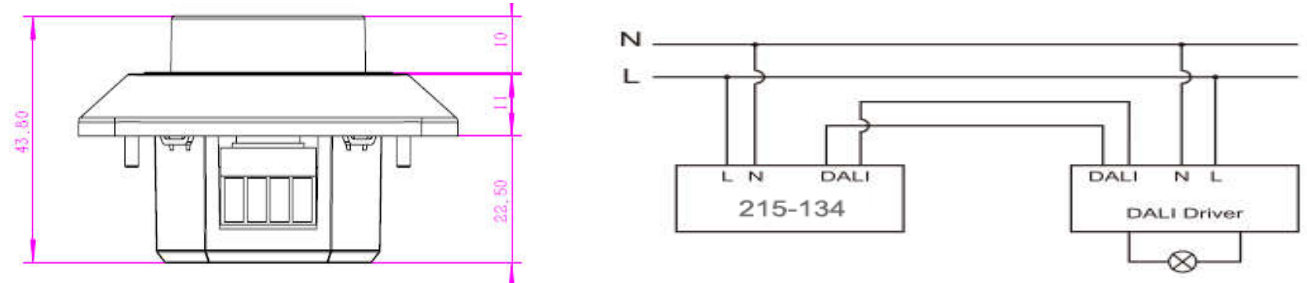
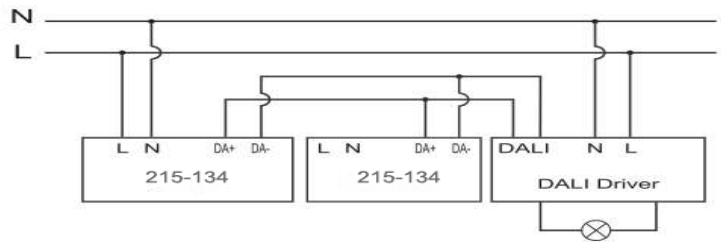


|                                              |                                 |                                   |
|----------------------------------------------|---------------------------------|-----------------------------------|
| SPECIFICATION                                |                                 |                                   |
| Description                                  | Dimmer for DALI dimmable Driver |                                   |
| Electrical Characteristics                   | Output DALI signal              |                                   |
| Product Name                                 |                                 | 215-134                           |
| Input Parameters                             |                                 |                                   |
| Rated Input Voltage                          | Uin                             | 220-240VAC                        |
| Input Current (Full load)                    | Iin                             | 15mA                              |
| Input Frequency                              | fin                             | 50/60Hz                           |
| Maximum Input Power                          | Pin                             | 1.6W                              |
| Power Factor (Full load)                     | λ                               |                                   |
| Efficiency (Full load)                       | η                               |                                   |
| No-load power                                |                                 | ≤0.3W                             |
| Inrush current                               |                                 |                                   |
| Turn on time                                 |                                 |                                   |
| Output Parameters                            |                                 |                                   |
| Output Voltage                               | Vout                            | 17±0.5V                           |
| Output Current (Full load)                   | Iout                            | 52mA                              |
| Output Power (Full load)                     | Pout                            | 0.6W                              |
| Operating Frequency(Full load)               | Fout                            |                                   |
| The number of driver connected to the dimmer |                                 | 26pcs                             |
| Dimming range                                |                                 | 1...100%                          |
| Ripple & Noise                               |                                 |                                   |
| Load Regulation                              |                                 |                                   |
| Line Regulation                              |                                 |                                   |
| Ambient                                      |                                 |                                   |
| Storage Temperature                          | ts                              | -20 ...+ 70℃                      |
| Operating Ambient Temperature                | ta                              | -20 ...+ 45℃                      |
| Case Temperature at tc Point                 | tc                              | 85℃                               |
| Relative humidity                            |                                 | 5 ...85%                          |
| Protection                                   |                                 |                                   |
| Over Current                                 |                                 | Auto-recovery if fault is removed |
| Over Voltage                                 |                                 | Auto-recovery if fault is removed |
| Short Circuit                                |                                 |                                   |
| System Parameters                            |                                 |                                   |
| Weight                                       |                                 | 120g                              |
| Dimensions(LxWxH):                           |                                 | 83.5x83.5x44mm                    |
| Compliances and approvals                    |                                 |                                   |
| Safety                                       |                                 |                                   |
| RFI                                          |                                 |                                   |
| Harmonics                                    |                                 |                                   |
| Immunity                                     |                                 |                                   |

Physical Parameter including plate 215-132

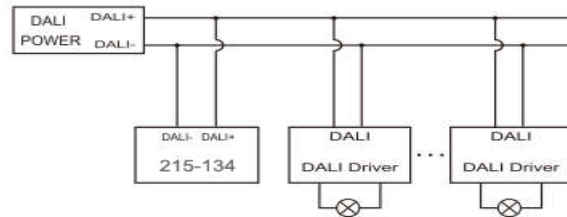

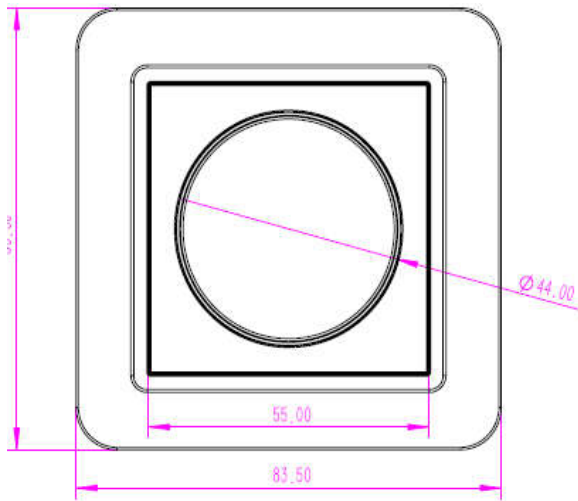

Housing Material:PC Plastic

Captured Terminal Screw for 0.75~1.5mm<sup>2</sup>

